

**11-28 31<sup>ST</sup> DRIVE**  
**QUEENS, NEW YORK**

---

# **Remedial Action Work Plan**

**NYC VCP Site Number: 13CVCP145Q**  
**NYC E-Designation Site Number: 13EH-A359Q**

**Prepared for:**

Mr. George Mann  
11-28 31<sup>st</sup> Drive  
Queens, New York 11106  
Morganconstruction1@verizon.net

**Prepared by:**

Hydro Tech Environmental, Corp.  
15 Ocean Avenue, 2<sup>nd</sup> Floor  
Brooklyn, New York 11225  
Phone: (718) 636-0800

---

**JULY 2013**

# **REMEDIAL ACTION WORK PLAN**

## **TABLE OF CONTENTS**

TABLE OF CONTENTS.....	ii
LIST OF ACRONYMS .....	v
CERTIFICATION .....	1
EXECUTIVE SUMMARY .....	2
REMEDIAL ACTION WORK PLAN.....	11
1.0 SITE BACKGROUND.....	11
1.1 Site Location and Current Usage .....	11
1.2 Proposed Redevelopment Plan .....	11
1.3 Description of Surrounding Property.....	12
1.4 Remedial Investigation .....	12
2.0 REMEDIAL ACTION OBJECTIVES.....	16
3.0 REMEDIAL ALTERNATIVES ANALYSIS.....	17
3.1 Threshold Criteria .....	19
3.2 Balancing Criteria .....	20
4.0 REMEDIAL ACTION .....	27
4.1 Summary of Preferred Remedial Action.....	27
4.2 Soil Cleanup Objectives and Soil/Fill Management.....	29
4.3 Engineering Controls .....	33
4.4 Institutional Controls .....	35
4.5 Site Management Plan .....	36
4.6 Qualitative Human Health Exposure Assessment .....	36
5.0 REMEDIAL ACTION MANAGEMENT .....	41
5.1 Project Organization and Oversight.....	41
5.2 Site Security .....	41
5.3 Work Hours.....	41
5.4 Construction Health and Safety Plan (HASP) .....	41
5.5 Community Air Monitoring Plan.....	42
5.6 Agency Approvals .....	44

5.7	Site Preparation .....	45
5.8	Traffic Control .....	48
5.9	Demobilization.....	49
5.10	Reporting and Record Keeping.....	49
5.11	Complaint Management.....	50
5.12	Deviations from the Remedial Action Work Plan .....	50
6.0	REMEDIAL ACTION REPORT .....	52
7.0	Schedule .....	54

## **FIGURES**

- Figure-1: Site Location Map
- Figure-2: Proposed Redevelopment Plan
- Figure-3: Land-Use Map
- Figure-4: Location of Planned Excavation
- Figure-5: Waste Transport Vehicles Route
- Figure-6: Alpha-Numeric Site Map

## **APPENDICES**

- Appendix 1: Citizen Participation Plan
- Appendix 2: Sustainability Statement
- Appendix 3: Soil/Materials Management Plan
- Appendix 5: Vapor Barrier and Active SSDS
- Appendix 4: Construction Health and Safety Plan

## LIST OF ACRONYMS

Acronym	Definition
AOC	Area of Concern
AS/SVE	Air Sparging/Soil Vapor Extraction
BOA	Brownfield Opportunity Area
CAMP	Community Air Monitoring Plan
C/D	Construction/Demolition
COC	Certificate of Completion
CQAP	Construction Quality Assurance Plan
CSOP	Contractors Site Operation Plan
DCR	Declaration of Covenants and Restrictions
ECs/ICs	Engineering and Institutional Controls
HASP	Health and Safety Plan
IRM	Interim Remedial Measure
BCA	Brownfield Cleanup Agreement
MNA	Monitored Natural Attenuation
NOC	Notice of Completion
NYC VCP	New York City Voluntary Cleanup Program
NYC DEP	New York City Department of Environmental Protection
NYC DOHMH	New York State Department of Health and Mental Hygiene
NYCRR	New York Codes Rules and Regulations
NYC OER	New York City Office of Environmental Remediation
NYS DEC	New York State Department of Environmental Conservation
NYS DEC DER	New York State Department of Environmental Conservation Division of Environmental Remediation
NYS DOH	New York State Department of Health
NYS DOT	New York State Department of Transportation
ORC	Oxygen-Release Compound
OSHA	United States Occupational Health and Safety Administration
PE	Professional Engineer

PID	Photo Ionization Detector
QEP	Qualified Environmental Professional
QHHEA	Qualitative Human Health Exposure Assessment
RAOs	Remedial Action Objectives
RAR	Remedial Action Report
RAWP	Remedial Action Work Plan or Plan
RCA	Recycled Concrete Aggregate
RD	Remedial Design
RI	Remedial Investigation
RMZ	Residual Management Zone
SCOs	Soil Cleanup Objectives
SCG	Standards, Criteria and Guidance
SMP	Site Management Plan
SPDES	State Pollutant Discharge Elimination System
SVOC	Semi-Volatile Organic Compound
USGS	United States Geological Survey
UST	Underground Storage Tank
VOC	Volatile Organic Compound

# CERTIFICATION

I, Shaik A. Saad, am a Professional Engineer licensed in the State of New York. I have primary direct responsibility for implementation of the remedial action for the 11-28 31<sup>st</sup> Drive Site, (NYC VCP Site No.13CVCP145Q)

I, Mark E. Robbins am a Qualified Environmental Professional as defined in §43-140. I have primary direct responsibility for implementation of the remedial action for the 11-28 31<sup>st</sup> Drive Site, (NYC VCP Site No.13CVCP145Q)

I certify that this Remedial Action Work Plan (RAWP) has a plan for handling, transport and disposal of soil, fill, fluids and other materials removed from the property in accordance with applicable City, State and Federal laws and regulations. Importation of all soil, fill and other material from off-Site will be in accordance with all applicable City, State and Federal laws and requirements. This RAWP has provisions to control nuisances during the remediation and all invasive work, including dust and odor suppression.

Shaik A. Saad

Name

071078

NYS PE License Number

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

PE Stamp

Mark E. Robbins

QEP Name

  
\_\_\_\_\_  
QEP Signature

\_\_\_\_\_  
Date

## **EXECUTIVE SUMMARY**

Mr. George Mann has enrolled in the New York City Voluntary Brownfield Cleanup Program (NYC VCP) to investigate and remediate a 2,416.40-square foot site located at 11-28 31<sup>st</sup> Drive in the Astoria section in Queens, New York. A remedial investigation (RI) was performed to compile and evaluate data and information necessary to develop this Remedial Action Work Plan (RAWP). The remedial action described in this document provides for the protection of public health and the environment consistent with the intended property use, complies with applicable environmental standards, criteria and guidance and conforms to applicable laws and regulations.

### **Site Location and Current Usage**

The Site is located at 11-28 31<sup>st</sup> Drive in the Astoria section in Queens, New York and is identified as Block 502 and Lot 22 on the New York City Tax Map. **Figure 1** shows the Site location. The Site is 2,416.40-square feet and is bounded by 31<sup>st</sup> Drive to the north-northeast, a vacant land and a 1-story manufacturing building to the south-southwest, a 1-story cabinet manufacturing facility to the east-southeast and a vacant 1-story warehouse to the west-northwest. Currently, the Site is vacant and contains a 1-story building that was until most recently occupied by a manufacturing facility of wood cabinets.

### **Summary of Proposed Redevelopment Plan**

The proposed future use of the Site will consist of residential use. The Site will be developed into 6-story building with slab on grade, plus stair/elevator and bulkhead. The footprint of the building will be approximately 1,550 square feet. The proposed slab on grade will be 6 inches in thickness. Column footings and grade beam footings will be installed at approximately 2 feet 6 inches below grade surface. An elevator pit approximately 8 feet 8 inches long and 6 feet 8 inches wide will be located in the east-central portion and the will be 8 and will extend 5 feet 8 inches below grade surface. Below the elevator shaft a 2-feet thick concrete base will be installed. The first floor will consist of a residential apartment and mechanical/janitorial space. Upper second to 5 floors will each consist of two residential apartments. A landscaped rear yard

of approximately 850 square feet will exist in the rear southwestern portion of the Site. A layout of the proposed site development is presented in **Figure 2**. The current zoning designation is R6 residential district.

### **Summary of the Remedy**

The proposed remedial action achieves protection of public health and the environment for the intended use of the property. The proposed remedial action achieves all of the remedial action objectives established for the project and addresses applicable standards, criterion, and guidance; is effective in both the short-term and long-term and reduces mobility, toxicity and volume of contaminants; is cost effective and implementable; and uses standards methods that are well established in the industry.

The proposed remedial action will consist of:

1. Preparation of a Community Protection Statement and Performance of all required NYC VCP Citizen Participation activities according to an approved Citizen Participation Plan.
2. Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds.
3. Establishment of Unrestricted Use Track 1 Soil Cleanup Objectives (SCOs).
4. Site mobilization involving Site security setup, equipment mobilization, utility mark outs and marking & staking excavation areas.
5. Excavation and removal of soil/fill exceeding Track 1 SCOs. The entire property will be excavated to the depths of three below grade. A small portion of property will be excavated to the depths of 6 feet below grade.
6. Screening of excavated soil/fill during intrusive work for indications of contamination by visual means, odor, and monitoring with a PID.
7. Removal of underground storage tanks (if encountered) and closure of petroleum spills (if evidence of a spill/leak is encountered during Site excavation) in compliance with applicable local, State and Federal laws and regulations.

8. Transportation and off-Site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal, and this plan. Sampling and analysis of excavated media as required by disposal facilities. Appropriate segregation of excavated media onsite.
9. Collection and analysis of end-point samples to determine the performance of the remedy with respect to attainment of SCOs.
10. Import of materials to be used for backfill and cover in compliance with this plan and in accordance with applicable laws and regulations.
11. As part of development, installation of a vapor barrier system beneath the building slab-on grade as well as behind sub-grade foundation walls of the proposed building.
12. Installation and operation of an active sub-slab depressurization system. After the removal action and installation of the sub slab depressurization system, additional soil vapor samples may be collected to determine if such actions have changed the soil vapor conditions and support passive operation of the SSDS.
13. As part of development, construction and maintenance of an engineered composite cover consisting of 6-inch thick structural concrete slab beneath the building and 2 feet of clean soil material in the landscaped rear yard of the site to prevent human exposure to residual soil/fill remaining under the Site.
14. Implementation of storm-water pollution prevention measures in compliance with applicable laws and regulations.
15. Performance of all activities required for the remedial action, including permitting requirements and pretreatment requirements, in compliance with applicable laws and regulations.
16. Submission of a Remedial Action report (RAR) that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, lists any changes from this RAWP, and describes all Engineering and Institutional Controls to be implemented at the Site.

17. Submission of an approved Site Management Plan (SMP) in the RAR for long-term management of Engineering and Institutional Controls, including plans for operation, maintenance, inspection and certification of Engineering and Institutional Controls and reporting at a specified frequency.
18. Institutional controls will include continued registration with an E-Designation and prohibition of higher level of land usage without OER-approval.

## COMMUNITY PROTECTION STATEMENT

The Office of Environmental Remediation created the New York City Voluntary Cleanup Program (NYC VCP) to provide governmental oversight for the cleanup of contaminated property in NYC. This Remedial Action Work Plan (“cleanup plan”) describes the findings of prior environmental studies that show the location of contamination at the site, and describes the plans to clean up the site to protect public health and the environment.

This cleanup plan provides a very high level of protection for neighboring communities and also includes many other elements that address common community concerns, such as community air monitoring, odor, dust and noise controls, hours of operation, good housekeeping and cleanliness, truck management and routing, and opportunities for community participation. The purpose of this Community Protection Statement is to explain these community protection measures in non-technical language to simplify community review.

**Remedial Investigation and Cleanup Plan.** Under the NYC VCP, a thorough cleanup study of this property (called a remedial investigation) has been performed to identify past property usage, to sample and test soils, groundwater and soil vapor, and identify contaminant sources present on the property. The cleanup plan has been designed to address all contaminant sources that have been identified during the study of this property.

**Identification of Sensitive Land Uses.** Prior to selecting a cleanup, the neighborhood was evaluated to identify sensitive land uses nearby, such as schools, day care facilities, hospitals and residential areas. The cleanup program was then tailored to address the special conditions of this community.

**Qualitative Human Health Exposure Assessment.** An important part of the cleanup planning for the Site is the performance of a study to find all of the ways that people might come in contact with contaminants at the Site now or in the future. This study is called a Qualitative Human Health Exposure Assessment (QHHEA). A QHHEA was performed for this project. This assessment has considered all known contamination at the Site and evaluated the potential for people to come in contact with this contamination. All identified public exposures will be addressed under this cleanup plan.

**Health and Safety Plan.** This cleanup plan includes a Construction Health and Safety Plan (CHASP) that is designed to protect community residents and on-Site workers. The elements of this plan are in compliance with safety requirements of the United States Occupational Safety and Health Administration (OSHA). This plan includes many protective elements including those discussed below.

**Site Safety Coordinator.** This project has a designated Site safety coordinator to implement the Health and Safety Plan. The safety coordinator maintains an emergency contact sheet and protocol for management of emergencies. The Site safety coordinator is Mr. Paul I. Matli and can be reached at 718-636-0800 from 7:00 AM to 5:00 PM.

**Worker Training.** Workers participating in cleanup of contaminated material on this project are required to be trained in a 40-hour hazardous waste operators training course and to take annual refresher training. This pertains to workers performing specific tasks including removing contaminated material and installing cleanup systems in contaminated areas.

**Community Air Monitoring Plan.** Community air monitoring will be performed during this cleanup project to ensure that the community is properly protected from contaminants, dust and odors. Air samples will be tested in accordance with a detailed plan called the Community Air Monitoring Plan or CAMP. Results will be regularly reported to the NYC Office of Environmental Remediation. This cleanup plan also has a plan to address any unforeseen problems that might occur during the cleanup (called a ‘Contingency Plan’).

**Odor, Dust and Noise Control.** This cleanup plan includes actions for odor and dust control. These actions are designed to prevent off-Site odor and dust nuisances and includes steps to be taken if nuisances are detected. Generally, dust is managed by application of physical covers and by water sprays. Odors are controlled by limiting the area of open excavations, physical covers, spray foams and by a series of other actions (called operational measures). The project is also required to comply with NYC noise control standards. If you observe problems in these areas, please contact the onsite Project Manager Mr. Paul I. Matli at 718-636-0800 or NYC OER Project Manager Mr. William H. Wong at 212-341-0659.

**Quality Assurance.** This cleanup plan requires that evidence be provided to illustrate that all cleanup work required under the plan has been completed properly. This evidence will be summarized in the final report, called the Remedial Action Report. This report will be submitted to the NYC OER and will be thoroughly reviewed.

**Storm-Water Management.** To limit the potential for soil erosion and discharge, this cleanup plan has provisions for storm-water management. The main elements of the storm water management include physical barriers such as tarp covers and erosion fencing, and a program for frequent inspection.

**Hours of Operation.** The hours for operation of cleanup will comply with the NYC Department of Buildings construction code requirements or according to specific variances issued by that agency. For this cleanup project, the hours of operation are 7:00 AM to 5:00 PM from Monday to Friday.

**Signage.** While the cleanup is in progress, a placard will be prominently posted at the main entrance of the property with a laminated project Fact Sheet that states that the project is in the NYC VCP, provides project contact names and numbers, and locations of project documents can be viewed.

**Complaint Management.** The contractor performing this cleanup is required to address all complaints. If you have any complaints, you can call the facility Project Manager Mr. Paul I. Matli at 718-636-0800 or [pmatli@hydrotechenvironmental.com](mailto:pmatli@hydrotechenvironmental.com), the NYC Office of Environmental Remediation Project Manager Mr. William H. Wong at 212-341-0659 or [WiWong@dep.nyc.gov](mailto:WiWong@dep.nyc.gov), or call 311 and mention the Site is in the NYC Voluntary Cleanup Program.

**Utility Mark-outs.** To promote safety during excavation in this cleanup, the contractor is required to first identify all utilities and must perform all excavation and construction work in compliance with NYC Department of Buildings regulations.

**Soil and Liquid Disposal.** All soil and liquid material removed from the Site as part of the cleanup will be transported and disposed of in accordance with all applicable City, State and Federal regulations and required permits will be obtained.

**Soil Chemical Testing and Screening.** A trained and properly qualified environmental professional will supervise all excavations. In addition to extensive sampling and chemical testing of soils on the Site, excavated soil will be screened continuously using hand-held instruments, by sight, and by smell to ensure proper material handling and management, and community protection.

**Stockpile Management.** Soil stockpiles will be kept covered with tarps to prevent dust, odors and erosion. Stockpiles will be frequently inspected. Damaged tarp covers will be promptly replaced. Stockpiles will be protected with silt fences. Hay bales will be used, as needed to protect storm water catch basins and other discharge points.

**Trucks and Covers.** Loaded trucks leaving the Site will be covered in compliance with applicable laws and regulations to prevent dust and odor. Trucks will be properly recorded in logs and records and placarded in compliance with applicable City, State and Federal laws, including those of the New York State Department of Transportation. If loads contain wet material that can leak, truck liners will be used. All transport of materials will be performed by licensed truckers and in compliance with all laws and regulations.

**Imported Material.** All fill materials proposed to be brought onto the Site will comply with rules outlined in this cleanup plan and will be inspected and approved by a qualified worker located on-Site. Waste materials will not be brought onto the Site. Trucks entering the Site with imported clean materials will be covered in compliance with applicable laws and regulations.

**Equipment Decontamination.** All equipment used for cleanup work will be inspected and washed, if needed, before it leaves the Site. Trucks will be cleaned at a truck inspection station on the property before leaving the Site.

**Housekeeping.** Locations where trucks enter or leave the Site will be inspected every day and cleaned regularly to ensure that they are free of dirt and other materials from the Site.

**Truck Routing.** Truck routes have been selected to: (a) limit transport through residential areas and past sensitive nearby properties; (b) maximize use of city-mapped truck routes; (c) limit total distance to major highways; (d) promote safety in entry to highways; (e) promote

overall safety in trucking; and (f) minimize off-Site line-ups (queuing) of trucks entering the property. Operators of loaded trucks leaving the Site will be instructed not to stop or idle in the local neighborhood.

**Final Report.** The results of all cleanup work will be fully documented in a final report (called a Remedial Action Report) that will be available for you to review in the public document repositories identified as Queens Public Library - Astoria Branch Library located at 14-01 Astoria Blvd, Astoria, New York.

**Long-Term Site Management.** To provide long-term protection after the cleanup is complete, the property owner will be required to comply with an ongoing Site Management Plan that calls for continued inspection of protective controls, such as vapor management systems. The Site Management Plan is evaluated and approved by the NYC OER. Requirements that the property owner must comply with are defined in the property's deed or established through a city environmental designation. A certification of continued protectiveness of the cleanup will be required from time to time to show that the approved cleanup is still effective.

# **REMEDIAL ACTION WORK PLAN**

## **1.0 SITE BACKGROUND**

Mr. George Mann has enrolled in the New York City Voluntary Cleanup Program (NYC VCP) to investigate and remediate a property located at 11-28 31<sup>st</sup> Drive in the Astoria section in Queens, New York. (the “Site”). A Remedial Investigation (RI) was performed to compile and evaluate data and information necessary to develop this Remedial Action Work Plan (RAWP) in a manner that will render the Site protective of public health and the environment consistent with the contemplated end use. This RAWP establishes remedial action objectives, provides a remedial alternatives analysis that includes consideration of a permanent cleanup, and provides a description of the selected remedial action. The remedial action described in this document provides for the protection of public health and the environment, complies with applicable environmental standards, criteria and guidance and applicable laws and regulations.

### **1.1 SITE LOCATION AND CURRENT USAGE**

The Site is located at 11-28 31<sup>st</sup> Drive in the Astoria section in Queens, New York and is identified as Block 502 and Lot 22 on the New York City Tax Map. **Figure 1** shows the Site location. The Site is 2,416.40-square feet and is bounded by 31<sup>st</sup> Drive to the north-northeast, a vacant land and a 1-story manufacturing building to the south-southwest, a 1-story cabinet manufacturing facility to the east-southeast and a vacant 1-story warehouse to the west-northwest. Currently, the Site is vacant and contains a 1-story building that was until most recently occupied by a manufacturing facility of wood cabinets.

### **1.2 PROPOSED REDEVELOPMENT PLAN**

The proposed future use of the Site will consist of residential use. The Site will be developed into 6-story building with slab on grade, plus stair/elevator and bulkhead. The footprint of the building will be approximately 1,550 square feet. Approximately 62 feet of existing masonry retaining walls on both side of the current building will be maintained and incorporated into the new building. The proposed slab on grade will be 6 inches in thickness. Column footings and grade beam footings will be installed at approximately 2 feet 6 inches below grade surface. An

elevator pit approximately 8 feet 8 inches long and 6 feet 8 inches wide will be located in the east-central portion and the will be 8 and will extend 5 feet 8 inches below grade surface. Below the elevator shaft a 2-feet thick concrete base will be installed. The first floor will consist of a residential apartment and mechanical/janitorial space. Upper second to 5 floors will each consist of two residential apartments. A landscaped rear yard of approximately 850 square feet will exist in the rear southwestern portion of the Site. A layout of the proposed site development is presented in **Figure 2**. The current zoning designation is R6 residential district.

The remedial action contemplated under this RAWP may be implemented independently of the proposed redevelopment plan.

### **1.3 DESCRIPTION OF SURROUNDING PROPERTY**

The Site is located in a residential, commercial and light manufacturing/industrial neighborhood. 31<sup>st</sup> Drive is located to the north-northeast of the Site. A vacant land and a 1-story manufacturing building bound the Site to the south-southwest, a 1-story cabinet manufacturing facility bounds the Site to the east-southeast and a vacant 1-story warehouse bounds the Site to west-northwest.

Within 500 feet radius of the Site, there are a variety of land uses including: residential (multi-story residential apartments), commercial, industrial and institutions. Properties located within 1/4-mile radius of the Site are zoned R6, R5B, R7A, R7X, (general residential districts), and C1-2, C1-2, C2-1 (general commercial district). Within 250 feet radius of the Site, no sensitive receptor is identified. The land uses include residential homes, commercial uses, industrial uses, parking lot, vacant lots and a public park (Socrates Sculpture Park). **Figure 3** shows the surrounding land usage.

### **1.4 REMEDIAL INVESTIGATION**

A remedial investigation was performed and the results are documented in a companion document called “*Remedial Investigation Report, 11-28 31<sup>st</sup> Drive*”, dated May 2013 (RIR).

## **Summary of Past Uses of Site and Areas of Concern**

Based upon the review of the Fire Insurance Maps and Regulatory Agency documents from the Phase I Environmental Site Assessment (ESA) Report prepared by Hydro Tech in March 2013, a Site history was established. The Site was utilized as an auto repair shop between 1934 and 1936, a machine shop between 1945 and 1970 and commercial facility between 1977 and 2006. Until most recently, the site was utilized as a manufacturing facility of wood cabinets and then became vacant during the last quarter of 2012.

The AOCs identified for this Site include:

1. Presence of E-designation for Hazardous Materials/Air Quality (**E-245**) at the site;
2. Historic automotive repairs and industrial uses at the site;
3. Presence of suspected historical USTs;
4. Presence of a dry pit and a floor drain.

## **Summary of the Work Performed under the Remedial Investigation**

1. Conducted a Site inspection to identify AOCs and physical obstructions (i.e. structures, buildings, etc.);
2. Performed a Ground Penetrating Radar (GPR) survey throughout the 50 percent of the Site;
3. Installed three (3) soil borings across the entire project Site, and collected seven (7) soil samples including one (1) duplicate sample for chemical analysis from the soil borings to evaluate soil quality;
4. Installed three (3) groundwater monitoring wells throughout the Site to establish groundwater flow and collected four (4) groundwater samples including one (1) duplicate sample for chemical analysis to evaluate groundwater quality;
5. Installed three (3) sub-slab vapor probes around Site perimeter and collected three (3) samples for chemical analysis.

## Summary of Environmental Findings

1. Elevation of the property is approximately 11 feet.
2. Depth to groundwater ranges from 8.47 to 10.03 feet at the Site.
3. Groundwater flow is generally from south to north beneath the Site.
4. Depth to bedrock is in excess of 40 number feet at the Site.
5. The stratigraphy of the site, from the surface down, consists of historic fill (sand with traces of pebbles, silt, and ash) at variable depths ranging in thickness from zero to 5 feet. The fill layer is underlain by clayey sand to variable depths ranging from 2 to 10 feet. This layer is underlain by granular soils to 40 feet.
6. Soil samples collected during the RI indicated that Pesticides and PCBs were not detected in any of the soil samples. Trace concentrations VOCs including acetone, methylene chloride and PCE (3.9 ppb) was detected in 1 of 3 shallow soil samples at the Site. No other VOCs were detected in any soil samples and no VOCs exceeded Track 1 SCOs. Trace levels of several SVOC's were detected in shallow soil samples (maximum total SVOCs of 6.33 ppm). No SVOC compounds exceeded Unrestricted Use SCOs. Metals including copper (maximum of 54.6 mg/kg), lead (maximum of 191 mg/kg), zinc (maximum of 111 mg/kg), chromium trivalent (maximum of 37.2 mg/kg) and chromium Hexavalent (maximum of 1.47 mg/kg) were detected in shallow soil samples at concentrations that exceeded the Track 1 Unrestricted SCOs. No metals exceeded Restricted Residential SCOs. Metal concentrations in deeper soils were all below Track 1 Unrestricted Use SCOs. Findings of the RI were unremarkable and did not show an onsite contaminant source. Data collected during the RI is sufficient to delineate the vertical and horizontal distribution of contaminants in soil/fill at the Site.
7. Groundwater samples collected during the RI showed four chlorinated VOC, including PCE (maximum of 83 ug/l) and chloroform (maximum of 4.7 ug/l), acetone (4 ug/l) and methylene chloride (4 ug/l) in 1 of 3 monitoring wells installed at the Site. Only PCE concentrations exceeded 6NYCRR Part 703.5 Class GA Groundwater Quality Standards (GQS). One SVOC, Di-n-butyl phthalate, which is a common laboratory contaminant, was detected in one sample at a concentration (11.2 ppb), below its GQS. No pesticides

or PCBs were detected in groundwater samples. Two dissolved metals, Sodium and magnesium were detected in groundwater above their GQS.

8. Soil vapor samples collected during the RI showed a wide range of compounds throughout the property including BTEX and associated derivative compounds and chlorinated hydrocarbons. BTEX were found in all soil vapor samples and included a wide number of compounds. These compounds were not identified in soil or groundwater on the property. PCE was detected in all vapor samples at concentrations of 140 ug/m<sup>3</sup>, 1,400 ug/m<sup>3</sup> and 1,600 ug/m<sup>3</sup>. TCE was detected in 2 of 3 vapor samples at a concentration of 9.5 ug/m<sup>3</sup> and 15 ug/m<sup>3</sup>. TCA and carbon tetrachloride was not detected in any sample. Other chlorinated hydrocarbon compounds included chloroform (18 ug/m<sup>3</sup>), methylene chloride (maximum 29 ug/m<sup>3</sup>) and acetone (maximum 900 ug/m<sup>3</sup>). PCE (NYSDOH AGV of 100 µg/m<sup>3</sup>) and TCE (AGV of 5 µg/m<sup>3</sup>) concentrations detected in soil vapor at the site are above the NYSDOH guidance matrix.

For more detailed results, consult the RIR. Based on an evaluation of the data and information from the RIR and this RAWP, disposal of significant amounts of hazardous waste is not suspected at this site.

## **2.0 REMEDIAL ACTION OBJECTIVES**

Based on the results of the RI, the following Remedial Action Objectives (RAOs) have been identified for this Site:

### **Groundwater**

- Prevent direct exposure to contaminated groundwater.
- Prevent exposure to contaminants volatilizing from contaminated groundwater.

### **Soil**

- Prevent direct contact with contaminated soil.
- Prevent migration of contaminants that would result in groundwater or surface water contamination.

### **Soil Vapor**

- Prevent exposure to contaminants in soil vapor.
- Prevent migration of soil vapor into dwelling and other occupied structures.

### **3.0 REMEDIAL ALTERNATIVES ANALYSIS**

The goal of the remedy selection process is to select a remedy that is protective of human health and the environment taking into consideration the current, intended and reasonably anticipated future use of the property. The remedy selection process begins by establishing remedial action objectives (RAOs) for media in which chemical constituents were found in exceedance of applicable standards, criteria and guidance values (SCGs). A remedy is then developed based on the following ten criteria:

- Protection of human health and the environment;
- Compliance with SCGs;
- Short-term effectiveness and impacts;
- Long-term effectiveness and permanence;
- Reduction of toxicity, mobility, or volume of contaminated material;
- Implementability;
- Cost effectiveness;
- Community Acceptance;
- Land use; and
- Sustainability.

The following is a detailed description of the alternatives analysis and remedy selection to address impacted media at the Site. As required, a minimum of two remedial alternatives (including a Track 1 scenario) are evaluated, as follows:

Alternative 1 involves:

- Establishment of Unrestricted Use Track 1 SCOs for the Site.
- Removal of all soil/ fill exceeding Unrestricted Use (Track 1) Soil Cleanup Objective (SCOs) throughout the Site. This alternative would require excavation to a depth of approximately 3 feet throughout the property to remove all historic fill and confirmation that Track 1 SCOs have been achieved through post-excavation end point sampling. If soil/fill containing analytes at concentrations above Unrestricted Use SCOs is still present at the base of the excavation after

removal of all soil required for construction of the new building's cellar level is complete, additional excavation will be performed to ensure complete removal of soil that does not meet Track 1 Unrestricted Use SCOs; and

- Based on the level of soil vapor, an active SSDS is required as an Engineering Control and a Track 1 Remedial Action cannot be achieved prior to the removal action. A vapor barrier would also be required. Such remedial action would be a Track 2 Remedial Action and would require Site Management for the active SSDS Engineering Control and continued registration with an E-Designation.

Alternative 2 involves:

- Establishment of site-specific Track 4 SCOs for the Site;
- Removal of all soil/ fill exceeding Track 4 Site-Specific SCOs. For development purposes, the site would be excavated to a depth of approximately 3 to 6 feet throughout the property to remove all historic fill and confirmation that the site-specific Track 4 SCOs have been achieved through post-excavation end point sampling;
- Placement of a final cover over the entire site to eliminate exposure to remaining soil/fill;
- Placement of a vapor barrier beneath the building slab-on grade and along below grade foundation side walls to prevent any potential future exposures from off-Site soil vapor;
- Installation of an active sub-slab depressurization system beneath the foundation slab to prevent soil vapor entering the new building;
- Establishment of use restrictions including prohibitions on the use of groundwater from the site and prohibitions on sensitive site uses, such as farming or vegetable gardening, to eliminate future exposure pathways; and prohibition of a higher level of land use without OER approval;
- Establishment of an approved Site Management Plan to ensure long-term management of these engineering and institutional controls including the performance of periodic inspections and certification that the controls are

performing as they were intended. SMP will note that the property owner and property owner's successors and assigns must comply with the approved SMP; and

- The property will continue to be registered with an E-Designation.

### **3.1 THRESHOLD CRITERIA**

#### **Protection of Public Health and the Environment**

This criterion is an evaluation of the remedy's ability to protect public health and the environment, and an assessment of how risks posed through each existing or potential pathway of exposure are eliminated, reduced or controlled through removal, treatment, and implementation of Engineering Controls or Institutional Controls. Protection of public health and the environment must be achieved for all approved remedial actions.

**Alternative 1** would be protective of human health and the environment by removing the historic fill at the Site, thus eliminating potential for direct contact with contaminated soil/ fill once construction is complete and eliminating the risk of contamination leaching into groundwater.

**Alternative 2** would achieve comparable protections of human health and the environment since all impacted soil/fill will be removed for purposes of construction and by ensuring that remaining soil/ fill on-Site meets Track 4 Site-Specific SCOs as well as by placement of institutional and engineering controls, including a composite cover system, vapor barrier and an active SSDS system. The composite cover system would prevent direct contact with any remaining on-Site soil/fill. Implementing institutional controls including a site management plan would ensure that the composite cover system remains intact and protective. Establishment of Track 4 Site-Specific SCOs would minimize the risk of contamination leaching into groundwater. SSDS system would protect new building from vapor intrusion.

For both Alternatives, potential exposure to contaminated soils or groundwater during construction would be minimized by implementing a Construction Health and Safety Plan, an approved Soil and Materials Management Plan and Community Air Monitoring Plan (CAMP) would minimize potential exposure to contaminated soils during construction. Potential contact with contaminated groundwater would be prevented as City laws and regulations prohibit its use,

and it is not anticipated to be encountered during construction. Potential future migration of off-Site soil vapors into the new building would be prevented by installing a vapor barrier below the new building's basement slab and continuing the vapor barrier around below grade foundation walls, as well as by installing an active SSDS.

### **3.2. BALANCING CRITERIA**

#### **Compliance with Standards, Criteria and Guidance (SCGs)**

This evaluation criterion assesses the ability of the alternative to achieve applicable standards, criteria and guidance.

Alternative 1 would achieve compliance with the remedial goals, SCGs and RAOs for soil through removal to Track 1 Unrestricted Use SCOs and groundwater protection standards. Compliance with SCGs for soil vapor would also be achieved by installation of vapor barrier and active sub-slab depressurization system below the new building's basement slab. However, a Track 1 Remedial Action would not be achieved, pending completion of the removal action and additional sampling of the SSDS.

Alternative 2 would achieve compliance with the remedial goals, SCGs and RAOs for soil through removal to meet Track 4 Site Specific SCOs. Compliance with SCGs for soil vapor would also be achieved by installation of vapor barrier and active sub-slab depressurization system. A Site Management Plan would ensure that these controls remained protective for the long term.

Health and safety measures contained in the CHASP and Community Air Monitoring Plan (CAMP) that comply with the applicable SCGs would be implemented during Site redevelopment under this RAWP. For both Alternatives, focused attention on means and methods employed during the remedial action would ensure that handling and management of contaminated material would be in compliance with applicable SCGs. These measures will protect on-site workers and the surrounding community from exposure to any Site-related concerns.

## **Short-term effectiveness and impacts**

This evaluation criterion assesses the effects of the alternative during the construction and implementation phase until remedial action objectives are met. Under this criterion, alternatives are evaluated with respect to their effects on public health and the environment during implementation of the remedial action, including protection of the community, environmental impacts, time until remedial response objectives are achieved, and protection of workers during remedial actions.

Both Alternatives 1 and 2 have similar-short term effectiveness during their respective implementations, as each requires excavation of historic fill material. Both alternatives would result in short-term dust generation impacts associated with excavation, handling, load out of materials, and truck traffic. Short-term impacts would potentially be higher for Alternative 1 if excavation of greater amounts of historical fill material is encountered below the excavation depth of the proposed building. However, focused attention to means and methods during the remedial action during a Track 1 removal action, including community air monitoring and appropriate truck routing, would minimize or negate the overall impact of these activities and any differences between these alternatives.

An additional short-term adverse impact and risks to the community associated with both remedial alternatives is increased truck traffic. Approximately 20, 20-ton capacity truck trips would be necessary to transport fill and soil excavated during Site development. Truck traffic will be routed on the most direct course using major thoroughfares where possible and flaggers will be used to protect pedestrians at Site entrances and exits.

Both alternatives would employ appropriate measures to prevent short term impacts, including a Construction Health and Safety Plan, a Community Air Monitoring Plan (CAMP) and a Soil/Materials Management Plan (SMMP), during all on-Site soil disturbance activities and would minimize the release of contaminants into the environment. Both alternatives provide short term effectiveness in protecting the surrounding community by decreasing the risk of contact with on-Site contaminants. Construction workers operating under appropriate management procedures and a Health and Safety Plan (CHASP) will be protected from on-Site contaminants (personal protective equipment would be worn consistent with the documented risks within the respective work zones).

### **Long-term effectiveness and permanence**

This evaluation criterion addresses the results of a remedial action in terms of its permanence and quantity/nature of waste or residual contamination remaining at the Site after response objectives have been met, such as permanence of the remedial alternative, magnitude of remaining contamination, adequacy of controls including the adequacy and suitability of ECs/ICs that may be used to manage contaminant residuals that remain at the Site and assessment of containment systems and ICs that are designed to eliminate exposures to contaminants, and long-term reliability of Engineering Controls.

Alternative 1 would achieve long-term effectiveness and permanence by permanently removing all impacted soil/ fill material and enabling unrestricted usage of the property. The vapor barrier and active SSDS employed and would be considered to be permanent controls for future off-site soil vapor management pending future vapor sampling.

Alternative 2 would provide long-term effectiveness by removing most on-site contamination and attaining Track 4 Site-Specific SCOs, establishing Engineering Controls including a composite cover system across the Site, a vapor barrier and an active SSDS, establishing Institutional Controls to ensure long-term management including use restrictions, a Site Management Plan, and continued registration as an E-designated property to memorialize these controls for the long term. The SMP would ensure long-term effectiveness of all ECs and ICs by requiring periodic inspection and certification that these controls and use restrictions continue to be in place and are functioning as they were intended assuring that protections designed into the remedy will provide continued high level of protection in perpetuity.

### **Reduction of toxicity, mobility, or volume of contaminated material**

This evaluation criterion assesses the remedial alternative's use of remedial technologies that permanently and significantly reduce toxicity, mobility, or volume of contaminants as their principal element. The following is the hierarchy of source removal and control measures that are to be used to remediate a Site, ranked from most preferable to least preferable: removal and/or treatment, containment, elimination of exposure and treatment of source at the point of

exposure. It is preferred to use treatment or removal to eliminate contaminants at a Site, reduce the total mass of toxic contaminants, cause irreversible reduction in contaminants mobility, or reduce of total volume of contaminated media.

Alternative 1 would achieve the greatest measure of long-term effectiveness and permanence related to on-Site contamination by permanently removing all impacted soil/fill above Track 1 Unrestricted Use SCOs. Removal of on-Site contaminant sources will prevent future groundwater contamination. However, a Track 1 Remedial Action would not be achieved because the active SSDS Engineering Control would be required, pending completion of the removal action and additional sampling of the SSDS.

Alternative 2 would provide long-term effectiveness by permanently removing most on-Site contamination and attaining Track 4 Site-Specific SCOs; a composite cover system across the Site, maintaining use restrictions, establishing an SMP to ensure long-term management of Institutional Controls (ICs), Engineering Controls (ECs), and maintaining continued registration as an E-designated property to memorialize these controls for the long term. The SMP would ensure long-term effectiveness of all ECs and ICs by requiring periodic inspection and certification that these controls and restrictions continue to be in place and are functioning as they were intended assuring that protections designed into the remedy will provide continued high level of protection in perpetuity. Alternative 1 would eliminate a greater total mass of contaminants form soil on Site.

Both alternatives would result in removal of soil contamination exceeding the SCOs providing the highest level, most effective and permanent remedy over the long-term with respect to a remedy for contaminated soil, which will eliminate or minimize any migration to groundwater. Potential sources of soil vapor and groundwater contamination will also be eliminated or minimized as part of the remedy.

### **Implementability**

This evaluation criterion addresses the technical and administrative feasibility of implementing an alternative and the availability of various services and materials required during its implementation, including technical feasibility of construction and operation, reliability of the

selected technology, ease of undertaking remedial action, monitoring considerations, administrative feasibility (e.g. obtaining permits for remedial activities), and availability of services and materials.

The techniques, materials and equipment to implement both remedial Alternatives 1 and 2 are readily available and have been proven effective in remediating the contaminants associated with the Site. They use standard materials and services that are well established technology. The reliability of each remedy is also high. There are no special difficulties associated with any of the activities proposed.

### **Cost effectiveness**

This evaluation criterion addresses the cost of alternatives, including capital costs (such as construction costs, equipment costs, and disposal costs, engineering expenses) and site management costs (costs incurred after remedial construction is complete) necessary to ensure the continued effectiveness of a remedial action.

The costs associated with both Alternative 1 and Alternative 2 would likely be the comparable. Costs associated with Alternative 1 could potentially be higher than Alternative 2 if soil with analytes above Unrestricted Use SCOs is encountered below the excavation depth required for development. Additional costs would include disposal of additional soil, and import of clean soil for backfill. However, long-term costs for Alternative 2 are likely higher than Alternative 1 based on implementation of a Site Management Plan.

### **Community Acceptance**

This evaluation criterion addresses community opinion and support for the remedial action. Observations here will be supplemented by public comment received on the RAWP.

Based on the overall goals of the remedial program and the intended Site use, it is anticipated that Alternatives 1 and 2 for the Site would be acceptable to the community. This RAWP will be subject to public review under the NYC VCP and will provide the opportunity for detailed public input on the remedial alternatives and the selected remedial action. This public comment will be considered by OER prior to approval of this plan. The Citizen Participation Plan for the project is provided in **Appendix I**. Observations here will be supplemented by public comment received on the RAWP.

## **Land use**

This evaluation criterion addresses the proposed use of the property. This evaluation has considered reasonably anticipated future uses of the Site and takes into account: current use and historical and/or recent development patterns; applicable zoning laws and maps; NYS Department of State's Brownfield Opportunity Areas (BOA) pursuant to section 970-r of the general municipal law; applicable land use plans; proximity to real property currently used for residential use, and to commercial, industrial, agricultural, and/or recreational areas; environmental justice impacts, Federal or State land use designations; population growth patterns and projections; accessibility to existing infrastructure; proximity of the site to important cultural resources and natural resources, potential vulnerability of groundwater to contamination that might emanate from the site, proximity to flood plains, geography and geology; and current Institutional Controls applicable to the site.

The proposed redevelopment of the Site is compatible with its current R6 zoning designation and is consistent with recent development patterns. Following remediation, the Site will meet either Track 1 Unrestricted Use or Track 4 Site-Specific SCOs, both of which are appropriate for its planned residential use. Improvements in the current environmental condition of the property achieved by both alternatives are also consistent with the City's goals for cleanup of contaminated land and bringing such properties into productive reuse. Both alternatives are equally protective of natural resources and cultural resources.

## **Sustainability of the Remedial Action**

This criterion evaluates the overall sustainability of the remedial action alternatives and the degree to which sustainable means are employed to implement the remedial action including those that take into consideration NYC's sustainability goals defined in *PlaNYC: A Greener, Greater New York*. Sustainability goals may include: maximizing the recycling and reuse of non-virgin materials; reducing the consumption of virgin and non-renewable resources;

minimizing energy consumption and greenhouse gas emissions; improving energy efficiency; and promotion of the use of native vegetation and enhancing biodiversity during landscaping associated with Site development.

While Alternative 2 would potentially result in lower energy usage based on reducing the volume of material transported off-Site, both remedial alternatives are comparable with respect to the opportunity to achieve sustainable remedial action. The remedial plan would take into consideration the shortest trucking routes during off-Site disposal of historic fill and other soils, which would reduce greenhouse gas emissions and conserve energy used to fuel trucks. New York City Clean Soil Bank program may be utilized for reuse of native soils if soil quality can be demonstrated. To the extent practicable, energy efficient building materials, appliances, and equipment will be utilized to complete the development. A complete list of green remedial activities considered as part of the NYC VCP is included in the Sustainability Statement, included as Appendix C.

## **4.0 REMEDIAL ACTION**

### **4.1 SUMMARY OF PREFERRED REMEDIAL ACTION**

The preferred remedial action alternative is Alternative Track 1 Alternative. The preferred remedial action alternative achieves protection of public health and the environment for the intended use of the property. The preferred remedial action alternative will achieve all of the remedial action objectives established for the project and addresses applicable SCGs. The preferred remedial action alternative is effective in both the short-term and long-term and reduces mobility, toxicity and volume of contaminants. The preferred remedial action alternative is cost effective and implementable and uses standards methods that are well established in the industry.

The proposed remedial action will consist of:

1. Preparation of a Community Protection Statement and Performance of all required NYC VCP Citizen Participation activities according to an approved Citizen Participation Plan.
2. Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds.
3. Establishment of Unrestricted Use Track 1 Soil Cleanup Objectives (SCOs).
4. Site mobilization involving Site security setup, equipment mobilization, utility mark outs and marking & staking excavation areas.
5. Excavation and removal of soil/fill exceeding Track 1 SCOs. The entire property will be excavated to the depths of three below grade. A small portion of property will be excavated to the depths of 6 feet below grade.
6. Screening of excavated soil/fill during intrusive work for indications of contamination by visual means, odor, and monitoring with a PID.
7. Removal of underground storage tanks (if encountered) and closure of petroleum spills (if evidence of a spill/leak is encountered during Site excavation) in compliance with applicable local, State and Federal laws and regulations.

8. Transportation and off-Site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal, and this plan. Sampling and analysis of excavated media as required by disposal facilities. Appropriate segregation of excavated media onsite.
9. Collection and analysis of end-point samples to determine the performance of the remedy with respect to attainment of SCOs.
10. Import of materials to be used for backfill and cover in compliance with this plan and in accordance with applicable laws and regulations.
11. As part of development, installation of a vapor barrier system beneath the building slab-on grade as well as behind sub-grade foundation walls of the proposed building.
12. Installation and operation of an active sub-slab depressurization system. After the removal action and installation of the sub slab depressurization system, additional soil vapor samples may be collected to determine if such actions have changed the soil vapor conditions and support passive operation of the SSDS.
13. As part of development, construction and maintenance of an engineered composite cover consisting of 6-inch thick structural concrete slab beneath the building and 2 feet of clean soil material in the landscaped rear yard of the site to prevent human exposure to residual soil/fill remaining under the Site.
14. Implementation of storm-water pollution prevention measures in compliance with applicable laws and regulations.
15. Performance of all activities required for the remedial action, including permitting requirements and pretreatment requirements, in compliance with applicable laws and regulations.
16. Submission of a Remedial Action report (RAR) that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, lists any changes from this RAWP, and describes all Engineering and Institutional Controls to be implemented at the Site.

- 17. Submission of an approved Site Management Plan (SMP) in the RAR for long-term management of Engineering and Institutional Controls, including plans for operation, maintenance, inspection and certification of Engineering and Institutional Controls and reporting at a specified frequency.
- 18. Institutional Controls will include continued registration with an E-Designation and prohibition of higher level of land usage without OER-approval.

**4.2 SOIL CLEANUP OBJECTIVES AND SOIL/FILL MANAGEMENT**

Track 1 Soil Cleanup Objectives (SCOs) are proposed for this project. If Track 1 is not achieved, the following Track 4 Site-Specific SCOs will be used:

<u>Contaminant</u>	<u>Track 4 SCOs</u>
Copper	270 ppm
Lead	1,000 ppm
Chromium total	40 ppm

Soil and materials management on-Site and off-Site, including excavation, handling and disposal, will be conducted in accordance with the Soil/Materials Management Plan in **Appendix 3**. The location of planned excavations is shown in **Figure 4**.

Discrete contaminant sources (such as hotspots) identified during the remedial action will be identified by GPS or surveyed. This information will be provided in the Remedial Action Report.

**Estimated Soil/Fill Removal Quantities**

The total quantity of soil/fill expected to be excavated and disposed off-Site is 350 tons.

Disposal location(s) will be reported promptly to the OER Project Manager prior to the start of the remedial action.

**End-Point Sampling**

Removal actions for development purposes under this plan will be performed in conjunction with confirmation soil sampling. Three confirmation samples will be collected from the base of the excavation at locations to be determined by OER. For comparison to Track 1 SCOs, analytes

will include VOCs, SVOC, pesticides, PCBs and metals according to analytical methods described below. For comparison to Track 4 SCOs, analytes will only include trigger compounds and elements established on the Track 4 SCO list.

Hot-spot removal actions, whether established under this RAWP or identified during the remedial program, will be performed in conjunction with post remedial end-point samples to ensure that hot spots are fully removed. Analytes for end-point sampling will be those parameters that are driving the hot-spot removal action and will be approved by OER.

End-point sampling frequency will consist of the following:

1. For excavations less than 20 feet in total perimeter, at least one bottom sample and one sidewall sample biased in the direction of surface runoff.
2. For excavations 20 to 300 feet in perimeter:
  - For surface removals, one sample from the top of each sidewall for every 30 linear feet of sidewall and one sample from the excavation bottom for every 900 square feet of bottom area.
  - For subsurface removals, one sample from each sidewall for every 30 linear feet of sidewall and one sample from the excavation bottom for every 900 square feet of bottom area.
3. For sampling of volatile organics, bottom samples should be taken within 24 hours of excavation, and should be taken from the zero to six-inch interval at the excavation floor. Samples taken after 24 hours should be taken at six to twelve inches.
4. For contaminated soil removal, post remediation soil samples for laboratory analysis should be taken immediately after contaminated soil removal. If the excavation is enlarged horizontally, additional soil samples will be taken pursuant to bullets 1-3 above.

Post-remediation end-point sample locations and depth will be biased towards the areas and depths of highest contamination identified during previous sampling episodes unless field indicators such as field instrument measurements or visual contamination identified during the

remedial action indicate that other locations and depths may be more heavily contaminated. In all cases, post-remediation samples should be biased toward locations and depths of the highest expected contamination.

New York State ELAP certified labs will be used for all confirmation and end-point sample analyses. Labs performing confirmation and end-point sample analyses will be reported in the RAR. The RAR will provide a tabular and map summary of all confirmation and end-point sample results and will include all data including non-detects and applicable standards and/or guidance values. End-point samples will be Confirmation samples will be analyzed for compounds and elements as described above utilizing the following methodology:

Soil analytical methods will include:

- Volatile organic compounds by EPA Method 8260;
- Semi-volatile organic compounds by EPA Method 8270;
- Target Analyte List metals; and
- Pesticides/PCBs by EPA Method 8081/8082.

If either LNAPL and/or DNAPL are detected, appropriate samples will be collected for characterization and “finger print analysis” and required regulatory reporting (i.e. spills hotline) will be performed.

### **Quality Assurance/Quality Control**

The fundamental QA objective with respect to accuracy, precision, and sensitivity of analysis for laboratory analytical data is to achieve the QC acceptance of the analytical protocol. The laboratory will address the accuracy, precision and completeness requirements for all data generated.

Collected samples will be appropriately packaged, placed in coolers and shipped via overnight courier or delivered directly to the analytical laboratory by field personnel. Samples will be containerized in appropriate laboratory provided glassware and shipped in plastic coolers. Samples will be preserved through the use of ice or “cold-packs” to maintain a temperature of 4°C.

Dedicated disposable sampling materials will be used for the collection endpoint samples, eliminating the need to prepare field equipment (rinsate) blanks. However, if non-disposable equipment is used, (stainless steel scoop, etc.) field rinsate blanks will be prepared at the rate of 1 for every eight samples collected. Decontamination of non-dedicated sampling equipment will consist of the following:

Field QA/QC will include the following procedures:

- Calibration of field equipment, including PID, on a daily basis;
- Analysis of field blanks and trip blanks
- Analysis of one (1) duplicate sample;
- Use of dedicated and/or disposable field sampling equipment;
- Proper sample handling and preservation;
- Proper sample chain of custody documentation; and
- Completion of report logs.

The above procedures will be executed as follows:

- One field blank for soil will be generated for each sampling event and will be analyzed for the same set of analytical parameters as the soil samples.
- One (1) duplicate end-point soil sample will be collected to evaluate field sampling precision or reproducibility of measurements of the same parameter under the given set of conditions;
- Disposable sampling equipment will be used to minimize cross-contamination between samples;
- For each of the parameters analyzed, a sufficient sample volume will be collected to adhere to the specific analytical protocol, and provide sufficient sample for reanalysis if necessary;

- Because plasticizers and other organic compounds inherent in plastic containers may contaminate samples requiring organic analysis, samples will be collected in glass containers;
- Appropriate sample preservation techniques, including cold temperature storage at 4° C, will be utilized to ensure that the analytical parameters concentrations do not change between the time of sample collection and analysis; and
- Samples will be analyzed prior to the expiration of the respective holding time for each analytical parameter to ensure the integrity of the analytical results.

### **Import and Reuse of Soils**

Import of soils onto the property and reuse of soils already onsite will be performed in conformance with the Soil/Materials Management Plan in **Appendix 3**. The estimated quantity of soil to be imported into the Site for backfill and cover soil is 130 tons. The estimated quantity of onsite soil/fill expected to be reused/relocated on Site is 50 tons.

### **4.3 ENGINEERING CONTROLS**

The excavation required for the proposed Site development will achieve Track 1 Unrestricted Use SCOs. No Engineering Controls are required to address residual soil contamination at the Site (Track 1 cleanup). However, the following Engineering Controls will be required to provide soil vapor management: vapor barrier system and active SSDS. These controls are being built to provide protections against soil vapor from beneath the property and surrounding properties. These two elements will constitute Engineering Controls that will be employed in the remedial action at the Site.

#### **Composite Cover System**

As part of development, an engineered, composite cover system will be built on the Site. The entire property will be covered by an engineered permanent cover system comprised of:

- Structural 6-inch slab beneath the building footprint; and
- Approximately 3 feet of clean backfill landscaping material in the rear yard area.

Figure 1, Figure 2 and Figure 3 of the Appendix shows the location of each cover type built at the Site and the typical design for each remedial cover type used on this Site. If Track 1 SCO's are not achieved at the Site, the composite cover system will be a permanent Engineering Control. The system will be inspected and reported at specified intervals as required by this RAWP and the SMP. The system will be inspected and reported at specified intervals as required by this RAWP and the SMP. A Soil Management Plan will be included in the Site Management Plan and will outline the procedures to be followed in the event that the composite cover system and underlying residual soil/fill is disturbed after the remedial action is complete. Maintenance of this composite cover system will be described in the Site Management Plan in the RAR.

○ **Vapor Barrier**

As part of development, future migration of soil vapor from beneath the site and from off-site will be mitigated with a combination of building slab and vapor barrier. A vapor barrier system consisting of a 60-mil geomembrane will be installed beneath the building slab-on grade according to manufacturer specifications.

The vapor barrier will be installed prior to pouring the building's concrete slab. The vapor barrier will extend throughout the area occupied by the footprint of the new building and up the foundation sidewalls below grade in accordance with manufacturer specifications. The specifications for installation will be provided to the construction management company and the foundation contractor or installer of the liner. The specifications state that all vapor barrier seams, penetrations, and repairs will be sealed either by the tape method or weld method, according to the manufacturer's recommendations and instructions.

The Remedial Action Report will include photographs (maximum of two photos per page) of the installation process, PE/RA certified letter (on company letterhead) from primary contractor responsible for installation oversight and field inspections, and a copy of the manufacturer's certificate of warranty.

A Vapor Barrier Specifications is attached as an **Appendix 4**.

○ **Active Sub-Slab Depressurization System**

Future migration of off-site soil vapor will be mitigated with the construction of an active sub-slab depressurization system. The SSDS will prevent soil gas from accumulating in the building by creating a negative pressure zone beneath the slab. To create this negative pressure zone, a 3-inch aggregate layer consisting of ASTM Class 5 aggregate will be placed beneath the building slab, and sub-slab pits connected 4-inch PVC pipes and routed to the roof via a 4-inch schedule 40 PVC line.

The project's Professional Engineer licensed by the State of New York will have primary direct responsibility for overseeing the implementation of the vapor barrier. The active Depressurization System Specifications Design is attached as an Appendix 4.

○ **4.4 Institutional Controls**

Institutional Controls (ICs) will be utilized in this remedial action to manage soil vapors. ICs are listed below. Long-term employment of EC/ICs will be implemented under a site-specific Site Management Plan (SMP) that will be included in the RAR.

Institutional Controls for this remedial action are:

- The property will continue to be registered with an E-Designation by the NYC Buildings Department.
- Submittal of a Site Management Plan in the RAR for approval by OER that provides procedures for appropriate operation, maintenance, inspection, and certification of ECs and ICs. SMP will require that the property owner and property owner's successors and assigns will submit to OER a periodic written statement that certifies that: (1) controls employed at the Site are unchanged from the previous certification or that any changes to the controls were approved by OER; and, (2) nothing has occurred that impairs the ability of the controls to protect public health and environment or that constitute a violation or failure to comply with the SMP. OER retains the right to enter the Site in order to evaluate the continued maintenance of any controls. This certification shall be submitted at a frequency to be determine by OER in the SMP and will comply with RCNY §43-1407(1)(3).

- The Site will be used for restricted residential use and will not be used for a higher level of use without prior approval by OER.

#### **4.5 SITE MANAGEMENT PLAN**

Site Management is the last phase of remediation and begins with the approval of the Remedial Action Report and issuance of the Notice of Completion (NOC) for the Remedial Action. The Site Management Plan (SMP) describes appropriate methods and procedures to ensure implementation of all ECs and ICs that are required by this RAWP. The Site Management Plan is submitted as part of the RAR but will be written in a manner that allows its use as an independent document. Site Management continues until terminated in writing by OER. The property owner is responsible to ensure that all site management responsibilities defined in the Site Management Plan are implemented.

The SMP will provide a detailed description of the procedures required to manage residual soil/fill left in place following completion of the remedial action in accordance with the Voluntary Cleanup Agreement with OER. This includes a plan for: (1) implementation of EC's and ICs; (2) operation and maintenance of EC's; and (3) inspection and certification of EC's.

Site management activities, reporting, and EC/IC certification will be scheduled by OER on a periodic basis to be established in the SMP and will be subject to review and modification by OER. The Site Management Plan will be based on a calendar year and certification reports will be due for submission to OER by July 31 of the year following the reporting period.

#### **4.6 QUALITATIVE HUMAN HEALTH EXPOSURE ASSESSMENT**

The objective of the qualitative exposure assessment is to identify potential receptors and pathways for human exposure to the contaminants of concern (COC) that are present at, or migrating from, the Site. The identification of exposure pathways describes the route that the COC takes to travel from the source to the receptor. An identified pathway indicates that the potential for exposure exists; it does not imply that exposures actually occur.

Investigations reported in the Remedial Investigation Report (RIR) are sufficient to complete a Qualitative Human Health Exposure Assessment (QHHEA). As part of the VCP process, a QHHEA was performed to determine whether the Site poses an existing or future health hazard

to the Site's exposed or potentially exposed population. The sampling data from the RI were evaluated to determine whether there is any health risk by characterizing the exposure setting, identifying exposure pathways, and evaluating contaminant fate and transport. This QHHEA was prepared in accordance with Appendix 3B and Section 3.3 (b) 8 of the NYSDEC Draft DER-10 Technical Guidance for Site Investigation and Remediation.

### **Known and Potential Sources**

Historic fill material is present at the Site at variable depths ranging in thickness from zero to 3-5 feet. Based on the results of the RIR, the contaminants of concern found are:

#### Soil

- No metals, VOCs, SVOCs, PCBs or pesticides exceeded Track 2 Restricted Residential SCOs in soil;

#### Groundwater

- Two VOCs PCE and chloroform exceeding GQS.
- Dissolved metals including sodium and magnesium found in regional groundwater exceeding GQS.

#### Soil vapor

- Chlorinated VOCs detected at high concentrations and above NYS DOH monitoring thresholds including PCE and TCE; and
- Petroleum VOCs detected at low concentrations.

Although not identified during the investigation, there is potential that petroleum-related VOCs and SVOCs related to the potential presence of suspect gasoline USTs could be encountered.

### **Nature, Extent, Fate and Transport of Contaminants**

Metals are present at very low concentrations in the historic fill materials throughout the Site at shallow depths. Metals were not found in deep onsite soil above Track 1 SCO and were not identified in groundwater at levels exceeding GQS. The VOCs PCE and TCE that were

identified in soil gas at high concentrations were also found in on-Site soil at trace concentrations. Metals including magnesium and sodium were detected in dissolved groundwater but are associated with regional groundwater quality.

### **Potential Routes of Exposure**

The five elements of an exposure pathway are: (1) a contaminant source; (2) contaminant release and transport mechanisms; (3) a point of exposure; (4) a route of exposure; and (5) a receptor population. An exposure pathway is considered complete when all five elements of an exposure pathway are documented. A potential exposure pathway exists when any one or more of the five elements comprising an exposure pathway cannot be documented. An exposure pathway may be eliminated from further evaluation when any one of the five elements comprising an exposure pathway has not existed in the past, does not exist in the present, and will never exist in the future. Three potential primary routes exist by which chemicals can enter the body:

- Ingestion of water, fill or soil;
- Inhalation of vapors and particulates; and
- Dermal contact with water, fill and soil.

### **Existence of Human Health Exposure**

Existing – The Site is entirely developed and is capped with a concrete slab-on grade with isolated alterations from past geotechnical assessments. Therefore, exposure to surficial soil/fill material is possible. Groundwater is not exposed at the Site, and because the Site is served by the public water supply and groundwater use for potable supply is prohibited, groundwater is not used at the Site and there is no potential for exposure. The existing building structure is not air tight and there is potential for soil vapor accumulation.

Construction/ Remediation Activities– Once redevelopment activities begin, construction workers will come into direct contact with surface and subsurface soils as a result of on-Site construction/excavation activities. Similarly, off-Site receptors could be exposed to dust from onsite activities. During construction, on-Site and off-Site exposures to contaminated dust from on-Site will be addressed through dust controls, and through the implementation of the

Community Air Monitoring Plan and a Construction Health and Safety Plan. Groundwater is not anticipated to be encountered, and there will be no structures on site where soil vapor could accumulate.

Proposed Future Conditions – Once the remedial actions and redevelopment of the Site have been completed, there will be no potential onsite exposure pathways. Not only will historic fill be removed, but the Site will also be fully capped with the 6-inch concrete building slab, which will prevent contact with any residual soils. Any exposures to vapors from on-site and off-site sources will be prevented by installation of a vapor barrier and active SSDS, and building slab.

### **Receptor Populations**

The immediate area is mixed use residential/commercial/light industrial, and is anticipated to remain as such. The new building at the site will be utilized as residential facility. Potential receptor populations are as follows:

On-Site Receptors - The Site is currently vacant and contains a 1-story building that was until most recently occupied by a manufacturing facility of wood cabinets. Therefore, the only potential on-Site receptors are trespassers and site representatives. During redevelopment of the Site, the on-Site potential receptors will include construction workers, site representatives, and visitors. Once the Site is redeveloped, the on-Site potential sensitive receptors will include adult and child building residents and visitors.

Off-Site Receptors - Potential offsite receptors within a 0.25-mile radius of the Site include: adult and child residents, commercial and construction workers, pedestrians, trespassers, and cyclists, based on the following:

1. Commercial Businesses (up to 0.25 mile) – existing and future
2. Residential Buildings (up to 0.25 mile) – existing and future
3. Building Construction/Renovation (up to 0.25 mile) – existing and future

4. Pedestrians, Trespassers, Cyclists (up to .25 mile) – existing and future
5. Schools (up to .25 mile) – existing and future
6. Community (up to .25 mile) – existing and future

### **Overall Human Health Exposure Assessment**

Based upon this analysis, complete on-site exposure pathways appear to be present only during the current unremediated phase and the remedial action phase. Under current conditions, preventing access to the Site could minimize on-Site exposure pathways. During the remedial action, on-site exposure pathways will be eliminated by preventing access to the Site, through implementation of soil/materials management, storm water pollution prevention, dust controls, employment of a community air monitoring plan, and implementation of a Construction Health and Safety Plan. This assessment takes into consideration the reasonably anticipated use of the site, which includes a residential structure, site-wide impervious surface cover cap, and a subsurface vapor barrier system for the building. Potential post-construction use of groundwater is not considered an option because groundwater in this area of New York City is not used as a potable water source. There are no surface waters in close proximity to the Site that could be impacted or threatened. After the remedial action is complete, there will be no remaining exposure pathways to on-Site soil/ fill, as all soil that exceeds Track 1 Unrestricted Use SCOs will have been removed, and the vapor barrier, active SSDS, and concrete building slab will interrupt potential for soil vapor intrusion.

## **5.0 REMEDIAL ACTION MANAGEMENT**

### **5.1 PROJECT ORGANIZATION AND OVERSIGHT**

Principal personnel who will participate in the remedial action include Mr. Paul I. Matli, Project Geologist and Ms. Rachel Ataman, Vice President of Technical Services. The Professional Engineer (PE) and Qualified Environmental Professionals (QEP) for this project are Mr. Shaik A. Saad and Mr. Mark E. Robbins.

### **5.2 SITE SECURITY**

The Applicant will control site access of the property through a gated entrance. Barriers will be installed around work areas as needed to delineate and restrict access to the work area. For work areas of limited size, barrier tape will be sufficient to delineate and restrict access. For larger worker areas, temporary fencing will be provided.

### **5.3 WORK HOURS**

The hours for operation of remedial construction will be from 7.00 AM to 5:00 PM. These hours conform to the New York City Department of Buildings construction code requirements.

### **5.4 CONSTRUCTION HEALTH AND SAFETY PLAN**

The Health and Safety Plan is included in Appendix 4. The Site Safety Coordinator will be Mr. Paul I. Matli. Remedial work performed under this RAWP will be in full compliance with applicable health and safety laws and regulations, including Site and OSHA worker safety requirements and HAZWOPER requirements. Confined space entry, if any, will comply with OSHA requirements and industry standards and will address potential risks. The parties performing the remedial construction work will ensure that performance of work is in compliance with the HASP and applicable laws and regulations. The HASP pertains to remedial and invasive work performed at the Site until the issuance of the Notice of Completion.

All field personnel involved in remedial activities will participate in training required under 29 CFR 1910.120, including 40-hour hazardous waste operator training and annual 8-hour refresher training. Site Safety Officer will be responsible for maintaining workers training records.

Personnel entering any exclusion zone will be trained in the provisions of the HASP and be required to sign an HASP acknowledgment. Site-specific training will be provided to field personnel. Additional safety training may be added depending on the tasks performed. Emergency telephone numbers will be posted at the site location before any remedial work begins. A safety meeting will be conducted before each shift begins. Topics to be discussed include task hazards and protective measures (physical, chemical, environmental); emergency procedures; PPE levels and other relevant safety topics. Meetings will be documented in a log book or specific form.

An emergency contact sheet with names and phone numbers is included in the HASP. That document will define the specific project contacts for use in case of emergency.

## **5.5 COMMUNITY AIR MONITORING PLAN**

Real-time air monitoring for volatile organic compounds (VOCs) and particulate levels at the perimeter of the exclusion zone or work area will be performed. Continuous monitoring will be performed for all ground intrusive activities and during the handling of contaminated or potentially contaminated media. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pit excavation or trenching, and the installation of soil borings or monitoring wells.

Periodic monitoring for VOCs will be performed during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. Periodic monitoring during sample collection, for instance, will consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. Depending upon the proximity of potentially exposed individuals, continuous monitoring may be performed during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park,

or adjacent to a school or residence. Exceedances of action levels observed during performance of the Community Air Monitoring Plan (CAMP) will be reported to the OER Project Manager and included in the Daily Report.

### **VOC Monitoring, Response Levels, and Actions**

Volatile organic compounds (VOCs) will be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis during invasive work. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work will be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment will be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment will be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities will resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities will be shutdown.

All 15-minute readings must be recorded and be available for OER personnel to review. Instantaneous readings, if any, used for decision purposes will also be recorded.

## **Particulate Monitoring, Response Levels, and Actions**

Particulate concentrations will be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations. The particulate monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment will be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter ( $\text{mcg}/\text{m}^3$ ) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work will continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed  $150 \text{ mcg}/\text{m}^3$  above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than  $150 \text{ mcg}/\text{m}^3$  above the upwind level, work will be stopped and a re-evaluation of activities initiated. Work will resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within  $150 \text{ mcg}/\text{m}^3$  of the upwind level and in preventing visible dust migration.

All readings will be recorded and be available for OER personnel to review.

## **5.6 AGENCY APPROVALS**

All permits or government approvals required for remedial construction have been or will be obtained prior to the start of remedial construction. Approval of this RAWP by OER does not constitute satisfaction of these requirements and will not be a substitute for any required permit.

## **5.7 SITE PREPARATION**

### **Pre-Construction Meeting**

OER will be invited to attend the pre-construction meeting at the Site with all parties involved in the remedial process prior to the start of remedial construction activities.

### **Mobilization**

Mobilization will be conducted as necessary for each phase of work at the Site. Mobilization includes field personnel orientation, equipment mobilization (including securing all sampling equipment needed for the field investigation), marking/staking sampling locations and utility mark-outs. Each field team member will attend an orientation meeting to become familiar with the general operation of the Site, health and safety requirements, and field procedures.

### **Utility Marker Layouts, Easement Layouts**

The presence of utilities and easements on the Site will be fully investigated prior to the performance of invasive work such as excavation or drilling under this plan by using, at a minimum, the One-Call System (811). Underground utilities may pose an electrocution, explosion, or other hazard during excavation or drilling activities. All invasive activities will be performed in compliance with applicable laws and regulations to assure safety. Utility companies and other responsible authorities will be contacted to locate and mark the locations, and the contractor prior to the start of drilling, excavation or other invasive subsurface operations will retain a copy of the Mark Out Ticket. Overhead utilities may also be present within the anticipated work zones. Maintaining a safe distance between overhead power lines and drill rig masts will prevent electrical hazards associated with drilling in the vicinity of overhead utilities.

Proper safety and protective measures pertaining to utilities and easements, and compliance with all laws and regulations will be employed during invasive and other work contemplated under this RAWP. The integrity and safety of on-Site and off-Site structures will be maintained during all invasive, excavation or other remedial activity performed under the RAWP.

### **Equipment and Material Staging**

Equipment and materials will be stored and staged in a manner that complies with applicable laws and regulations.

### **Stabilized Construction Entrance**

Steps will be taken to ensure that trucks departing the site will not track soil, fill or debris off-Site. Such actions may include use of cleaned asphalt or concrete roads or use of stone or other aggregate-based egress paths between the truck inspection station and the property exit. Measures will be taken to ensure that adjacent roadways will be kept clean of project related soils, fill and debris.

### **Truck Inspection Station**

An outbound-truck inspection station will be set up close to the Site exit. Before exiting the NYC VCP Site, trucks will be required to stop at the truck inspection station and will be examined for evidence of contaminated soil on the undercarriage, body, and wheels. Soil and debris will be removed. Brooms, shovels and potable water will be utilized for the removal of soil from vehicles and equipment, as necessary.

### **Extreme Storm Preparedness and Response Contingency Plan**

Damage from flooding or storm surge can include dislocation of soil and stockpiled materials, dislocation of site structures and construction materials and equipment, and dislocation of support of excavation structures. Damage from wind during an extreme storm event can create unsafe or unstable structures, damage safety structures and cause downed power lines creating dangerous site conditions and loss of power. In the event of emergency conditions caused by an extreme storm event, the enrollee will undertake the following steps for site preparedness prior to the event and response after the event.

#### **Storm Preparedness**

Preparations in advance of an extreme storm event will include the following: containerized hazardous materials and fuels will be removed from the property; loose materials will be secured to prevent dislocation and blowing by wind or water; heavy equipment such as excavators and

generators will be removed from holes, trenches and depressions on the property to high ground or removed from the property; an inventory of the property with photographs will be performed to establish conditions for the site and equipment prior to the event; stockpile covers for soil and fill will be secured by adding weights such as sandbags for added security and worn or ripped stockpile covers will be replaced with competent covers; stockpiled hazardous wastes will be removed from the property; storm water management systems will be inspected and fortified, including, as necessary: clean and reposition silt fences, hay bales; clean storm sewer filters and traps; and secure and protect pumps and hosing.

### **Storm Response**

At the conclusion of an extreme storm event, as soon as it is safe to access the property, a complete inspection of the property will be performed. A site inspection report will be submitted to OER at the completion of site inspection and after the site security is assessed. Site conditions will be compared to the inventory of site conditions and material performed prior to the storm event and significant differences will be noted. Damage from storm conditions that result in acute public safety threats, such as downed power lines or imminent collapse of buildings, structures or equipment will be reported to public safety authorities via appropriate means such as calling 911. Petroleum spills will be reported to NYS DEC within 2 hours of identification and consistent with State regulations. Emergency and spill conditions will also be reported to OER. Public safety structures, such as construction security fences will be repaired promptly to eliminate public safety threats. Debris will be collected and removed. Dewatering will be performed in compliance with existing laws and regulations and consistent with emergency notifications, if any, from proper authorities. Eroded areas of soil including unsafe slopes will be stabilized and fortified. Dislocated materials will be collected and appropriately managed. Support of excavation structure will be inspected and fortified as necessary. Impacted stockpiles will be contained and damaged stockpile covers will be replaced. Storm-water control systems and structures will be inspected and maintained as necessary. If soil or fill materials are discharged off site to adjacent properties, property owners and OER will be notified and corrective measure plan designed to remove and clean dislocated material will be submitted to OER and implemented following approval by OER and granting of site access by the property owner. Impacted offsite areas may require characterization based on site conditions, at the discretion of OER. If onsite petroleum spills are identified, a qualified environmental

professional will determine the nature and extent of the spill and report to NYS DEC's spill hotline at DEC 800-457-7362. If the source of the spill is ongoing and can be identified, it should be stopped if this can be done safely. Potential hazards will be addressed immediately, consistent with guidance issued by NYS DEC.

### **Storm Response Reporting**

A site inspection report will be submitted to OER at the completion of site inspection. An inspection report established by OER is available on OER's website ([www.nyc.gov/oer](http://www.nyc.gov/oer)) and will be used for this purpose. Site conditions will be compared to the inventory of site conditions and material performed prior to the storm event and significant differences will be noted. The site inspection report will be sent to the OER project manager and will include the site name, address, tax block and lot, site primary and alternate contact name and phone number. Damage and soil release assessment will include: whether the project had stockpiles; whether stockpiles were damaged; photographs of damage and notice of plan for repair; report of whether soil from the site was dislocated and whether any of the soil left the site; estimates of the volume of soil that left the site, nature of impact, and photographs; description of erosion damage; description of equipment damage; description of damage to the remedial program or the construction program, such as damage to the support of excavation; presence of onsite or offsite exposure pathways caused by the storm; presence of petroleum or other spills and status of spill reporting to NYS DEC; description of corrective actions; schedule for corrective actions. This report should be completed and submitted to OER project manager with photographs within 24 hours of the time of safe entry to the property after the storm event.

## **5.8 TRAFFIC CONTROL**

Drivers of trucks leaving the NYC VCP Site with soil/fill will be instructed to proceed without stopping in the vicinity of the site to prevent neighborhood impacts. The planned route on local roads for trucks leaving the site is presented in **Figure 5**.

## 5.9 DEMOBILIZATION

Demobilization will include:

- As necessary, restoration of temporary access areas and areas that may have been disturbed to accommodate support areas (e.g., staging areas, decontamination areas, storage areas, temporary water management areas, and access area);
- Removal of sediment from erosion control measures and truck wash and disposal of materials in accordance with applicable laws and regulations;
- Equipment decontamination, and;
- General refuse disposal.

Equipment will be decontaminated and demobilized at the completion of all field activities. Investigation equipment and large equipment (e.g., soil excavators) will be washed at the truck inspection station as necessary. In addition, all investigation and remediation derived waste will be appropriately disposed.

## 5.10 REPORTING AND RECORD KEEPING

### Daily Reports

Daily reports providing a general summary of activities for each day of *active remedial work* will be emailed to the OER Project Manager by the end of the following day. Those reports will include:

- Project number and statement of the activities and an update of progress made and locations of work performed;
- Quantities of material imported and exported from the Site;
- Status of on-Site soil/fill stockpiles;
- A summary of all citizen complaints, with relevant details (basis of complaint; actions taken; etc.);
- A summary of CAMP excursions, if any;
- Photograph of notable Site conditions and activities.

The frequency of the reporting period may be revised in consultation with OER project manager based on planned project tasks. Daily email reports are not intended to be the primary mode of communication for notification to OER of emergencies (accidents, spills), requests for changes to the RAWP or other sensitive or time critical information. However, such information will be included in the daily reports. Emergency conditions and changes to the RAWP will be communicated directly to the OER project manager by personal communication. Daily reports will be included as an Appendix in the Remedial Action Report.

An alpha-numeric site map will be used to identify locations described in reports submitted to OER and is shown in **Figure 6**.

### **Record Keeping and Photo-Documentation**

Job-site record keeping for all remedial work will be performed. These records will be maintained on-Site during the project and will be available for inspection by OER staff. Representative photographs will be taken of the Site prior to any remedial activities and during major remedial activities to illustrate remedial program elements and contaminant source areas. Photographs will be submitted at the completion of the project in the RAR in digital format (i.e. jpeg files).

## **5.11 COMPLAINT MANAGEMENT**

All complaints from citizens will be promptly reported to OER. Complaints will be addressed and outcomes will also be reported to OER in daily reports. Notices to OER will include the nature of the complaint, the party providing the complaint, and the actions taken to resolve any problems.

## **5.12 DEVIATIONS FROM THE REMEDIAL ACTION WORK PLAN**

All changes to the RAWP will be reported to the OER Project Manager and will be documented in daily reports and reported in the Remedial Action Report. The process to be followed if there are any deviations from the RAWP will include a request for approval for the change from OER noting the following:

- Reasons for deviating from the approved RAWP;

- Effect of the deviations on overall remedy; and
- Determination that the remedial action with the deviation(s) is protective of public health and the environment.

## **6.0 REMEDIAL ACTION REPORT**

A Remedial Action Report (RAR) will be submitted to OER following implementation of the remedial action defined in this RAWP. The RAR will document that the remedial work required under this RAWP has been completed and has been performed in compliance with this plan. The RAR will include:

- Information required by this RAWP;
- As-built drawings for all constructed remedial elements, required certifications, manifests and other written and photographic documentation of remedial work performed under this remedy;
- Site Management Plan;
- Description of any changes in the remedial action from the elements provided in this RAWP and associated design documents;
- Tabular summary of all end point sampling results and all material characterization results, QA/QC results for end-point sampling, and other sampling and chemical analysis performed as part of the remedial action;
- Test results or other evidence demonstrating that remedial systems are functioning properly;
- Account of the source area locations and characteristics of all contaminated material removed from the Site including a map showing source areas;
- Account of the disposal destination of all contaminated material removed from the Site. Documentation associated with disposal of all material will include transportation and disposal records, and letters approving receipt of the material.
- Account of the origin and required chemical quality testing for material imported onto the Site.
- Continue registration of the property with an E-Designation.
- Reports and supporting material will be submitted in digital form.

## **Remedial Action Report Certification**

The following certification will appear in front of the Executive Summary of the Remedial Action Report. The certification will include the following statements:

*I, \_\_\_\_\_, am currently a professional engineer licensed by the State of New York. I had primary direct responsibility for implementation of the remedial program for the Site name Site Site number.*

*I, \_\_\_\_\_, am a qualified Environmental Professional. I had primary direct responsibility for implementation remedial program for the Site name Site Site number . (Optional)*


*I certify that the OER-approved Remedial Action Work Plan dated month day year and Stipulations in a letter dated month day, year; if any were implemented and that all requirements in those documents have been substantively complied with. I certify that contaminated soil, fill, liquids or other material from the property were taken to facilities licensed to accept this material in full compliance with applicable laws and regulations.*

## 7.0 SCHEDULE

The table below presents a schedule for the proposed remedial action and reporting. If the schedule for remediation and development activities changes, it will be updated and submitted to OER. Currently, a 24-month remediation period is anticipated.

<b>Schedule Milestone</b>	<b>Weeks from Remedial Action Start</b>	<b>Duration (weeks)</b>
OER Approval of RAWP	0	-
Fact Sheet 2 announcing start of remedy	0	-
Mobilization	2	1
Remedial Excavation	5	3
Demobilization	24	2
Submit Remedial Action Report	35	2

## FIGURES

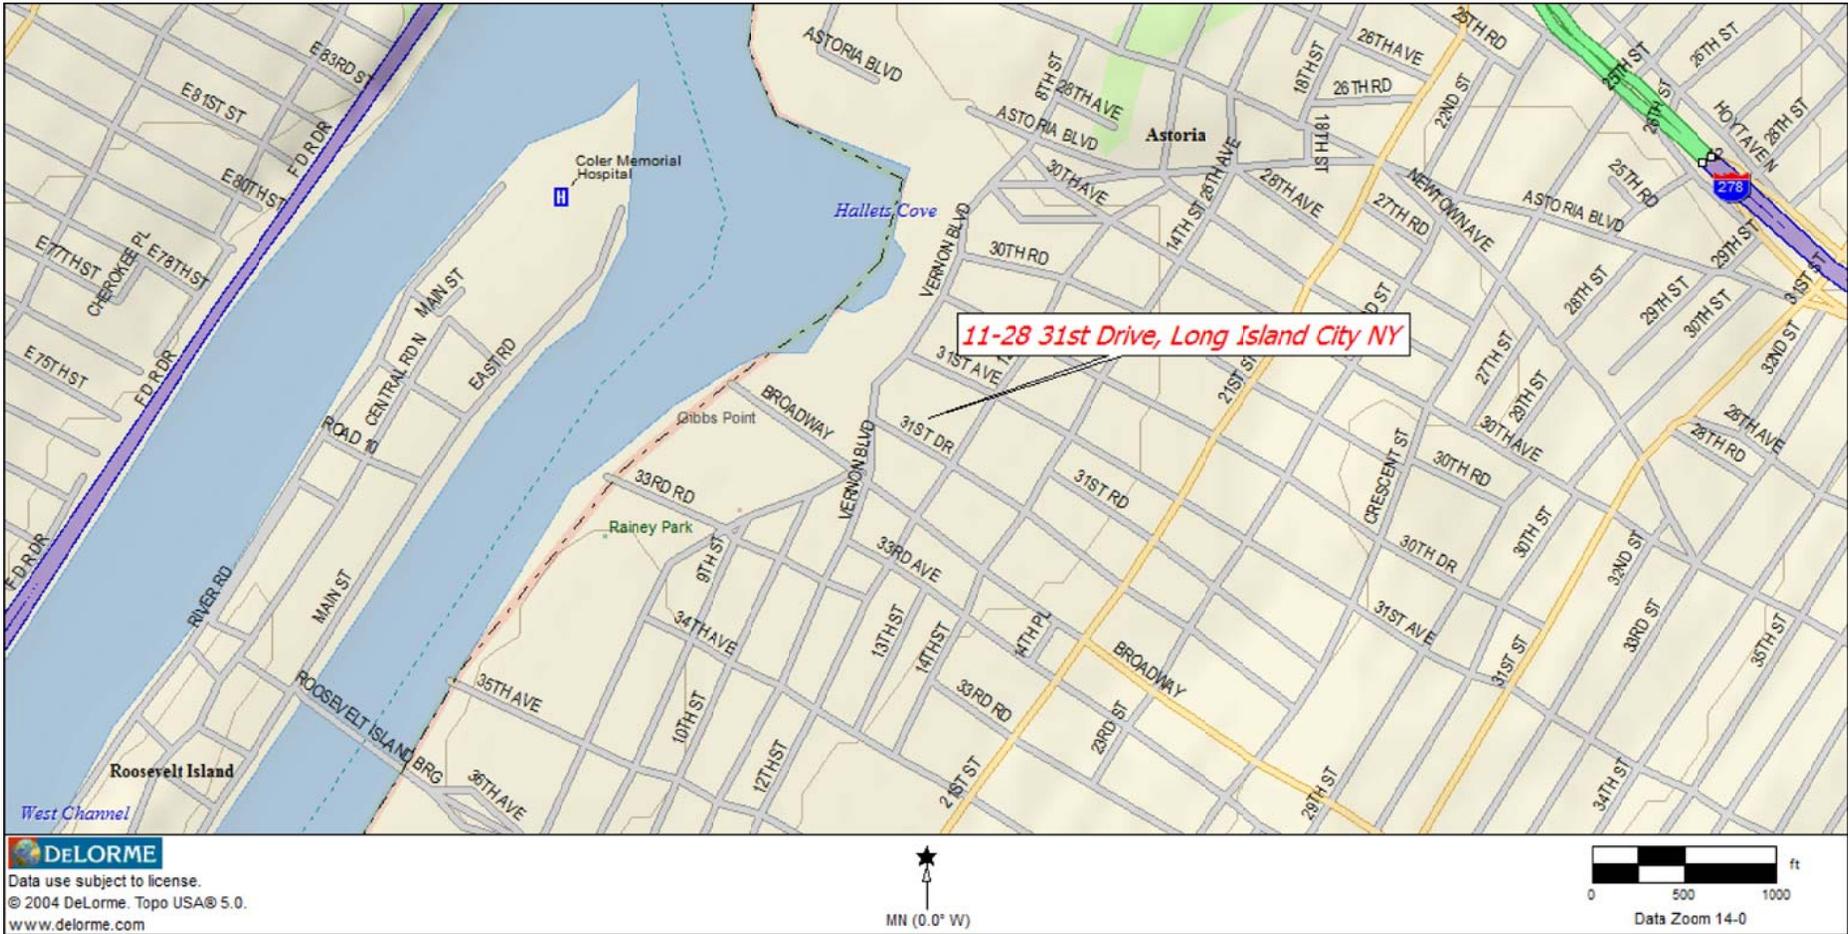

**HYDRO TECH ENVIRONMENTAL CORP.**

MAIN OFFICE: 77 ARKAY DRIVE, SUITE G HAUPPAUGE, NEW YORK 11788 T (631)462-5866 F (631)462-5877  
 NYC OFFICE: 15 OCEAN AVENUE, 2nd Floor BROOKLYN, NEW YORK 11225 T (718)636-0800 F (718)636-0900  
 www.hydrotechenvironmental.com


11-28 31st Drive  
 Long Island City, NY  
 HTE Job# 130030

Drawn By: C.Q.  
 Reviewed By: M.R.  
 Approved By: M.S.  
 Date: 03/19/13  
 Scale: AS NOTED

TITLE:

FIGURE 1: SITE LOCATION MAP

**FIGURE-2**  
**PROPOSED REDEVELOPMENT PLAN**

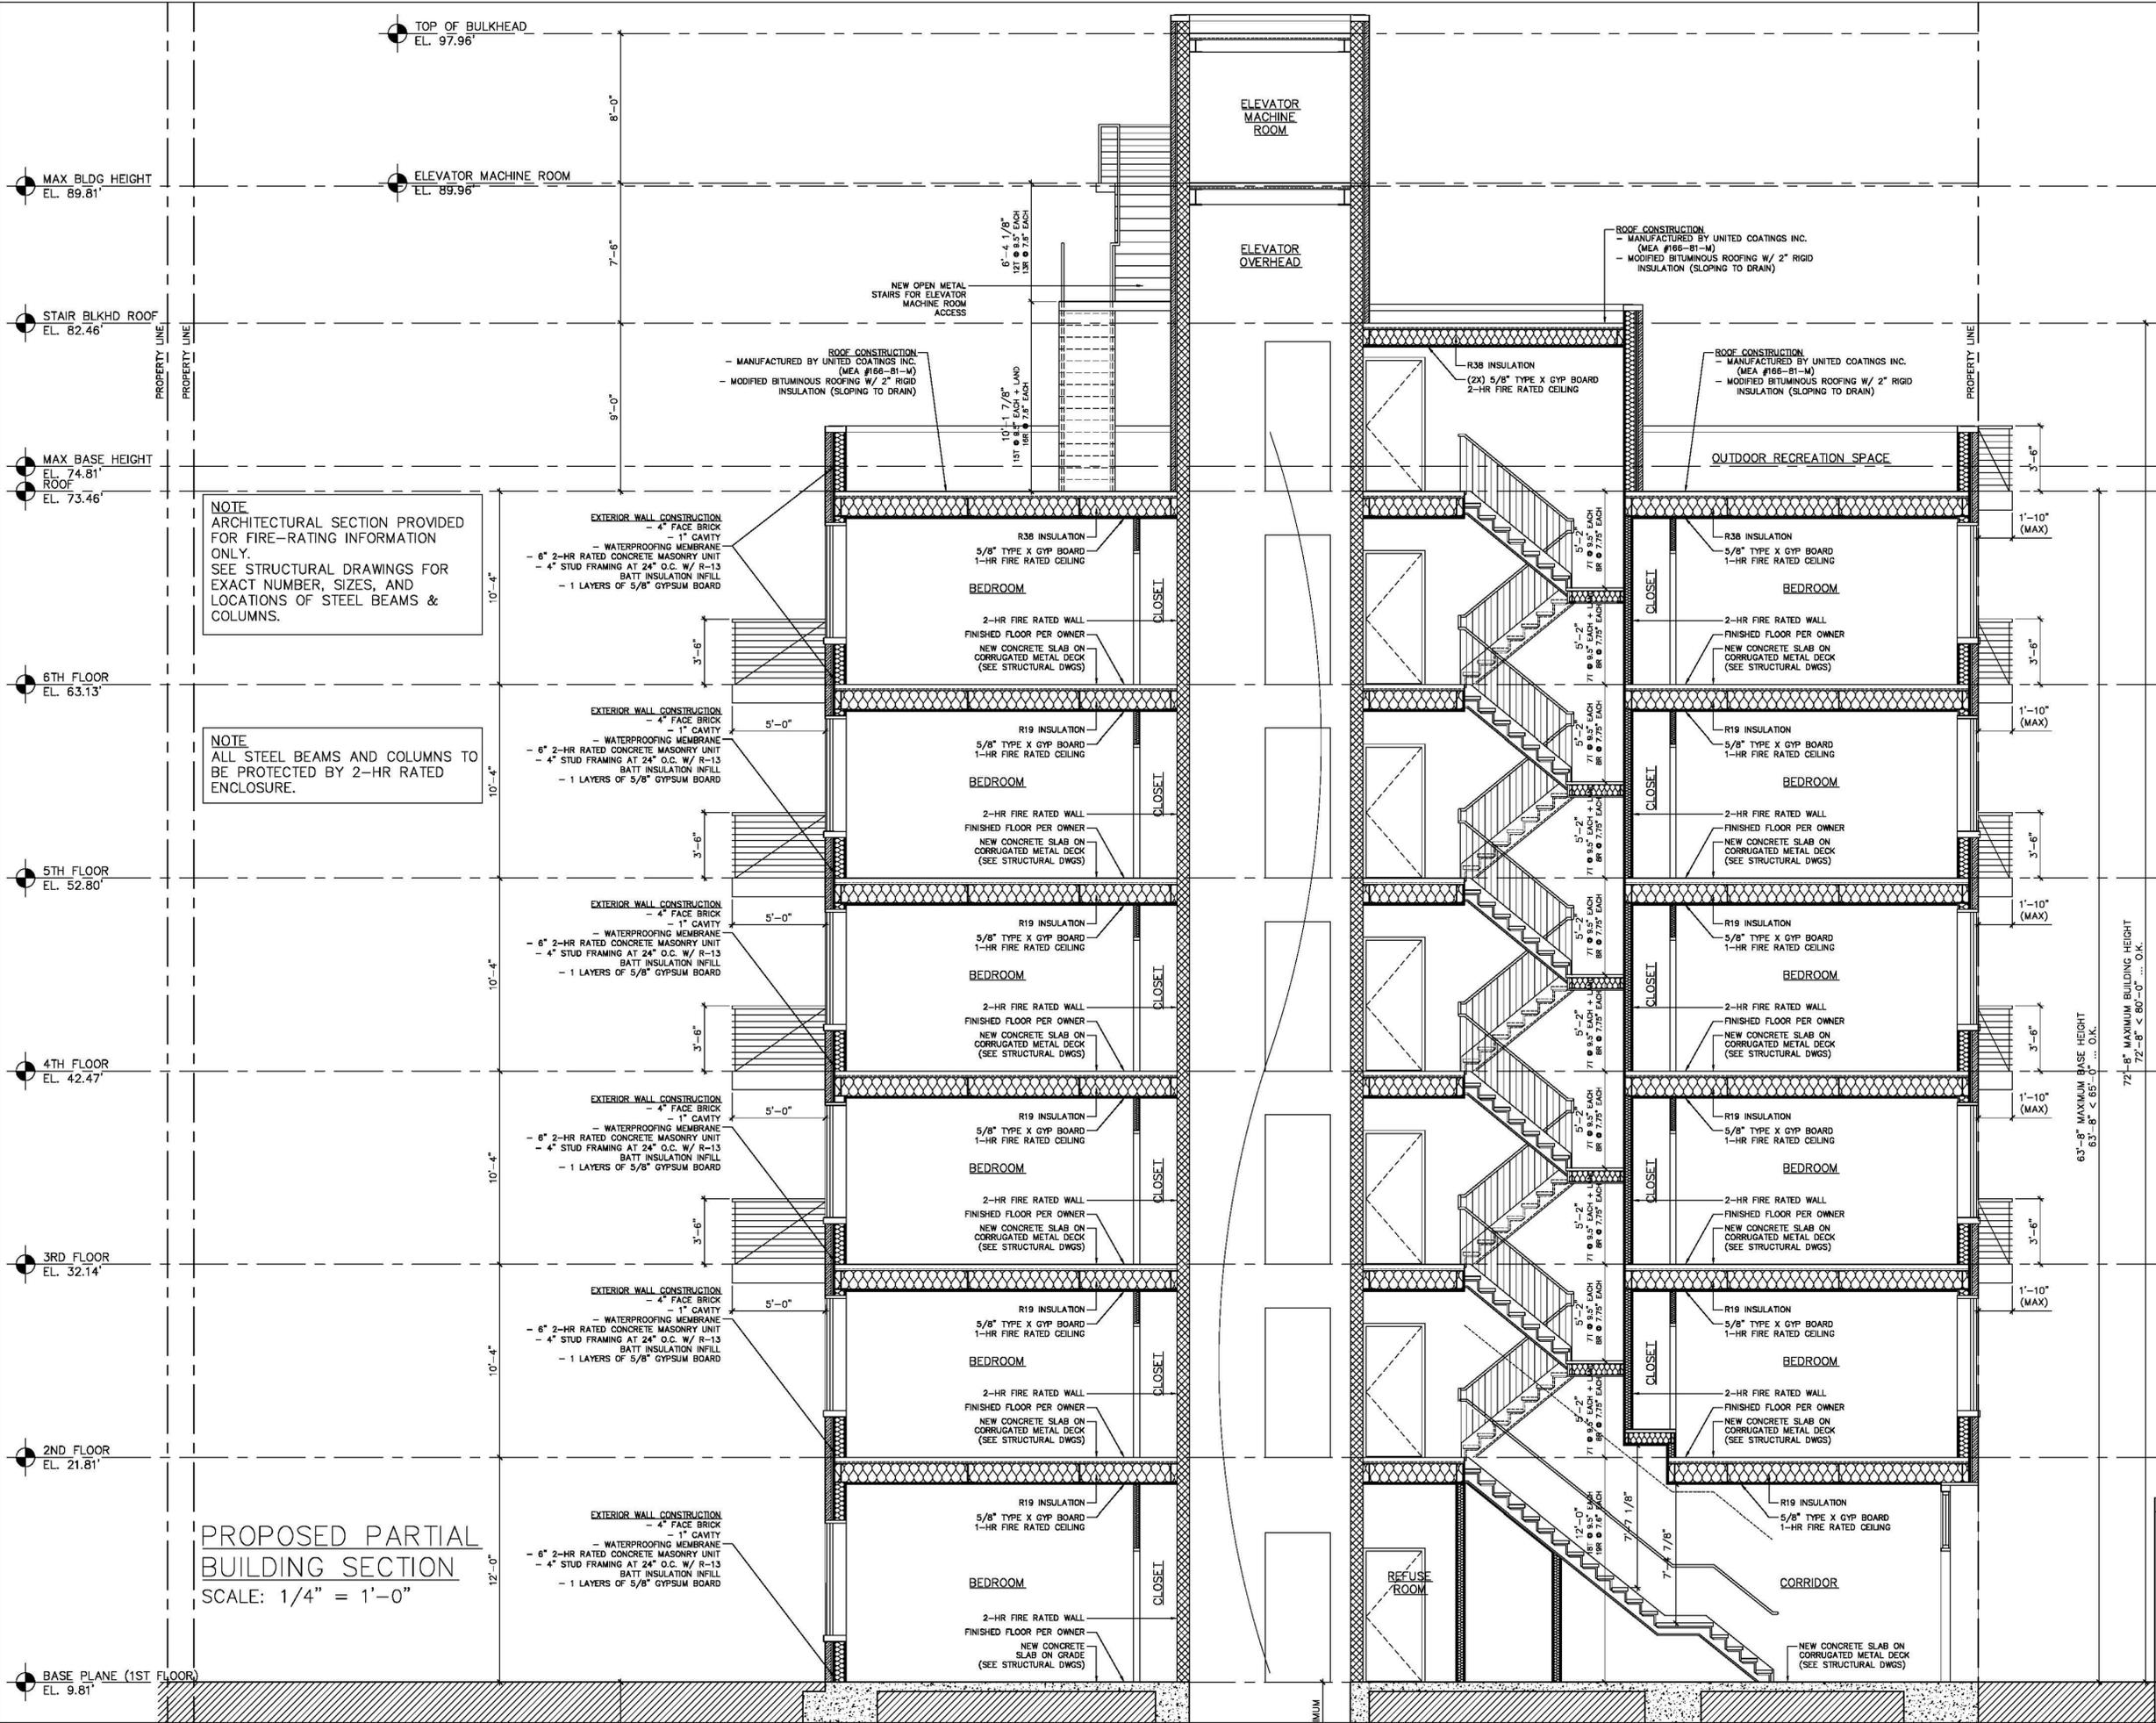

**NOTE**  
 ARCHITECTURAL SECTION PROVIDED FOR FIRE-RATING INFORMATION ONLY. SEE STRUCTURAL DRAWINGS FOR EXACT NUMBER, SIZES, AND LOCATIONS OF STEEL BEAMS & COLUMNS.

**NOTE**  
 ALL STEEL BEAMS AND COLUMNS TO BE PROTECTED BY 2-HR RATED ENCLOSURE.

**PROPOSED PARTIAL BUILDING SECTION**  
 SCALE: 1/4" = 1'-0"

31<sup>ST</sup> DRIVE (CAMELIA STREET)  
 (50' WIDE)

**ARCHITECT**  
 TLI ARCHITECT, PLLC  
 957 56 STREET  
 BROOKLYN, NY 11219  
 (347) 838-0846  
 TLI.ARCHITECT@GMAIL.COM

**CONSULTANTS**


**GENERAL NOTES**  
 THESE PLANS ARE AN INSTRUMENT OF SERVICE AND ARE THE PROPERTY OF THE ARCHITECT. INFRINGEMENT WILL BE PROSECUTED.  
 CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS AND BE RESPONSIBLE FOR FIELD FIT AND QUANTITY OF WORK. NO ALLOWANCES SHALL BE MADE ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR NEGLIGENCE ON HIS/HER PART.  
 THE ARCHITECT SHALL HAVE CONTROL OF THE CONSTRUCTION MEANS, METHODS, DEVIATIONS, TECHNIQUES, SEQUENCES, OR SAFETY PRECAUTIONS IN CONNECTION WITH THE WORK.  
 THE ARCHITECT SHALL NOT BE RESPONSIBLE FOR THE ACTS OR OMISSIONS OF THE CONTRACTOR, SUBCONTRACTORS, OR ANY OTHER PERSONS PERFORMING ANY OF THE WORK, OR FOR THE FAILURE OF ANY OF THEM TO CARRY OUT THE WORK IN ACCORDANCE TO THE CONTRACT DOCUMENTS.

**REVISIONS**

REVISION NO.	REVISION DATE

**PROJECT LOCATION**  
 ALTERATION 1  
 11-28 31 DRIVE  
 QUEENS, NY 11106

**DRAWING TITLE**  
 PARTIAL BUILDING SECTION (UPPER PORTION)



**NYC DOB NUMBER**  
 420605964

**DRAWN BY**  
 TL

**CHECKED BY**  
 TL

**PROJECT NO.**  
 12-007


**DATE**  
 03-07-2013

**DWG NO.**  
 A-005.00

**PAGE NO.**  
 11 OF 22

**FIGURE-3  
LAND-USE MAP**

# Landuse Map 11-28 31 Drive, Queens, New York

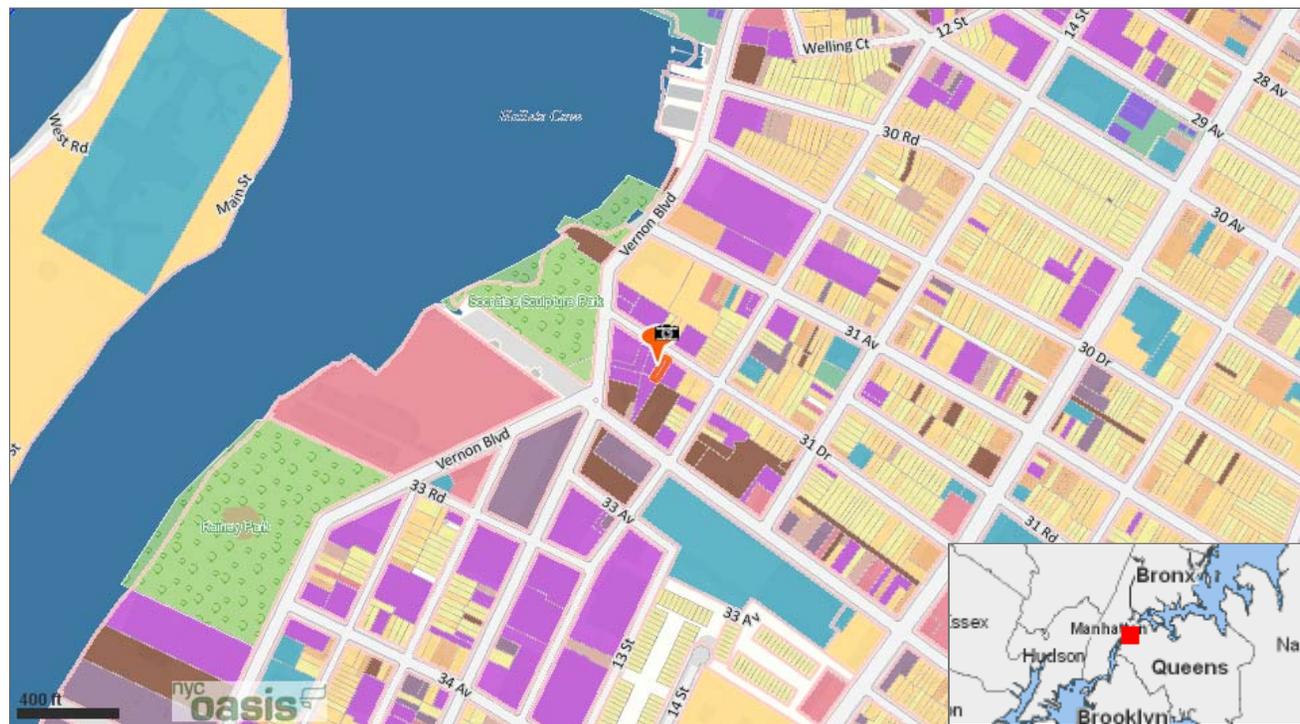

## Legend

- Transit, Roads, Reference Features**
  - Roads, ferries, commuter rail, neighborhood names
  - Roads**
    - Major Roads
    - Interstate Highways
    - Tunnels
  - Neighborhood/Town Labels**
    - County Boundaries
    - Ferry
    - Commuter Rail
  - NYC subway routes and stations
- Parks, Playgrounds, & Open Space**
  - Parks & Public Lands
  - Forested Areas (NJ)
  - Community Gardens
  - School property with garden
  - Playgrounds
  - Green Spaces Along Streets
  - Golf Courses
  - Baseball/Soccer/Football Fields
  - Tennis/Basketball/Handball Courts & Tracks
  - Cemeteries
- Land Use**
  - Block/Lot Boundaries
    - (Building footprints in gray)
  - 1 & 2 Family Residential
  - Multi-family Residential
  - Mixed Use
  - Open space & outdoor recreation
  - Commercial
  - Institutions
  - Industrial
  - Parking
  - Transportation / Utilities
  - Vacant Lots

(Not all items in the legend may be visible on the map.)



This map was created using the Open Accessible Space Information System (OASIS) website, licensed under a [Creative Commons Attribution-NonCommercial-Share Alike 3.0 United States License](https://creativecommons.org/licenses/by-nc-sa/3.0/). Visit [www.oasisnyc.net](http://www.oasisnyc.net) for the latest information about data sources and notes about how the maps were developed. Contact [oasisnyc@gc.cuny.edu](mailto:oasisnyc@gc.cuny.edu) with questions or comments. OASIS is developed and maintained by the [Center for Urban Research](http://www.cuny.edu/center-for-urban-research/), CUNY Graduate Center.

ADJACENT 1-STORY  
COMMERCIAL

31st DRIVE


SIDEWALK

ADJACENT 1-STORY  
COMMERCIAL

ELEVATOR  
PIT

ADJACENT 1-STORY  
COMMERCIAL

ADJACENT 1-STORY  
COMMERCIAL



LEGEND:

 EXCAVATION TO 3 FEET

 EXCAVATION TO 5 FEET 8 INCHES



**HYDRO TECH ENVIRONMENTAL CORP.**

MAIN OFFICE: 77 ARKAY DRIVE, SUITE G  
HAUPPAUGE, NEW YORK 11788  
T (631)462-5866 F (631)462-5877  
www.hydrotechenvironmental.com

NYC OFFICE: 15 OCEAN AVENUE, 2nd Floor  
BROOKLYN, NEW YORK 11225  
T (718)636-0800 F (718)636-0900

11-28 31st Drive  
Long Island City, NY  
HTE Job# 130030

Drawn By: C.Q.  
Reviewed By: M.R.  
Approved By: M.S.  
Date: 06/12/13  
Scale: AS NOTED


TITLE:

FIGURE 4: LOCATION OF PLANNED SITE EXCAVATION

**FIGURE-5**  
**WASTE TRANSPORT VEHICLES ROUTE**



**Directions to George Washington Bridge**  
Fort Washington Ave, New York, NY 10033  
**8.8 mi – about 20 mins**

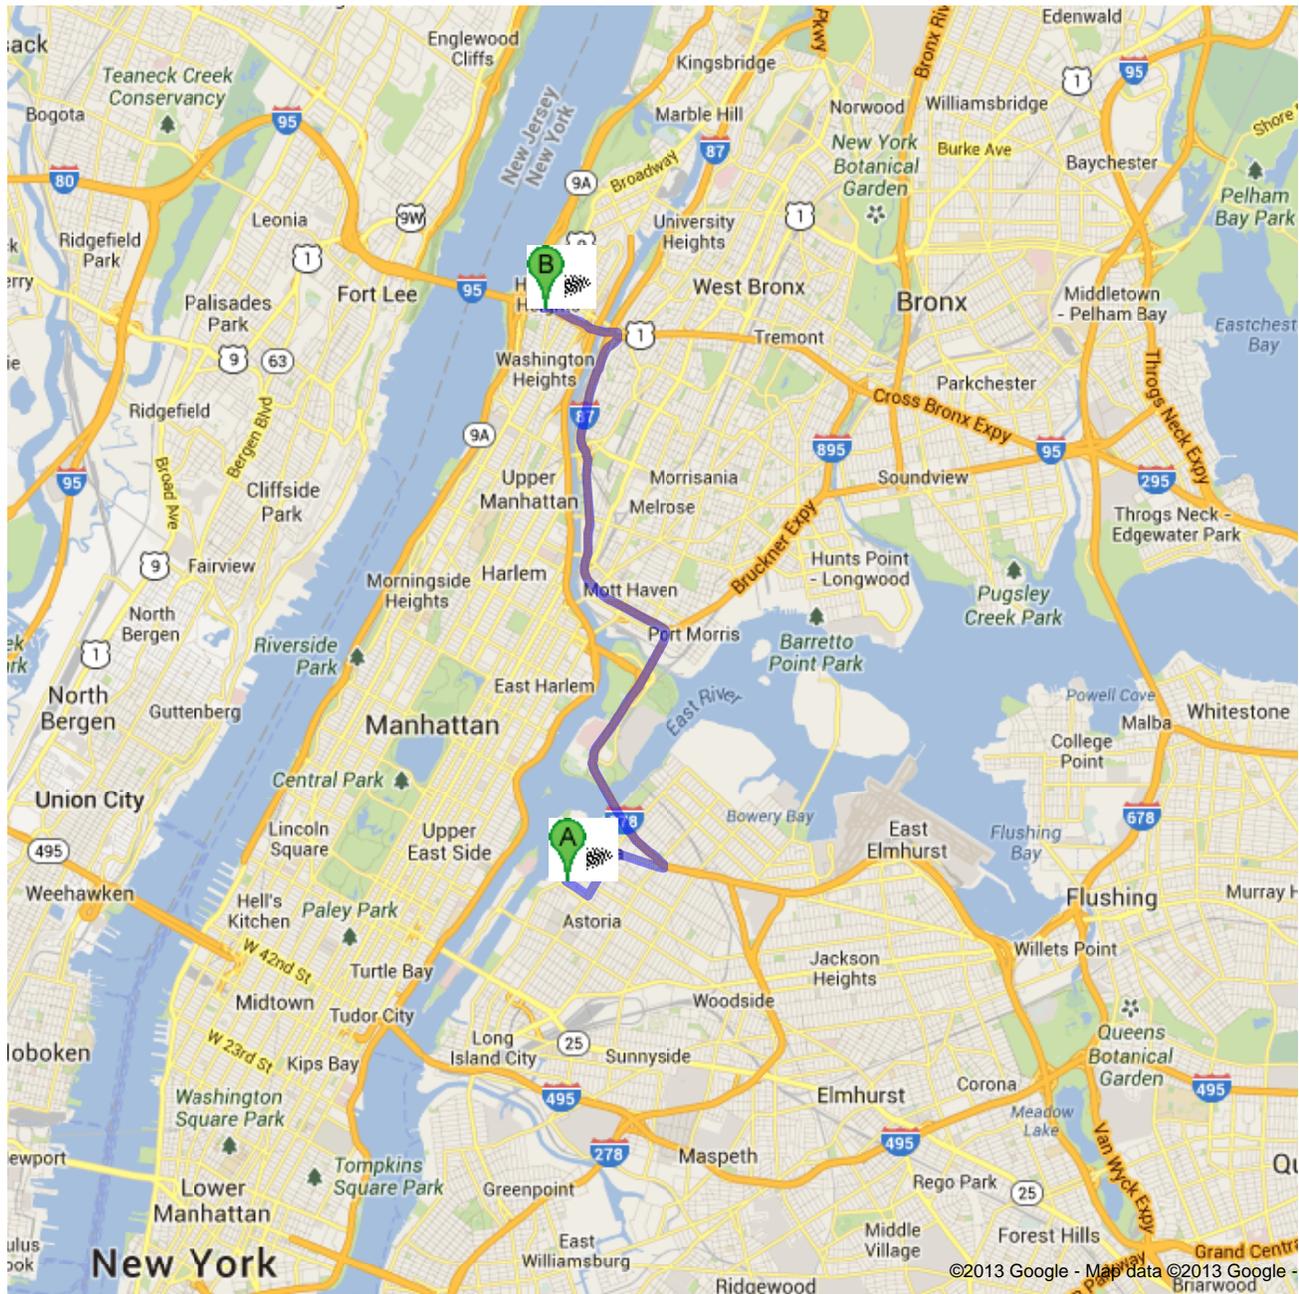


 11-28 31st Dr, Queens, NY 11106

	1. Head <b>southeast</b> on <b>31st Dr</b> toward <b>12th St</b> About 1 min	go 0.3 mi total 0.3 mi
	2. Turn left at the 3rd cross street onto <b>21st St</b> About 2 mins	go 0.5 mi total 0.8 mi
	3. Turn right onto <b>Astoria Blvd</b> About 2 mins	go 0.5 mi total 1.3 mi
	4. Turn left onto <b>33rd St</b> About 52 secs	go 230 ft total 1.3 mi
	5. Turn left onto <b>Hoyt Ave N</b> About 1 min	go 0.1 mi total 1.4 mi
	6. Slight left onto the <b>Interstate 278 E/Robert F Kennedy Bridge</b> ramp to <b>Manhattan/Bronx/Randalls Island</b> <b>Toll road</b>	go 443 ft total 1.5 mi
	7. Merge onto <b>I-278 E/Robert F. Kennedy Bridge</b> <b>Partial toll road</b> About 3 mins	go 2.4 mi total 3.9 mi
	8. Take exit <b>47</b> on the left for <b>Interstate 87 N/Major Deegan Expressway</b> toward <b>Albany</b>	go 0.2 mi total 4.2 mi
	9. Merge onto <b>I-87 N</b> About 4 mins	go 2.9 mi total 7.0 mi
	10. Take exit <b>7N-7S</b> for <b>U.S. 1 N/Interstate 95 N/Cross Bronx Expressway/Interstate 95 S</b> toward <b>New Haven/G Washington Bridge/Trenton</b>	go 0.2 mi total 7.2 mi
	11. Take exit <b>7S</b> on the left for <b>Interstate 95 S/U.S. 1 S</b> toward <b>George Washington Bridge/Trenton</b> About 49 secs	go 0.4 mi total 7.6 mi
	12. Merge onto <b>I-95 S/U.S. 1 S</b>	go 0.1 mi total 7.7 mi
	13. Take the <b>Interstate 95 S/US 1 S/G W Bridge Lower Level</b> exit	go 0.1 mi total 7.9 mi
	14. Merge onto <b>Interstate 95 Lower Level S</b>	go 0.4 mi total 8.3 mi
	15. Take exit <b>1</b> toward <b>New York 9A N</b>	go 0.2 mi total 8.5 mi
	16. Turn right onto <b>Haven Ave</b>	go 144 ft total 8.5 mi
	17. Take the 1st right onto <b>W 181st St/Plaza Lafayette</b> Continue to follow W 181st St About 53 secs	go 0.2 mi total 8.6 mi
	18. Turn right onto <b>Fort Washington Ave</b> Destination will be on the right About 2 mins	go 0.1 mi total 8.8 mi


 **George Washington Bridge**  
Fort Washington Ave, New York, NY 10033

These directions are for planning purposes only. You may find that construction projects, traffic, weather, or other events may cause conditions to differ from the map results, and you should plan your route accordingly. You must obey all signs or notices regarding your



31st DRIVE

SIDEWALK

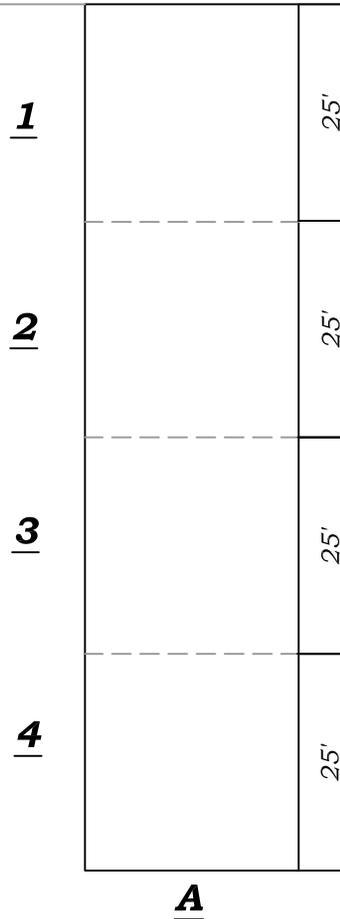

**HYDRO TECH ENVIRONMENTAL CORP.**

MAIN OFFICE: 77 ARKAY DRIVE, SUITE G  
HAUPPAUGE, NEW YORK 11788  
T (631)462-5866 F (631)462-5877  
www.hydrotechenvironmental.com

NYC OFFICE: 15 OCEAN AVENUE, 2nd Floor  
BROOKLYN, NEW YORK 11225

11-28 31st Drive  
Long Island City, NY  
HTE Job# 130030

Drawn By: C.Q.  
Reviewed By: M.R.  
Approved By: M.S.  
Date: 06/12/13  
Scale: AS NOTED

TITLE:

FIGURE 6: ALPHA-NUMERIC SITE MAP

# APPENDIX 1

## CITIZEN PARTICIPATION PLAN

The NYC Office of Environmental Remediation and Mr. George Mann have established this Citizen Participation Plan because the opportunity for citizen participation is an important component of the NYC Voluntary Cleanup Program. This Citizen Participation Plan describes how information about the project will be disseminated to the Community during the remedial process. As part of its obligations under the NYC VCP, Mr. George Mann will maintain a repository for project documents and provide public notice at specified times throughout the remedial program. This Plan also takes into account potential environmental justice concerns in the community that surrounds the project Site. Under this Citizen Participation Plan, project documents and work plans are made available to the public in a timely manner. Public comment on work plans is strongly encouraged during public comment periods. The NYC Office of Environmental Remediation (OER) does not approve work plans until public comment periods have expired and all comments are formally reviewed. An explanation of cleanup plans in the form of a public meeting or informational session is available upon request to OER's project manager assigned to this Site, OER's project manager assigned to this Site, Mr. William E. Wong, who can be contacted about these issues or any others questions, comments or concerns that arise during the remedial process at (212) 788-8841

**Project Contact List.** OER has established a Site Contact List for this project to provide public notices in the form of fact sheets to interested members of the Community. Communications will include updates on important information relating to the progress of the cleanup program at the Site as well as to request public comments on the cleanup plan. The Project Contact List includes owners and occupants of adjacent buildings and homes, principal administrators of nearby schools, hospitals and day care centers, the public water supplier that serves the area, established document repositories, the representative Community Board, City Council members, other elected representatives and any local Brownfield Opportunity Area (BOA) grantee organizations. Any member of the public or organization will be added to the

Site Contact List on request. A copy of the Site Contact List is maintained by OER's project manager. If you would like to be added to the Project Contact List, contact NYC OER at (212) 788-8841 or by email at [brownfields@cityhall.nyc.gov](mailto:brownfields@cityhall.nyc.gov).

**Repositories.** A document repository is maintained in the nearest public library that maintains evening and weekend hours. This document repository is intended to house, for community review, all principal documents generated during the cleanup program including Remedial Investigation plans and reports, Remedial Action work plans and reports, and all public notices and fact sheets produced during the lifetime of the remedial project. Mr. George Mann will inspect the repositories to ensure that they are fully populated with project information. The repository for this project is:

Queens Library - Astoria

14-01 Astoria Blvd, Astoria, NY

(718) 278-2220

Monday, Thursday and Friday: 11:00 AM to 7:00 PM

Tuesday: 2:00 PM to 7:00 PM

Wednesday: 1:00 PM to 7:00 PM

Saturday and Sunday Closed

**Digital Documentation.** NYC OER strongly encourages the use of digital documents in repositories as a means of minimizing paper use while also increasing convenience in access and ease of use.

**Public Notice and Public Comment.** Public notice to all members of the Project Contact List is required at three major steps during the performance of the cleanup program (listed below) and at other points that may be required by OER. Notices will include Fact Sheets with descriptive project summaries, updates on recent and upcoming project activities, repository information, and important phone and email contact information. All notices will be prepared by Mr. George Mann, reviewed and approved by OER prior to distribution and mailed by Mr. George Mann. Public comment is solicited in public notices for all work plans developed under

the NYC Voluntary Cleanup Program. Final review of all work plans by OER will consider all public comments. Approval will not be granted until the public comment period has been completed.

**Citizen Participation Milestones.** Public notice and public comment activities occur at several steps during a typical NYC VCP project. See flow chart on the following page, which identifies when during the NYC VCP public notices are issued: These steps include:

- **Public Notice of the availability of the Remedial Investigation Report and Remedial Action Work Plan and a 30-day public comment period on the Remedial Action Work Plan.**

Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the availability of the Remedial Investigation Report and Remedial Action Work Plan and the initiation of a 30-day public comment period on the Remedial Action Work Plan. The Fact Sheet summarizes the findings of the RIR and provides details of the RAWP. The public comment period will be extended an additional 15 days upon public request. A public meeting or informational session will be conducted by OER upon request.

- **Public Notice announcing the approval of the RAWP and the start of remediation**

Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the approval of the RAWP and the start of remediation.

- **Public Notice announcing the completion of remediation, designation of Institutional and Engineering Controls and issuance of the Notice of Completion**

Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the completion of remediation, providing a list of all Institutional and Engineering Controls implemented for to the Site and announcing the issuance of the Notice of Completion.

## **APPENDIX 2**

### **SUSTAINABILITY STATEMENT**

This Sustainability Statement documents sustainable activities and green remediation efforts planned under this remedial action.

**Reuse of Clean, Recyclable Materials.** Reuse of clean, locally-derived recyclable materials reduces consumption of non-renewable virgin resources and can provide energy savings and greenhouse gas reduction.

An estimate of the quantity (in tons) of clean, non-virgin materials (reported by type of material) reused under this plan will be quantified and reported in the RAR.

**Reduce Consumption of Virgin and Non-Renewable Resources.** Reduced consumption of virgin and non-renewable resources lowers the overall environmental impact of the project on the region by conserving these resources.

An estimate of the quantity (in tons) of virgin and non-renewable resources, the use of which will be avoided under this plan, will be quantified and reported in the RAR.

**Reduced Energy Consumption and Promotion of Greater Energy Efficiency.** Reduced energy consumption lowers greenhouse gas emissions, improves local air quality, lessens in-city power generation requirements, can lower traffic congestion, and provides substantial cost savings.

Best efforts will be made to quantify energy efficiencies achieved during the remediation and will be reported in the Remedial Action Report (RAR). Where energy savings cannot be easily quantified, a gross indicator of the amount of energy saved or the means by which energy savings was achieved will be reported.

**Conversion to Clean Fuels.** Use of clean fuel improves NYC's air quality by reducing harmful emissions.

An estimate of the volume of clean fuels used during remedial activities will be quantified and reported in the RAR.

**Recontamination Control.** Recontamination after cleanup and redevelopment is completed undermines the value of work performed, may result in a property that is less protective of public health or the environment, and may necessitate additional cleanup work later or impede future redevelopment. Recontamination can arise from future releases that occur within the property or by influx of contamination from off-Site.

An estimate of the area of the Site that utilizes recontamination controls under this plan will be reported in the RAR in square feet.

**Storm-water Retention.** Storm-water retention improves water quality by lowering the rate of combined storm-water and sewer discharges to NYC's sewage treatment plants during periods of precipitation, and reduces the volume of untreated influent to local surface waters.

An estimate of the enhanced storm-water retention capability of the redevelopment project will be included in the RAR.

**Linkage with Green Building.** Green buildings provide a multitude of benefits to the city across a broad range of areas, such as reduction of energy consumption, conservation of resources, and reduction in toxic materials use.

The number of Green Buildings that are associated with this brownfield redevelopment property will be reported in the RAR. The total square footage of green building space created as a function of this brownfield redevelopment will be quantified for residential, commercial and industrial/manufacturing uses.

**Paperless Brownfield Cleanup Program.** Mr. George Mann is participating in OER's Paperless Brownfield Cleanup Program. Under this program, submission of electronic documents will replace submission of hard copies for the review of project documents, communications and milestone reports.

**Low-Energy Project Management Program.** Mr. George Mann is participating in OER's low-energy project management program. Under this program, whenever possible, meetings are held using remote communication technologies, such as videoconferencing and teleconferencing to reduce energy consumption and traffic congestion associated with personal transportation.

**Trees and Plantings.** Trees and other plantings provide habitat and add to NYC's environmental quality in a wide variety of ways. Native plant species and native habitat provide optimal support to local fauna, promote local biodiversity, and require less maintenance.

An estimate of the land area that will be vegetated, including the number of trees planted or preserved, will be reported in square feet in the RAR.

## **APPENDIX 3**

### **SOIL/MATERIALS MANAGEMENT PLAN**

#### **1.1 SOIL SCREENING METHODS**

Visual, olfactory and PID soil screening and assessment will be performed under the supervision of a Qualified Environmental Professional and will be reported in the RAR. Soil screening will be performed during invasive work performed during the remedy and development phases prior to issuance of the Notice of Completion.

#### **1.2 STOCKPILE METHODS**

Excavated soil from suspected areas of contamination (e.g., hot spots, USTs, drains, etc.) will be stockpiled separately and will be segregated from clean soil and construction materials. Stockpiles will be used only when necessary and will be removed as soon as practicable. While stockpiles are in place, they will be inspected daily, and before and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by OER. Excavated soils will be stockpiled on, at minimum, double layers of 8-mil minimum sheeting, will be kept covered at all times with appropriately anchored plastic tarps, and will be routinely inspected. Broken or ripped tarps will be promptly replaced.

All stockpile activities will be compliant with applicable laws and regulations. Soil stockpile areas will be appropriately graded to control run-off in accordance with applicable laws and regulations. Stockpiles of excavated soils and other materials shall be located at least of 50 feet from the property boundaries, where possible. Hay bales or equivalent will surround soil stockpiles except for areas where access by equipment is required. Silt fencing and hay bales will be used as needed near catch basins, surface waters and other discharge points.

#### **1.3 CHARACTERIZATION OF EXCAVATED MATERIALS**

Soil/fill or other excavated media that is transported off-Site for disposal will be sampled in a manner required by the receiving facility, and in compliance with applicable laws and regulations. Soils proposed for reuse on-Site will be managed as defined in this plan.

#### **1.4 MATERIALS EXCAVATION, LOAD-OUT AND DEPARTURE**

The PE/QEP overseeing the remedial action will:

- Oversee remedial work and the excavation and load-out of excavated material;
- Ensure that there is a party responsible for the safe execution of invasive and other work performed under this work plan;
- Ensure that Site development activities and development-related grading cuts will not interfere with, or otherwise impair or compromise the remedial activities proposed in this RAWP;
- Ensure that the presence of utilities and easements on the Site has been investigated and that any identified risks from work proposed under this plan are properly addressed by appropriate parties;
- Ensure that all loaded outbound trucks are inspected and cleaned if necessary before leaving the Site;
- Ensure that all egress points for truck and equipment transport from the Site will be kept clean of Site-derived materials during Site remediation.

Locations where vehicles exit the Site shall be inspected daily for evidence of soil tracking off premises. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site-derived materials.

Open and uncontrolled mechanical processing of historical fill and contaminated soil on-Site will not be performed without prior OER approval.

#### **1.5 OFF-SITE MATERIALS TRANSPORT**

Loaded vehicles leaving the Site will comply with all applicable materials transportation requirements (including appropriate covering, manifests, and placards) in accordance with applicable laws and regulations, including use of licensed haulers in accordance with 6 NYCRR Part 364. If loads contain wet material capable of causing leakage from trucks, truck liners will be used. Queuing of trucks will be performed on-Site, when possible in order to minimize off Site disturbance. Off-Site queuing will be minimized.

Outbound truck transport routes are included as **Figure 5**. This routing takes into account the following factors: (a) limiting transport through residential areas and past sensitive sites; (b) use of mapped truck routes; (c) minimizing off-Site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; and (f) overall safety in transport. To the extent possible, all trucks loaded with Site materials will travel from the Site using these truck routes. Trucks will not stop or idle in the neighborhood after leaving the project Site.

## **1.6 MATERIALS DISPOSAL OFF-SITE**

The following documentation will be established and reported by the PE/QEP for each disposal destination used in this project to document that the disposal of regulated material exported from the Site conforms with applicable laws and regulations: (1) a letter from the PE/QEP or Enrollee to each disposal facility describing the material to be disposed and requesting written acceptance of the material. This letter will state that material to be disposed is regulated material generated at an environmental remediation Site in Queens, New York under a governmental remediation program. The letter will provide the project identity and the name and phone number of the PE/QEP or Enrollee. The letter will include as an attachment a summary of all chemical data for the material being transported; and (2) a letter from each disposal facility stating it is in receipt of the correspondence (1, above) and is approved to accept the material. These documents will be included in the RAR.

The Remedial Action Report will include an itemized account of the destination of all material removed from the Site during this remedial action. Documentation associated with disposal of all material will include records and approvals for receipt of the material. This information will be presented in the RAR.

All impacted soil/fill or other waste excavated and removed from the Site will be managed as regulated material and will be disposed in accordance with applicable laws and regulations. Historic fill and contaminated soils taken off-Site will be handled as solid waste and will not be disposed at a Part 360-16 Registration Facility (also known as a Soil Recycling Facility).

Waste characterization will be performed for off-Site disposal in a manner required by the receiving facility and in conformance with its applicable permits. Waste characterization

sampling and analytical methods, sampling frequency, analytical results and QA/QC will be reported in the RAR. A manifest system for off-Site transportation of exported materials will be employed. Manifest information will be reported in the RAR. Hazardous wastes derived from on-Site will be stored, transported, and disposed of in compliance with applicable laws and regulations.

If disposal of soil/fill from this Site is proposed for unregulated disposal (i.e., clean soil removed for development purposes), including transport to a Part 360-16 Registration Facility, a formal request will be made for approval by OER with an associated plan compliant with 6NYCRR Part 360-16. This request and plan will include the location, volume and a description of the material to be recycled, including verification that the material is not impacted by site uses and that the material complies with receipt requirements for recycling under 6NYCRR Part 360. This material will be appropriately handled on-Site to prevent mixing with impacted material.

## **1.7 MATERIALS REUSE ON-SITE**

Soil and fill that is derived from the property that meets the soil cleanup objectives established in this plan may be reused on-Site. The soil cleanup objectives for on-Site reuse are the Track 1 Unrestricted Use SCOs. 'Reuse on-Site' means material that is excavated during the remedy or development, does not leave the property, and is relocated within the same property and on comparable soil/fill material, and addressed pursuant to the NYC VCP agreement subject to Engineering and Institutional Controls. The PE/QEP will ensure that reused materials are segregated from other materials to be exported from the Site and that procedures defined for material reuse in this RAWP are followed. The expected location for placement of reused material will be provided in the RAR.

Organic matter (wood, roots, stumps, etc.) or other waste derived from clearing and grubbing of the Site will not be buried on-Site. Soil or fill excavated from the site for grading or other purposes will not be reused within a cover soil layer or within landscaping berms.

## **1.8 DEMARCATION**

After completion of hotspot removal and any other invasive remedial activities, and prior to backfilling, the top of the residual soil/fill will be defined by one of three methods: (1) placement

of a demarcation layer. The demarcation layer will consist of geosynthetic fencing or equivalent material to be placed on the surface of residual soil/fill to provide an observable reference layer. A description or map of the approximate depth of the demarcation layer will be provided in the SMP; or (2) a land survey of the top elevation of residual soil/fill before the placement of cover soils, pavement and associated sub-soils, or other materials or structures or, (3) all materials beneath the approved cover will be considered impacted and subject to site management after the remedy is complete. Demarcation may be established by one or any combination of these three methods. As appropriate, a map showing the method of demarcation for the Site and all associated documentation will be presented in the RAR.

This demarcation will constitute the top of the site management horizon. Materials within this horizon require adherence to special conditions during future invasive activities as defined in the Site Management Plan.

## **1.9 IMPORT OF BACKFILL SOIL FROM OFF-SITE SOURCES**

This Section presents the requirements for imported fill materials to be used below the cover layer and within the clean soil cover layer. All imported soils will meet OER-approved backfill and cover soil quality objectives for this Site. The backfill and cover soil quality objectives are Track 1 Unrestricted Use SCOs.

A process will be established to evaluate sources of backfill and cover soil to be imported to the Site, and will include an examination of source location, current and historical use(s), and any applicable documentation. Material from industrial sites, spill sites, environmental remediation sites or other potentially contaminated sites will not be imported to the Site.

The following potential sources may be used pending attainment of backfill and cover soil quality objectives:

- Clean soil from construction projects at non-industrial sites in compliance with applicable laws and regulations;
- Clean soil from roadway or other transportation-related projects in compliance with applicable laws and regulations;

- Clean recycled concrete aggregate (RCA) from facilities permitted or registered by the regulations of NYS DEC.

All materials received for import to the Site will be approved by a PE/QEP and will be in compliance with provisions in this RAWP. The RAR will report the source of the fill, evidence that an inspection was performed on the source, chemical sampling results, frequency of testing, and a Site map indicating the locations where backfill or soil cover was placed.

### **Source Screening and Testing**

Inspection of imported fill material will include visual, olfactory and PID screening for evidence of contamination. Materials imported to the Site will be subject to inspection, as follows:

- Trucks with imported fill material will be in compliance with applicable laws and regulations and will enter the Site at designated locations;
- The PE/QEP is responsible to ensure that every truck load of imported material is inspected for evidence of contamination; and
- Fill material will be free of solid waste including pavement materials, debris, stumps, roots, and other organic matter, as well as ashes, oil, perishables or foreign matter.

Composite samples of imported material will be taken at a minimum frequency of one sample for every 500 cubic yards of material. Once it is determined that the fill material meets imported backfill or cover soil chemical requirements and is non-hazardous, and lacks petroleum contamination, the material will be loaded onto trucks for delivery to the Site.

Recycled concrete aggregate (RCA) will be imported from facilities permitted or registered by NYSDEC. Facilities will be identified in the RAR. A PE/QEP is responsible to ensure that the facility is compliant with 6NYCRR Part 360 registration and permitting requirements for the period of acquisition of RCA. RCA imported from compliant facilities will not require additional testing, unless required by NYSDEC under its terms for operation of the facility. RCA imported to the Site must be derived from recognizable and uncontaminated concrete. RCA material is not acceptable for, and will not be used as cover material.

## **1.10 FLUIDS MANAGEMENT**

All liquids to be removed from the Site, including dewatering fluids, will be handled, transported and disposed in accordance with applicable laws and regulations. Liquids discharged into the New York City sewer system will receive prior approval by New York City Department of Environmental Protection (NYC DEP). The NYC DEP regulates discharges to the New York City sewers under Title 15, Rules of the City of New York Chapter 19. Discharge to the New York City sewer system will require an authorization and sampling data demonstrating that the groundwater meets the City's discharge criteria. The dewatering fluid will be pretreated as necessary to meet the NYC DEP discharge criteria. If discharge to the City sewer system is not appropriate, the dewatering fluids will be managed by transportation and disposal at an off-Site treatment facility.

Discharge of water generated during remedial construction to surface waters (i.e. a stream or river) is prohibited without a SPDES permit issued by New York State Department of Environmental Conservation.

## **1.11 STORM-WATER POLLUTION PREVENTION**

Applicable laws and regulations pertaining to storm-water pollution prevention will be addressed during the remedial program. Erosion and sediment control measures identified in this RAWP (silt fences and barriers, and hay bale checks) will be installed around the entire perimeter of the remedial construction area and inspected once a week and after every storm event to ensure that they are operating appropriately. Discharge locations will be inspected to determine whether erosion control measures are effective in preventing significant impacts to receptors. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by OER. All necessary repairs shall be made immediately. Accumulated sediments will be removed as required to keep the barrier and hay bale check functional. Undercutting or erosion of the silt fence toe anchor will be repaired immediately with appropriate backfill materials. Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering.

## **1.12 CONTINGENCY PLAN**

This contingency plan is developed for the remedial construction to address the discovery of unknown structures or contaminated media during excavation. Identification of unknown contamination source areas during invasive Site work will be promptly communicated to OER's Project Manager. Petroleum spills will be reported to the NYS DEC Spill Hotline. These findings will be included in the daily report. If previously unidentified contaminant sources are found during on-Site remedial excavation or development-related excavation, sampling will be performed on contaminated source material and surrounding soils and reported to OER. Chemical analytical testing will be performed for TAL metals, TCL volatiles and semi-volatiles, TCL pesticides and PCBs, as appropriate.

## **1.13 ODOR, DUST AND NUISANCE CONTROL**

### **Odor Control**

All necessary means will be employed to prevent on- and off-Site odor nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) use of foams to cover exposed odorous soils. If odors develop and cannot otherwise be controlled, additional means to eliminate odor nuisances will include: (d) direct load-out of soils to trucks for off-Site disposal; and (e) use of chemical odorants in spray or misting systems.

This odor control plan is capable of controlling emissions of nuisance odors. If nuisance odors are identified, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. OER will be notified of all odor complaint events. Implementation of all odor controls, including halt of work, will be the responsibility of the PE/QEP's certifying the Remedial Action Report.

### **Dust Control**

Dust management during invasive on-Site work will include, at a minimum:

- Use of a dedicated water spray methodology for roads, excavation areas and stockpiles.

- Use of properly anchored tarps to cover stockpiles.
- Exercise extra care during dry and high-wind periods.
- Use of gravel or recycled concrete aggregate on egress and other roadways to provide a clean and dust-free road surface.

This dust control plan is capable of controlling emissions of dust. If nuisance dust emissions are identified, work will be halted and the source of dusts will be identified and corrected. Work will not resume until all nuisance dust emissions have been abated. OER will be notified of all dust complaint events. Implementation of all dust controls, including halt of work, will be the responsibility of the PE/QEP's responsible for certifying the Remedial Action Report.

### **Other Nuisances**

Noise control will be exercised during the remedial program. All remedial work will conform, at a minimum, to NYC noise control standards.

Rodent control will be provided, during Site clearing and grubbing, and during the remedial program, as necessary, to prevent nuisances.

## **APPENDIX 4**

# **VAPOR BARRIER AND ACTIVE DEPRESSURIZATION SYSTEM DESIGN SPECIFICATIONS**

**VAPOR BARRIER AND SUB-SLAB DEPRESSURIZATION SYSTEM DESIGN  
SPECIFICATIONS**

**11-28 31<sup>st</sup> Drive  
E-245: Block 502, Lot 22  
Queens, New York**

**OER Project Number 13EHAZ359Q**

**Prepared for:**

**George Mann  
11-28 31<sup>st</sup> Drive  
Queens, New York 11106  
Morganconstruction1@verizon.net**

## TABLE OF CONTENTS

	<u>Page Number</u>
<b>1.0 Executive Summary</b> .....	<b>1</b>
<b>2.0 Introduction</b> .....	<b>2</b>
2.1 Important Notes for Site Work .....	2
2.2 Standards .....	2
<b>3.0 Vapor Mitigation Efforts</b> .....	<b>3</b>
<b>4.0 Design and Construction Procedures of the Vapor Barrier and SSD Systems</b> .....	<b>4</b>
4.1 Installation the Vapor Barrier System.....	4
4.2 Installation of Active Depressurization System .....	4
4.3 Separate Sub-grade Areas .....	5
4.4 Interaction with Underground Conduits .....	5
4.5 Other Considerations .....	6
<b>5.0 References</b> .....	<b>7</b>

### Figures

1. Plan & Elevation
2. VBS Section Details
3. SSDS Section Details

### Attachments

1. Vapor Barrier Specifications
2. Radon Away G-501 Specifications

## 1.0 EXECUTIVE SUMMARY

The Vapor Barrier and Sub-Slab Depressurization System Design Specifications have been prepared on behalf of Mr. George Man (*"the Client"*) to document the details and protocols for the vapor mitigation of the proposed buildings at 11-28 31<sup>st</sup> Drive (Block 502 and Lot 22) in the Astoria section of Queensx, New York.

These systems have been designed to sustain long-term exposure to contaminants of concern at the Site. The Site has been assigned a New York City Voluntary Cleanup Program ID #13EHAZ359Q by the New York City Mayor's Office of Environmental Remediation (OER).

The proposed development plan includes the construction of a 6-story residential building with a slab on grade and a rear landscaped area. Approximately 62 feet of existing masonry retaining walls on both side of the current building will be maintained and incorporated into the new building. The entire site will be excavated 3 feet below grade surface. The slab on grade will be approximately 6 inches in thickness. The footprint of the building will be approximately 1,550 square feet. An elevator pit approximately 8 feet 8 inches long and 6 feet 8 inches wide will be located in the east-central portion and the building and will extend 5 feet 8 inches below grade surface. Below the elevator shaft a 2-foot thick concrete base will be installed. A landscaped rear yard of approximately 850 square feet is proposed in the southwestern portion of the Site. The depth to water beneath the Site ranges from approximately 8.47 to 10.03 feet.

Prior to pouring the building slab, a 3-inch layer of highly permeable ASTM #5 aggregate consisting of crushed stones will be installed in order to provide an optimal sub-slab communication for the active sub-slab depressurization system (SSDS). In order to eliminated soil vapor-to-indoor air pathway and prevent soil vapors from off-site sources from impacting the interior air of the proposed building, a vapor barrier consisting of a 30-mil GSE HDPE Geomembrane will be installed beneath the building slab on-grade.

Others will install the vapor barrier under the direct oversight of a Hydro Tech Environmental, Corp. (Hydro Tech) Engineer. Hydro Tech will perform a final site inspection and document the installation of the vapor barrier in a Site Closure report which will be will be signed and stamped by a NYS-licensed Professional Engineer and will include pictures of the vapor barrier. The report will be forwarded to the NYCDEP for review and approval.

## 2.0 INTRODUCTION

As a result of volatile organic constituents present in soil vapors beneath the 11-28 31<sup>st</sup> Drive Site located in the Astoria section of Queens, New York, the developer will install an appropriate vapor barrier system (VBS) and sub-slab depressurization system (SSDS) to prevent long term exposure to all contaminants of concern beneath the proposed building slab on-grade. Based upon information provided by the client, the entire Site will be excavated to 3 feet below grade for the layout of column footings and grade beam footings. The proposed building slab will be approximately 6 inches in thickness and will be poured on top of 4-inch layer of masonry sand and 3-inch layer of highly permeable ASTM #5 aggregate consisting of crushed stones. The footprint of the building will be approximately 1,550 square feet. A landscaped rear yard of approximately 850 square feet is proposed in the southwestern portion of the Site.

The written specifications and accompanying engineering plans for the proposed VBS and SSDS complement and supplement each other. The Contractor shall review both of them for sizing and installing the proposed VBS.

These specifications consist of the following Sections:

1. Important Note for Site work – discusses safety issues that are specific to this Site
2. Standards – lists applicable standards for the installation of the vapor barrier
3. System Description – provides a brief overview of the proposed vapor barrier

### 2.1 Important Notes for Site Work

Open flames and smoking are prohibited in the work area.

During construction of the proposed VBS and SSDS, the Contractor shall take all protective measures to ensure the health and safety of all site personnel from potential exposure to semi-volatile compounds and heavy metals detected in the soil beneath the site.

### 2.2 Standards

The American Society for Testing and Materials (ASTM) Standard D2321-89 (re-approved 1995), "Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications," is included here by reference. Unless otherwise stated below, the Contractor shall follow ASTM Standard D2321 during trenching, backfilling and piping construction. This specification is only needed in areas requiring trenching work.

In addition to the above standards, the Contractor shall follow all applicable Federal, State and Local codes, regulations and ordinances pertaining to construction and safety.

The Contractor shall consult with and follow the Engineer's instructions in case any conflicts between these plans/specifications and any of the above standards arise.

### 3.0 VAPOR MITIGATION EFFORTS

1. Based on the information provided by the Client, the proposed building slab will be approximately 6 inches in thickness and will be limited to the building footprint, which is approximately 1,550 square feet. The depth to water beneath the Site ranges from approximately 8.47 to 10.03 feet. The remaining portion of the Site will be undeveloped and will consist of landscaped rear yard of approximately 850 square feet is proposed in the southwestern portion of the Site.
2. A 30-mil GSE HDPE Geomembrane will be installed beneath the building slab on-grade. This sub-slab installation of the membrane will be limited to the footings of the remaining masonry retaining walls on both side of the current building. The VBS design is depicted in the attached drawings and described in these written specifications. The VBS has been designed based on a modular concept for the proposed building footprints and foundations. The concept of VBS design may be easily extended to other different-sized footprints; however, the Design Engineer's prior approval must be obtained in such cases.
3. Prior to pouring the building slab, a 3-inch layer of highly permeable ASTM #5 aggregate will be installed in order to provide an optimal sub-slab communication for the sub-slab depressurization system. The SSDS prevents elevated soil gas levels inside buildings by creating a negative pressure zone beneath the slab. To create this negative pressure zone, a number of SSDS pits will be installed in the aggregates layer under the slab and will be connected to roof-top stack vents and a fan that will actively exhaust air from beneath the slab to the outdoors.

## **4.0 DESIGN AND CONSTRUCTION PROCEDURES OF THE VAPOR BARRIER**

### **4.1 Installation of the Vapor Barrier System**

The essential guidelines for designing and installing the vapor barrier system are listed below:

- A 30-mil GSE HDPE Geomembrane will be installed underneath the building slab on-grade. This membrane will be sealed to the grade beam footings installed at the footings of remaining masonry retaining walls on both side of the current building.
- The HDPE Geomembrane is to be pitched upward from the center of the subject area towards its perimeter at a rate of approximately 1/2" per foot in length direction and 1/4" per foot in width direction to ensure that the membrane will not be inadvertently pitched downward during construction thus ensuring that there will be no pockets of trapped gases under the membrane, and also to provide an additional buoyant pathway for the gases to travel away from the center towards the building perimeter.
- The HDPE membrane will be protected by a geo-textile non-woven fabric (8 oz./sq. yd.) on both sides to prevent tears, and the entire assembly is additionally protected by minimum 2"-thick layers of fine Mason Sand on both sides.
- The HDPE membrane shall be continuous in order to be effective. The membrane shall completely cover the entire building area. Any joints/seams, both lateral and butt should be overlapped 6" and sealed properly in accordance to manufacturer's spec sheets.
- When installing the HDPE Geomembrane, sufficient slack shall be provided in the membrane on all sides when it is underneath the proposed slab so that it will yield at least 2" without tearing if and when any settlement of the slab occurs. Contractor shall follow manufacturer's instructions for proper installation.
- Extreme care shall be taken to ensure that all punctures, penetrations or tears in the material shall be sealed and covered with liquid Bituthene as necessary prior to pouring concrete.

### **4.2 Installation of Sub-Slab Depressurization System**

In order to adequately create a negative pressure zone and effectively extend the negative pressure field beneath the building, a 3-inch layer of highly permeable ASTM #5 aggregate consisting of crushed stones will be placed under the building. A geotextile fabric will be installed beneath the aggregate so that fine material from native soil does not mix with aggregate. The geotextile fabric will also be placed over the aggregate prior to placing the 2 inch sand beneath the vapor barrier.

A total of one (1) sub-slab SSDS pit will be installed beneath the central portions of the proposed development. The pit will provide a direct conduit to the native material beneath the building slab.

The essential guidelines for designing and installing the SSDS are listed below:

- The SSDS pit will consist of a sub-slab cavity of 2 by 2 feet in area by 8 inches in depth. The pit will be installed in the aggregate placed under the vapor barrier. A 4-inch diameter open-ended PVC pipe will be installed in the pit; the bottom end of the pipe will be placed within the sub-slab cavity beneath the VBS. The pipe will be properly sealed with the vapor barrier membrane, in order to provide an airtight seal around the pipe. The PVC pipe will then be attached to extension pipes and connected to roof-top stack vent extending approximately 4 feet above roof of the building and a fan that will actively exhaust air from beneath the slab to the outdoors
- Starting at the floor slab, any openings between the vent pipe and the floor slab should be sealed with a high adhesive sealant like polyurethane. All piping joints shall be sealed. The visible vent pipes shall be labeled as “soil gas vent” and the labels made visible for occupants.
- The PVC pipe from the SSDS pit will be connected to an individual outdoor Radon Away G-501 model fan capable of a suction pressure of 4 inches of H<sub>2</sub>O. The fan will be connected to the individual outdoor exhaust stack extending 4 feet above the roof of the building. The fan will create a negative pressure in the sub-slab environment beneath the building. Based on manufacturer specification, this type of fan can provide coverage up to 2,000 square feet in applications where sub-slab material is compact and communication is poor. At a static suction of 4 inches of H<sub>2</sub>O, this fan can generate a flow of less than 5 cubic feet per minute (CFM). With a proposed discharge stack of at least 4 feet above the rooftop with a maximum flow rate of less 5 CFM, no pollution control will be required for the SSDS. The fan will be mounted on the roof of the building and will be operated via a hand-off-auto switch located on the main control panel. The fan will also be interlocked to individual alarm system to prevent system malfunctioning in the event of mechanical or electrical failure.

**Figure 1** provides the elevation plan. **Figure 2** provide view of section details of pipe penetrations, application of GSE HDPE Geomembrane beneath the building slab. **Figure 3** provides SSDS section details. **Attachment #1** provides Manufacturer’s product sheets and specifications of HDPE geomembrane, geo-textile fabric and liquid Bithutene. **Attachment #2** provides the Radon Away G-501 Specifications.

#### 4.3 Separate Sub-Grade Areas

Concrete block walls connected to below grade areas shall be considered unsealed surfaces. All openings in concrete block walls that will not remain accessible upon completion of the building shall be sealed at both vertical and horizontal surfaces, in order to create continuous air barrier to limit the transport of soil-gas into the indoor air.

#### 4.4 Interaction with Underground Conduits

Examples of utility penetrations through the building slab include water and sewer lines, utility lines to unit ventilators and radiators, electrical service entries, sub-slab conduits, air conditioner condensate drains and roof drains. The openings around these slab penetrations shall be sealed with polyurethane caulk. All unpressurized water and wastewater lines connected to the buildings shall be equipped with house traps (P-traps) to prevent the

migration of gases through them into the building. These lines shall be equipped with vents on the outside of the building, such that the P-traps are located between these vents and the building to which they are connected. These measures are not needed for city water supply lines.




#### 4.5 Other Considerations

1. If any trench construction or excavation is involved in the construction of the VBS, follow trench excavation instructions in ASTM D2321 and other applicable codes, regulations, and standards, including instructions for trench support and sloping as needed. Trench locations shall be clearly separated from the rest of the property with temporary fences, and access to the trench(s) shall be limited to only the workers and related equipment and shall be denied to all others. Construction shall be scheduled such that at the end of each day of work, all trench excavations during that day are backfilled and consolidated, such that the possibility of any human, animal, or equipment falling into the trench(s) or sinking into a loosely backfilled trench is eliminated. The safety practices of the Contractor shall not be limited to those described or specified above; the Contractor shall also take all safety measures and precautions that are necessary for this project depending on project specific conditions. The Contractor is responsible for ensuring the safety of workers, as well as all other people, animals or equipment on Site during all construction activities related to this project, including trench construction.
2. All material used as backfill ("fill") shall be completely free of organic material and free of all extraneous materials such as roots, tree stumps, construction spoils or any other material that would eventually degrade and cause a change in soil volume. Backfill shall also be free of rocks, bricks, nails or any other hard, sharp material that could damage the GSE HDPE Geomembrane.
3. Backfill shall not contain any frozen material and shall not be placed on frozen ground because of significant damage that can occur when the material thaws. Backfill shall be mixed and deposited in a manner as to produce reasonable uniformity throughout the mass.
4. Backfill shall be carefully deposited into the excavation and compacted to form a uniformly, dense and stable mass. Before a new layer of backfill is deposited on a freshly compacted layer, the surface of the compacted layer shall be scarified to enhance mechanical bonding between the surfaces of the two layers.
5. Field inspections must be conducted while construction is in progress.

## 5.0 REFERENCES

1. NYSDOH. 2006. Final – Guidance for Evaluating Soil Vapor Intrusion in the State of New York. New York State Department of Health, Center for Environmental Health, Bureau of Environmental Exposure Investigation.
2. USEPA. 2001. Draft – A Standard EPA Protocol for Characterizing Indoor Air Quality in Large Buildings. U.S. Environmental Protection Agency, Office of Air and Radiation, Washington, DC.
3. USEPA. 1997. Engineering Forum Issue Paper: Soil Vapor Extraction Implementation Experiences, Quick Reference Fact Sheet. U.S. Environmental Protection Agency, Office of Emergency and Remedial Response.
4. USEPA. 1994. Radon Prevention in the Design and Construction of Schools and Other Large Buildings. U.S. Environmental Protection Agency, Office of Research and Development.
5. USEPA. 1993. Radon Reduction Techniques for Existing Detached Houses – Technical Guidance (Third Edition) for Active Soil Depressurization Systems. U.S. Environmental Protection Agency, Office of Environmental Engineering and Technology Demonstration, Office of Research and Development.
6. Grace Waterproofing Systems, September 2010 – Contractor’s Handbook, Grace Construction Products.
7. GSE Geomembranes, Installation Insurance Quality Manual.
8. RadonAway Pproducts; <http://radon.radonaway.com/aboutus.asp>

## FIGURES

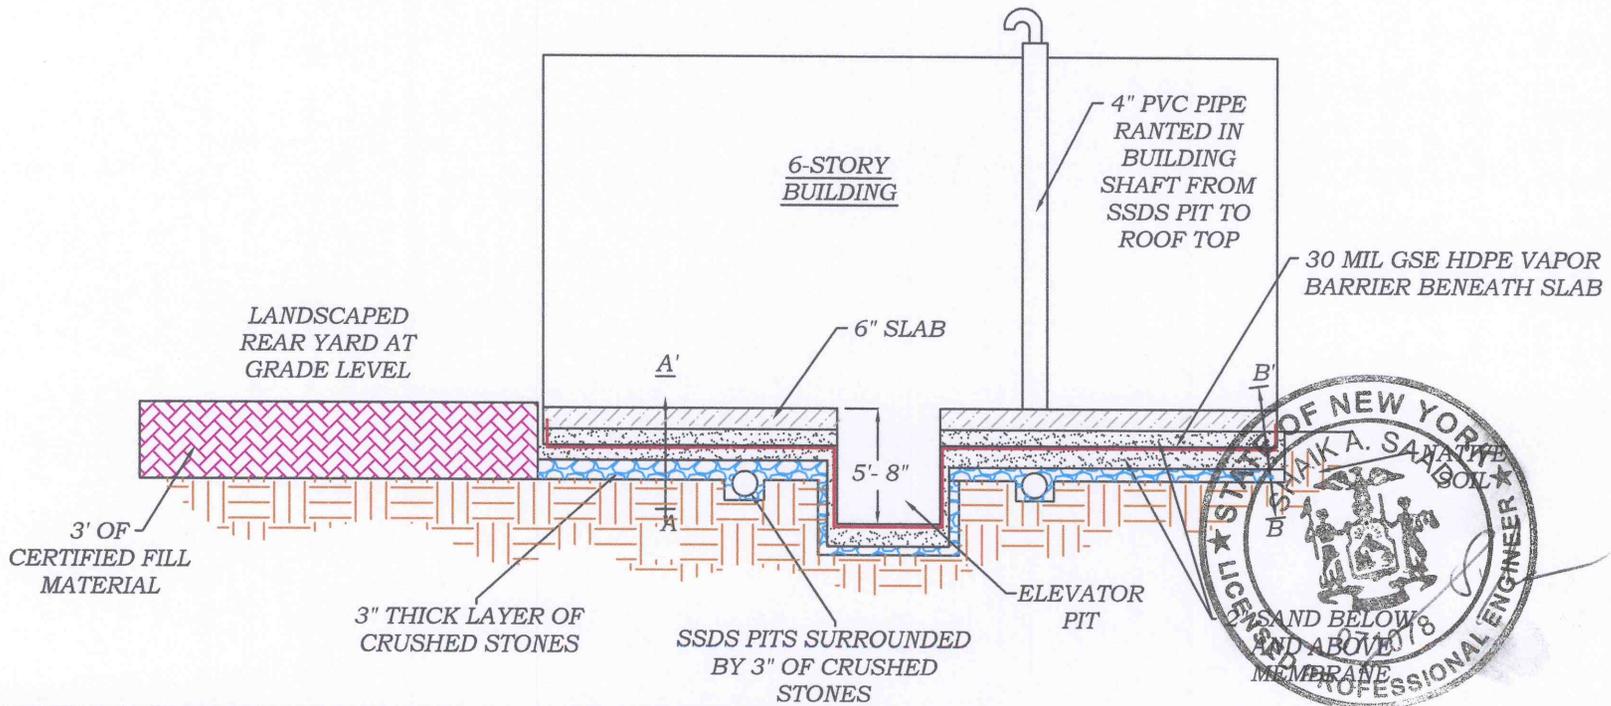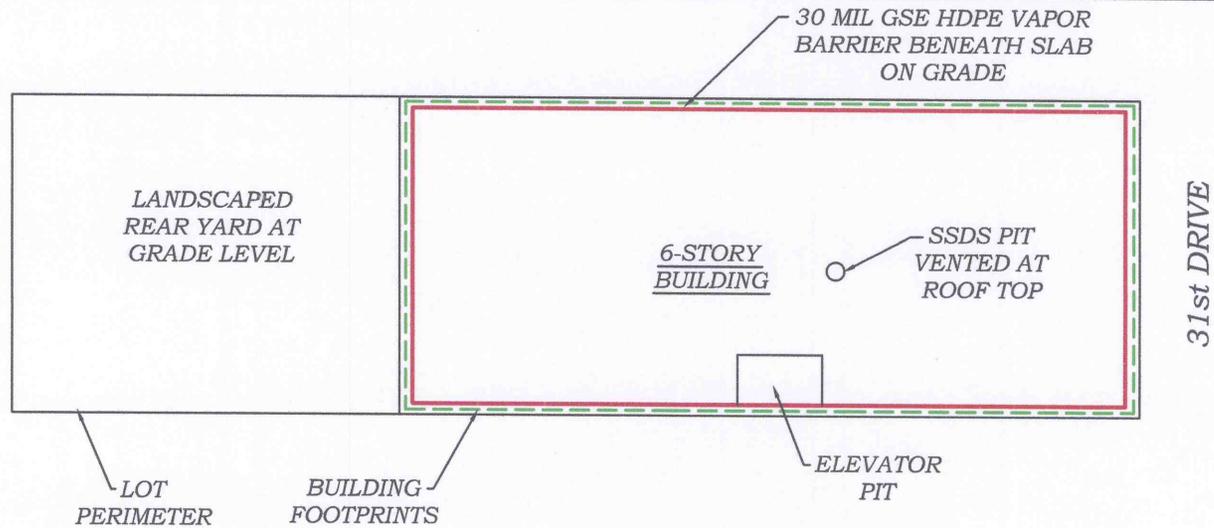


**HYDRO TECH ENVIRONMENTAL CORP.**  
 MAIN OFFICE: 77 ARKAY DRIVE, SUITE G, HAUPPAUGE, NEW YORK 11788  
 NYC OFFICE: 15 OCEAN AVENUE, 2nd Floor, BROOKLYN, NEW YORK 11225  
 T (631)462-5866 F (631)462-5877 T (718)636-0800 F (718)636-0900  
 www.hydrotechenvironmental.com

11-28 31st Drive  
 Long Island City, NY  
 HTE Job# 130030


Drawn By: C.G.  
 Reviewed By: M.R.  
 Approved By: M.S.  
 Date: 06/14/13  
 Scale: AS NOTED

TITLE:


FIGURE 1: PLAN & ELEVATION

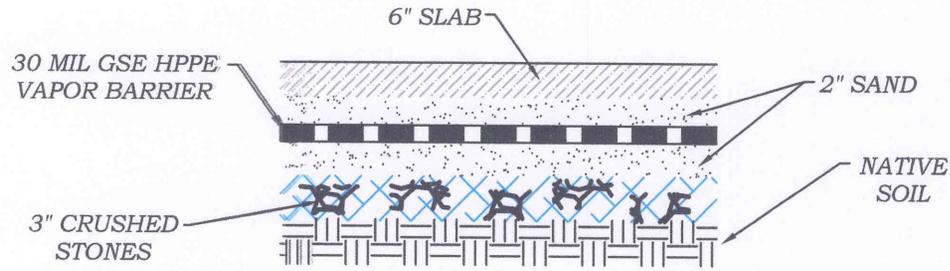

**SECTION DETAIL A - A'**

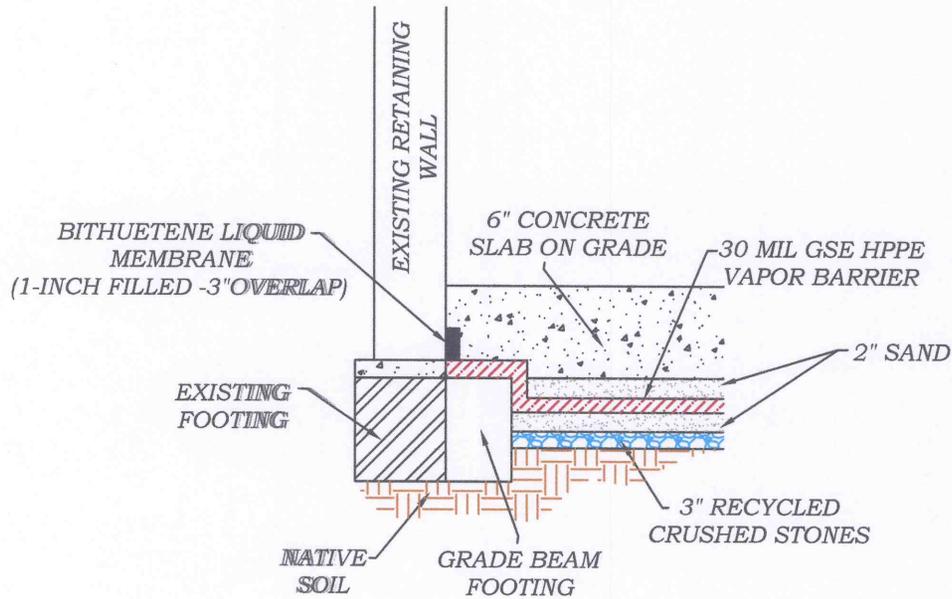

**SECTION DETAIL B - B'**

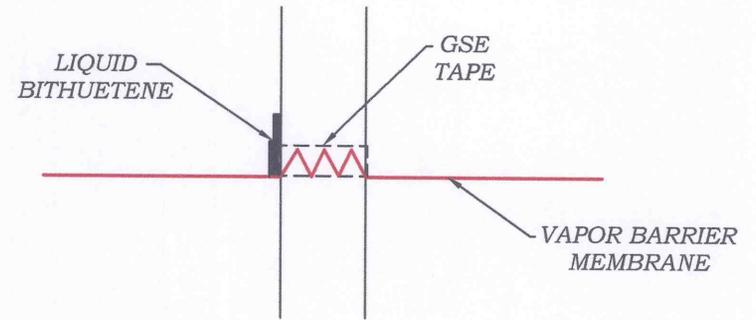

**SECTION DETAIL PIPE PENETRATIONS**



**HYDRO TECH ENVIRONMENTAL CORP.**

MAIN OFFICE:  
77 ARKAY DRIVE, SUITE G  
HAUPPAUGE, NEW YORK 11788  
T (631)462-5866 F (631)462-5877 T (718)636-0800 F (718)636-0900

www.hydrotechenvironmental.com


NYC OFFICE:  
165 ORLEANS AVENUE, 2nd Floor  
BROOKLYN, NEW YORK 11225

11-28 31st Drive  
Long Island City, NY  
HTE Job# 130030

Drawn By: C.O.  
Reviewed By: M.R.  
Approved By: M.S.  
Date: 06/14/13  
Scale: AS NOTED

TITLE:

FIGURE 2: SCHEMATIC SECTION DETAILS OF VAPOR BARRIER

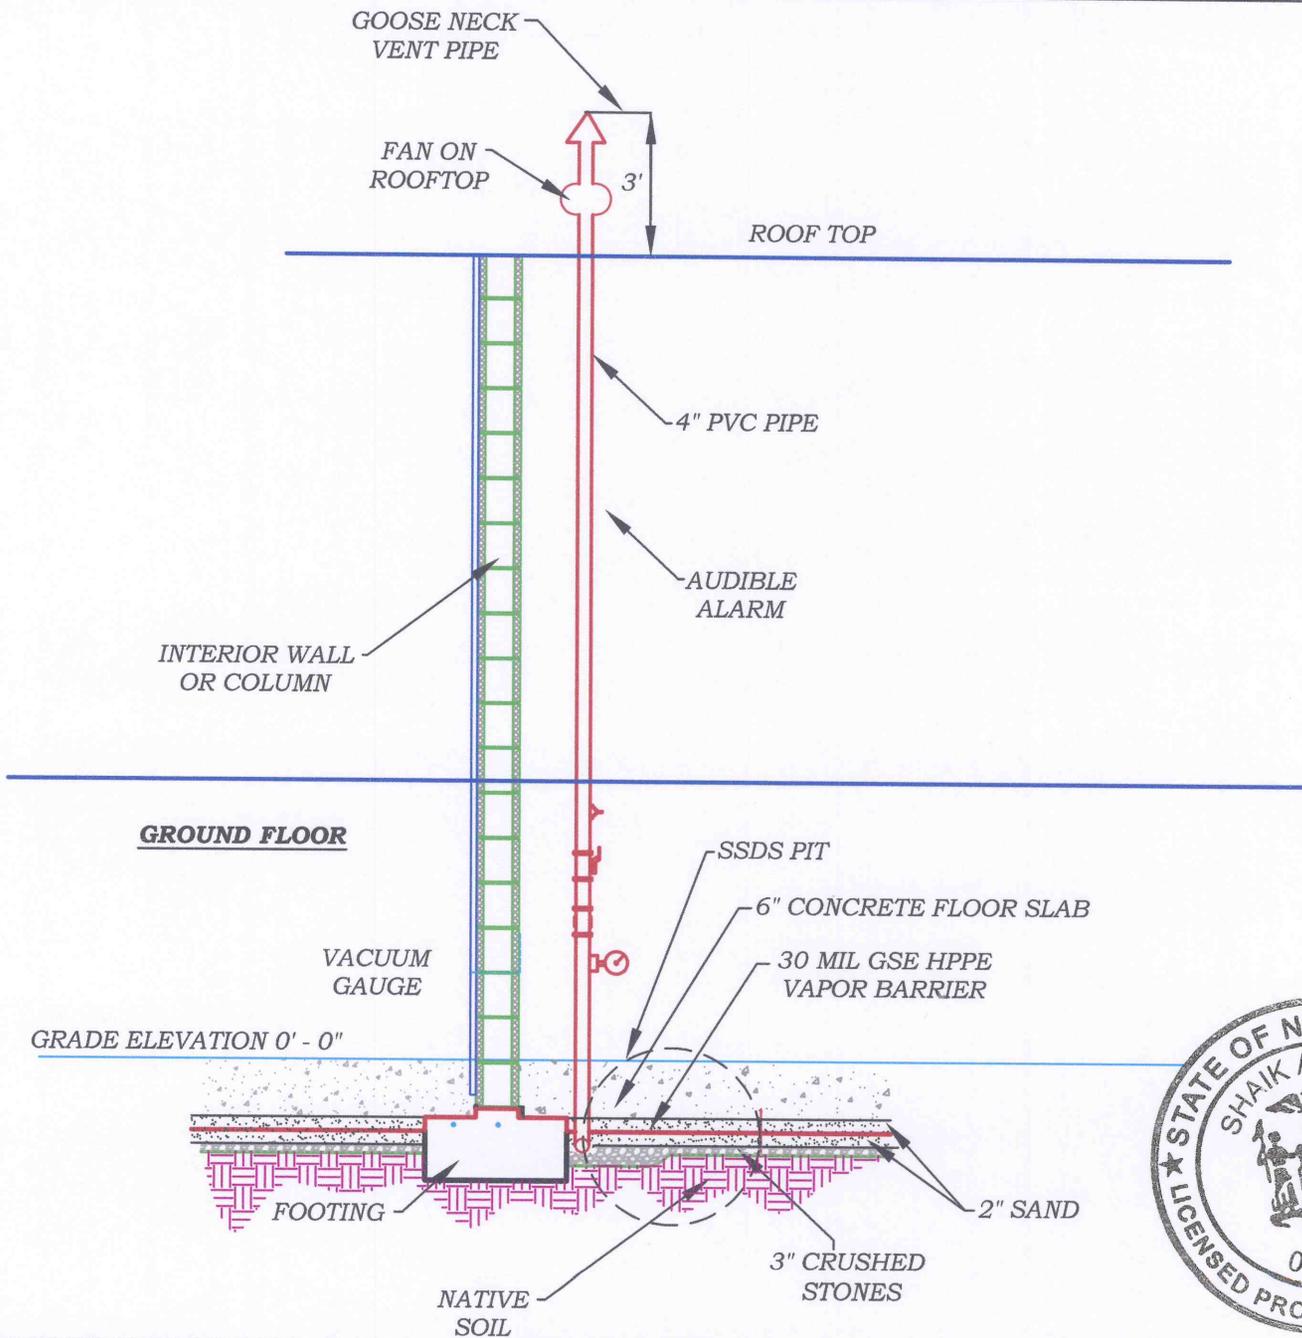

**HYDRO TECH ENVIRONMENTAL CORP.**

**MAIN OFFICE:**  
 77 ARKAY DRIVE, SUITE G  
 HAUPPAUGE, NEW YORK 11788  
 T (631)462-5866 F (631)462-5877  
**NYC OFFICE:**  
 15 OCEAN AVENUE, 2nd Floor  
 BROOKLYN, NEW YORK 11225  
 T (718)636-0800 F (718)636-0900  
[www.hydrotechenvironmental.com](http://www.hydrotechenvironmental.com)

11-28 31st Drive  
 Long Island City, NY  
 HTE Job# 130030

Drawn By: C.O.  
 Reviewed By: M.R.  
 Approved By: M.S.  
 Date: 06/14/13  
 Scale: AS NOTED

TITLE:

FIGURE 3: SUBSLAB DEPRESSURIZATION SYSTEM DETAIL

## ATTACHMENTS

## **ATTACHMENTS 1**

### **VAPOR BARRIER SPECIFICATIONS**

# GSE HD Smooth Geomembrane

GSE HD is a smooth high density polyethylene (HDPE) geomembrane manufactured with the highest quality resin specifically formulated for flexible geomembranes. This product is used in applications that require excellent chemical resistance and endurance properties.



**AT THE CORE:**  
An HDPE geomembrane used in applications that require excellent chemical resistance and endurance properties.

## Product Specifications

These product specifications meet GRI GM 13

Tested Property	Test Method	Frequency	Minimum Average Value				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm <sup>3</sup>	ASTM D 1505	200,000 lb	0.940	0.940	0.940	0.940	0.94
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm  G.L. 2.0 in G.L. 1.3 in	20,000 lb	114 63 700 12	152 84 700 12	228 126 700 12	304 168 700 12	380 210 700 12
Tear Resistance, lb	ASTM D 1004	45,000 lb	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lb	54	72	108	144	180
Carbon Black Content, % (Range)	ASTM D 1603*/4218	20,000 lb	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lb	Note <sup>(1)</sup>	Note <sup>(1)</sup>	Note <sup>(1)</sup>	Note <sup>(1)</sup>	Note <sup>(1)</sup>
Notched Constant Tensile Load, hr	ASTM D 5397, Appendix	200,000 lb	300	300	300	300	300
Oxidative Induction Time, mins	ASTM D 3895, 200°C; O <sub>2</sub> , 1 atm	200,000 lb	>100	>100	>100	>100	>100
<b>TYPICAL ROLL DIMENSIONS</b>							
Roll Length <sup>(2)</sup> , ft			1,120	870	560	430	340
Roll Width <sup>(2)</sup> , ft			22.5	22.5	22.5	22.5	22.5
Roll Area, ft <sup>2</sup>			25,200	19,575	12,600	9,675	7,650

NOTES:

- <sup>(1)</sup>Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
- <sup>(2)</sup>Roll lengths and widths have a tolerance of ±1%.
- GSE HD is available in rolls weighing approximately 3,900 lb.
- All GSE geomembranes have dimensional stability of ±2% when tested according to ASTM D 1204 and LTB of <-77°C when tested according to ASTM D 746.
- \*Modified.

GSE is a leading manufacturer and marketer of geosynthetic lining products and services. We've built a reputation of reliability through our dedication to providing consistency of product, price and protection to our global customers.

Our commitment to innovation, our focus on quality and our industry expertise allow us the flexibility to collaborate with our clients to develop a custom, purpose-fit solution.



**[ DURABILITY RUNS DEEP ]** For more information on this product and others, please visit us at [GSEworld.com](http://GSEworld.com), call 800.435.2008 or contact your local sales office.

**Nonwoven Geotextile Property Table – English Values**

PROPERTY	TEST METHOD	UNIT	VALUE	311	351	<u>401</u>	451	501	<u>601</u>	701	<u>801</u>	1001	1201	1601
<b>MECHANICAL</b>														
Grab Tensile Strength	ASTM D-4632	lb	MARV	80	95	115	120	150	160	180	205	250	300	380
Grab Elongation	ASTM D-4632	%	MARV	50	50	50	50	50	50	50	50	50	50	50
Puncture Strength	ASTM D-4833	lb	MARV	50	55	65	65	85	85	100	110	150	175	240
Mullen Burst	ASTM D-3786	psi	MARV	150	185	210	230	280	280	330	350	460	580	750
Trapezoidal Tear	ASTM D-4533	lb	MARV	30	40	50	50	60	60	75	85	100	115	150
<b>HYDRAULIC</b>														
Apparent Opening Size (AOS)	ASTM D-4751	US Sieve	MaxARV	50	50	70	70	70	70	70	80	100	100	100
Permittivity	ASTM D-4491	sec <sup>-1</sup>	MARV	2.0	2.0	2.0	1.5	1.4	1.3	1.5	1.5	1.2	1.0	0.7
Permeability	ASTM D-4491	cm/sec	MARV	0.22	0.25	0.22	0.22	0.23	0.24	0.34	0.38	0.30	0.29	0.27
Water Flow Rate	ASTM D-4491	gpm/ft <sup>2</sup>	MARV	150	150	140	120	115	110	110	110	85	75	50
<b>PHYSICAL</b>														
Mass per Unit Area	ASTM D-5261	oz/yd <sup>2</sup>	MARV	2.7	3.0	3.5	4.0	4.8	5.0	5.9	6.5	8.5	10.8	15.0
Thickness	ASTM D-5199	mils	MARV	30	40	50	45	55	60	70	70	100	105	145
<b>ENDURANCE</b>														
UV Resistance	ASTM D-4355	% Retained @ 500 hours	MARV	70	70	70	70	70	70	70	70	70	70	70
<b>STANDARD PACKAGING</b>														
Roll Width	Measured	feet	Typical	15	15	15	15	15	15	15	15	15	15	15
Roll Length	Measured	feet	Typical	360	360	360	360	360	360	360	360	300	300	300
Roll Area	Calculated	yd <sup>2</sup>	Typical	600	600	600	600	600	600	600	600	500	500	500

**NOTES**

- The property values listed are effective 2/01/2004 and are subject to change without notice.
- Values reported in weaker principle direction.
- All values listed are minimum average roll values (MARV) unless otherwise noted, calculated as the typical minus two standard deviations. Statistically, it yields a 97.7% degree of confidence that any sample taken during quality assurance testing will exceed the value reported. MaxARV represents typical plus two standard deviations.
- Underlined styles meet and/or exceed the American Association of State Highway Transportation Officials (AASHTO) M288 specifications.

## BITUTHENE® LIQUID MEMBRANE

Two component, elastomeric, liquid applied detailing compound for use with Grace waterproofing membranes

### Description

Bituthene® Liquid Membrane is a two component, elastomeric, cold applied, trowel grade material designed for a variety of uses with the Grace waterproofing systems. The VOC (Volatile Organic Compound) content is 10 g/L.

Architectural and Industrial Maintenance Regulations limit the VOC content in products classified as Architectural Coatings. Refer to Technical Letters at [www.graceconstruction.com](http://www.graceconstruction.com) for most current list of allowable limits.

### Advantages

- **Liquid applied**—conforms to irregular profiles
- **Waterproof**—resistant to water vapor and water pressure
- **Tough, rubber-like**—flexible and damage resistant
- **Chemically cured**—unaffected by in-service temperature variations
- **Cold applied**—no flame hazard
- **System compatible**—formulated for use with Grace waterproofing membrane systems

### Use

Bituthene Liquid Membrane is ideally suited for the following uses:


- Fillet material at inside corners
- Reinforcement material at inside corners

- Flashing material around drains, protrusions, curbs and parapets
- Sealing material at terminations
- Repair material for defects on concrete surfaces
- Flashing material at corners

The two parts of Bituthene Liquid Membrane are mixed on site and troweled on to provide a simple and quick waterproofing detailing aid in conjunction with Bituthene, Preprufe® and Procor® systems.

### Compatibility

Bituthene Liquid Membrane is completely compatible with Bituthene, Preprufe and Procor, and with existing asphalt or coal tar-based waterproofing materials. It is also compatible with cured silicone and polyurethane sealants. It is not compatible with creosote, pentachlorophenol, linseed oil or polysulfide-based sealants.

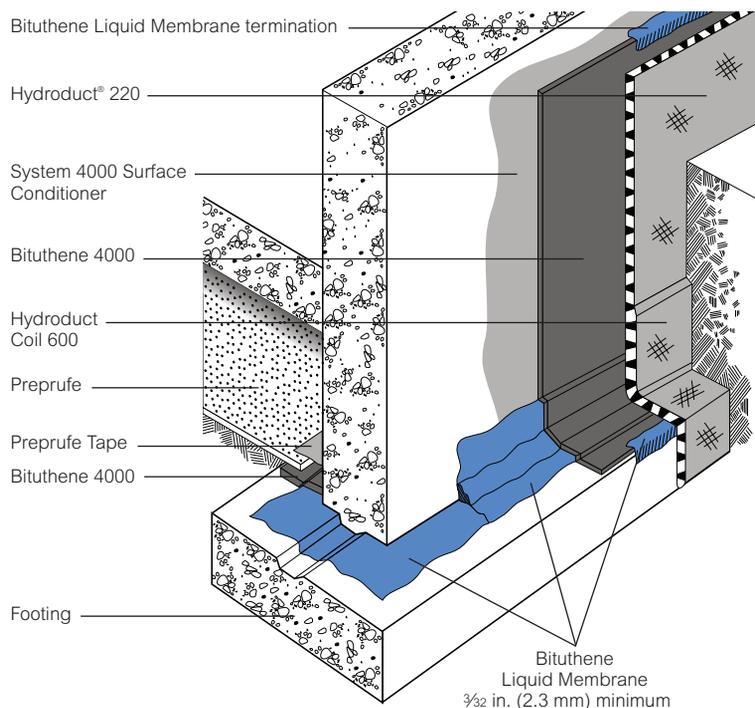

Drawings are for illustration purposes only. Please refer to [www.graceconstruction.com](http://www.graceconstruction.com) for specific application details.

### Product Advantages

- Liquid applied
- Waterproof
- Tough, rubber-like
- Chemically cured
- Cold applied
- System compatible

## Supply

Bituthene Liquid Membrane (Parts A & B)		
Unit size	1.5 gal (5.7 L)	4 gal (15.1 L)
Weight per unit	16 lbs (8 kg)	44 lbs (20 kg)
Units per pallet	100	24

## Physical Properties

Property	Typical Value	Test Method
Color		
Part A	Black	
Part B	Clear	
Mixture of Parts A and B	Black	
Solids content	100%	ASTM D1644
Elongation	250% minimum	ASTM D412
Peel strength	5 lbs/in. (880 N/m) minimum	ASTM D903
Flexibility, 180° bend over 1 in. (25 mm) mandrel at -25°F (-32°C)	Unaffected	ASTM D1970

## Application Procedures

### Safety, Storage and Handling Information

Bituthene products must be handled properly. Vapors from solvent-based primers and mastic are harmful and flammable. For these products, the best available information on safe handling, storage, personal protection, health and environmental considerations has been gathered. Material Safety Data Sheets (MSDS) are available at [www.graceconstruction.com](http://www.graceconstruction.com) and users should acquaint themselves with this information. Carefully read detailed precaution statements on product labels and the MSDS before use.

### Surface Preparation

All surfaces must be dry and free from dirt, grease, oil, dust or other contaminants. Bituthene Liquid Membrane may be applied at temperatures of 25°F (-4°C) or above. Below 40°F (5°C), store in a warm place before application.

### Mixing

Add the entire contents of the Part B container to Part A and mix for 3 to 5 minutes until uniform. Part A is black and Part B is clear. Take care to scrape material from the side and bottom of the containers to assure thorough mixing. A low speed (150 rpm) mechanical mixer with flat paddle blades is required. Do not apply any material if streaks can be seen due to insufficient mixing.

Once mixed, Bituthene Liquid Membrane must be applied by trowel within 1.5 hours. More time is available at lower temperatures. At high temperatures, thickening and curing will be faster. Material that has thickened must be discarded. The material will cure to a very flexible rubber-like material.

Bituthene Liquid Membrane must be applied at a minimum thickness of  $\frac{3}{32}$  in. (2.3 mm) unless otherwise noted on details. In fillet applications, the face of the fillet should be a minimum of  $\frac{3}{4}$  in. (20 mm). In corner flashing application details, it should extend 6 in. (150 mm) in each direction from the corner. Bituthene Liquid Membrane will adhere to primed or unprimed concrete.

Bituthene Liquid Membrane should be allowed to cure at least 24 hours before flood testing.

### Coverage

As a fillet material, 1 gal (3.8 L) will cover approximately 100 linear feet (30 m). As a flashing material, 1 gal (3.8 L) will cover approximately 17 ft<sup>2</sup> (1.6 m<sup>2</sup>). As a fillet and reinforcement, 1 gal (3.8 L) will cover approximately 14 linear feet (4.3 m).

### Cleaning

Clean tools and equipment with mineral spirits before Bituthene Liquid Membrane has cured. Mineral spirits is a combustible liquid and should be used only in accordance with the manufacturer's safety recommendations. Do not use solvents to clean hands or skin.

[www.graceconstruction.com](http://www.graceconstruction.com)

For technical assistance call toll free at 866-333-3SBM (3726)

Bituthene, Hydroduct and Preprufe are registered trademarks of W. R. Grace & Co.-Conn. Procor is a U.S. registered trademark of W. R. Grace & Co.-Conn., and is used in Canada under license from PROCOR LIMITED.

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would infringe any patent or copyright. W. R. Grace & Co.-Conn., 62 Whittemore Avenue, Cambridge, MA 02140. In Canada, Grace Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

This product may be covered by patents or patents pending.  
BIT-230D Printed in USA 3/07

Copyright 2007. W. R. Grace & Co.-Conn.  
FA/LI/1M

GRACE

## **ATTACHMENTS 2**

### **RADON AWAY G-501 SPECIFICATIONS**



**INSTALLATION INSTRUCTION IN014 Rev G**

DynaVac - XP/XR Series		DynaVac - GP Series	
XP101	p/n 23008-1	GP201	p/n 23007-1
XP151	p/n 23010-1	GP301	p/n 23006-1
XP201	p/n 23011-1	GP401	p/n 23009-1
XR261	p/n 23019-1	GP501	p/n 23005-1

**1.0 SYSTEM DESIGN CONSIDERATIONS**

**1.1 INTRODUCTION**

The DynaVac GP/XP/XR Series Radon Fans are intended for use by trained, professional Radon mitigators. The purpose of this instruction is to provide additional guidance for the most effective use of a DynaVac Fan. This instruction should be considered as a supplement to EPA standard practices, state and local building codes and state regulations. In the event of a conflict, those codes, practices and regulations take precedence over this instruction.

**1.2 ENVIRONMENTALS**

The GP/XP/XR Series Fans are designed to perform year-round in all but the harshest climates without additional concern for temperature or weather. For installations in an area of severe cold weather, please contact RadonAway for assistance. When not in operation, the fan should be stored in an area where the temperature is never less than 32 degrees F. or more than 100 degrees F.

**1.3 ACOUSTICS**

The GP/XP/XR Series Fan, when installed properly, operates with little or no noticeable noise to the building occupants. The velocity of the outgoing air should be considered in the overall system design. In some cases the "rushing" sound of the outlet air may be disturbing. In these instances, the use of a RadonAway Exhaust Muffler is recommended.

**1.4 GROUND WATER**

In the event that a temporary high water table results in water at or above slab level, water may be drawn into the riser pipes thus blocking air flow to the GP/XP/XR Series Fan. The lack of cooling air may result in the fan cycling on and off as the internal temperature rises above the thermal cutoff and falls upon shutoff. Should this condition arise, it is recommended that the fan be turned off until the water recedes allowing for return to normal operation.

**1.5 SLAB COVERAGE**

The GP/XP/XR Series Fan can provide coverage up to 2000+ sq. ft. per slab penetration. This will primarily depend on the sub-slab material in any particular installation. In general, the tighter the material, the smaller the area covered per penetration. Appropriate selection of the GP/XP/XR Series Fan best suited for the sub-slab material can improve the slab coverage. The GP & XP series have a wide range of models to choose from to cover a wide range of subslab material. The higher static suction fans are generally used for tighter subslab materials. The XR Series is specifically designed for high flow applications such as stone/gravel and drain tile. Additional suction points can be added as required. It is recommended that a small pit (5 to 10 gallons in size) be created below the slab at each suction hole.

**1.6 CONDENSATION & DRAINAGE**

Condensation is formed in the piping of a mitigation system when the air in the piping is chilled below its dew point. This can occur at points where the system piping goes through unheated space such as an attic, garage or outside. The system design must provide a means for water to drain back to a slab hole to remove the condensation. The GP/XP/XR Series Fan **MUST** be mounted vertically plumb and level, with the outlet pointing up for proper drainage through the fan. Avoid mounting the fan in any orientation that will allow water to accumulate inside the fan housing. The GP/XP/XR Series Fans are **NOT** suitable for underground burial.

For GP/XP/XR Series Fan piping, the following table provides the minimum recommended pipe diameter and pitch under several system conditions.

Pipe Dia.	Minimum Rise per Foot of Run*		
	@25 CFM	@50 CFM	@100 CFM
4"	1/8"	1/4"	3/8"
3"	1/4"	3/8"	1 1/2"




\*Typical GP/XP/XR Series Fan operational flow rate is 25 - 90 CFM. (For more precision, determine flow rate by using the chart in the addendum.)

Under some circumstances in an outdoor installation a condensate bypass should be installed in the outlet ducting as shown. This may be particularly true in cold climate installations which require long lengths of outlet ducting or where the outlet ducting is likely to produce large amounts of condensation because of high soil moisture or outlet duct material. Schedule 20 piping and other thin-walled plastic ducting and Aluminum downspout will normally produce much more condensation than Schedule 40 piping.

The bypass is constructed with a 45 degree Wye fitting at the bottom of the outlet stack. The bottom of the Wye is capped and fitted with a tube that connects to the inlet piping or other drain. The condensation produced in the outlet stack is collected in the Wye fitting and drained through the bypass tube. The bypass tubing may be insulated to prevent freezing.

**1.7 "SYSTEM ON" INDICATOR**

A properly designed system should incorporate a "System On" Indicator for affirmation of system operation. A manometer, such as a U-Tube, or a vacuum alarm is recommended for this purpose.

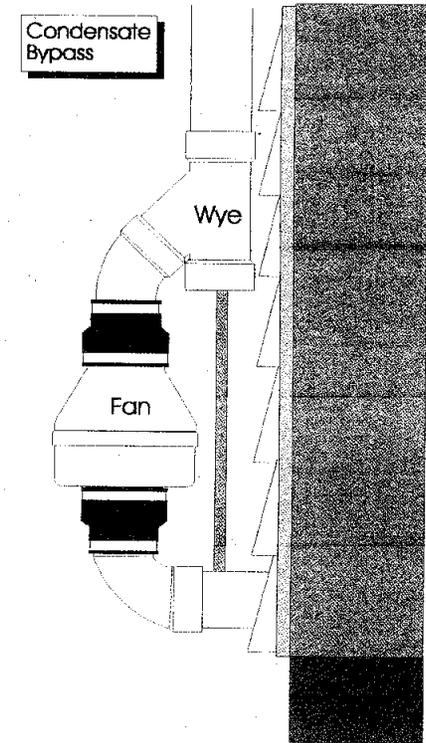

## 1.8 ELECTRICAL WIRING

The GP/XP/XR Series Fans operate on standard 120V 60 Hz. AC. All wiring must be performed in accordance with the National Fire Protection Association's (NFPA) National Electrical Code, Standard #70<sup>th</sup> -current edition for all commercial and industrial work, and state and local building codes. All wiring must be performed by a qualified and licensed electrician. Outdoor installations require the use of a U.L. listed watertight conduit. Ensure that all exterior electrical boxes are outdoor rated and properly sealed to prevent water penetration into the box. A means, such as a weep hole, is recommended to drain the box.


## 1.9 SPEED CONTROLS

The GP/XP/XR Series Fans are rated for use with electronic speed controls ,however, they are generally not recommended.

## 2.0 INSTALLATION

The GP/XP/XR Series Fan can be mounted indoors or outdoors. (It is suggested that EPA recommendations be followed in choosing the fan location.) The GP/XP/XR Series Fan may be mounted directly on the system piping or fastened to a supporting structure by means of optional mounting bracket.

### Typical GP/XP/XR Outdoor Installation

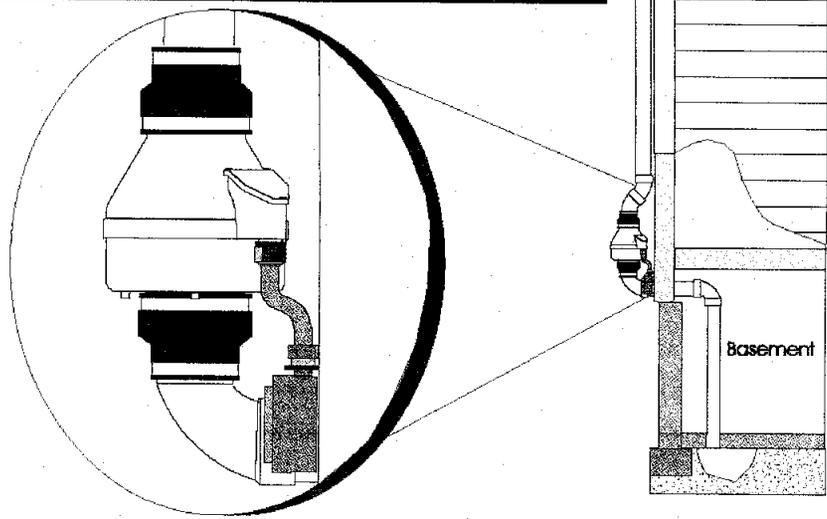

## 2.1 MOUNTING

Mount the GP/XP/XR Series Fan vertically with outlet up. Insure the unit is plumb and level. When mounting directly on the system piping assure that the fan does not contact any building surface to avoid vibration noise.

## 2.2 MOUNTING BRACKET (optional)

The GP/XP/XR Series fan may be optionally secured with the integral mounting bracket on the GP Series fan or with RadonAway P/N 25007-2 mounting bracket for an XP/XR Series fan. Foam or rubber grommets may also be used between the bracket and mounting surface for vibration isolation.

## 2.3 SYSTEM PIPING

Complete piping run, using flexible couplings as means of disconnect for servicing the unit and vibration isolation.

## 2.4 ELECTRICAL CONNECTION

Connect wiring with wire nuts provided, observing proper connections(See Section 1.8):


Fan Wire	Connection
Green	Ground
Black	AC Hot
White	AC Common

## 2.5 VENT MUFFLER (optional)

Install the muffler assembly in the selected location in the outlet ducting. Solvent weld all connections. The muffler is normally installed at the end of the vent pipe.

## 2.6 OPERATION CHECKS

- \_\_\_ Verify all connections are tight and leak-free.
- \_\_\_ Insure the GP/XP/XR Series Fan and all ducting is secure and vibration-free.
- \_\_\_ Verify system vacuum pressure with manometer. Insure vacuum pressure is less than maximum recommended operating pressure  
(Based on sea-level operation, at higher altitudes reduce by about 4% per 1000 Feet.)  
(Further reduce Maximum Operating Pressure by 10% for High Temperature environments)  
See Product Specifications. If this is exceeded, increase the number of suction points.
- \_\_\_ Verify Radon levels by testing to EPA protocol.

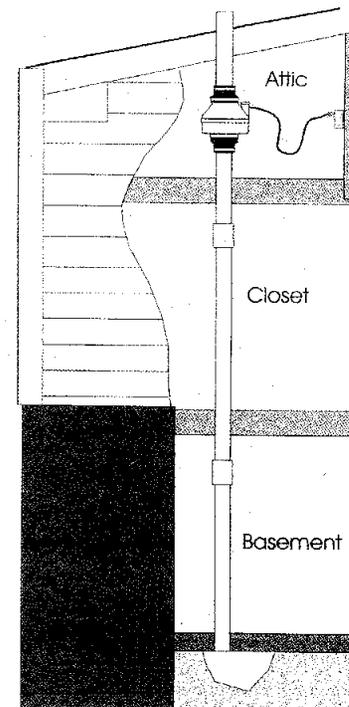

**XP/XR SERIES PRODUCT SPECIFICATIONS**

The following chart shows fan performance for the XP & XR Series Fan:

	Typical CFM Vs Static Suction "WC								
	0"	.25"	.5"	.75"	1.0"	1.25"	1.5"	1.75"	2.0"
XP101	125	118	90	56	5	-	-	-	-
XP151	180	162	140	117	78	46	10	-	-
XP201	150	130	110	93	74	57	38	20	-
XR261	250	215	185	150	115	80	50	20	-

Maximum Recommended Operating Pressure*		
XP101	0.9" W.C.	(Sea Level Operation)**
XP151	1.3" W.C.	(Sea Level Operation)**
XP201	1.7" W.C.	(Sea Level Operation)**
XR261	1.6" W.C.	(Sea Level Operation)**

\*Reduce by 10% for High Temperature Operation  
\*\*Reduce by 4% per 1000 feet of altitude

Power Consumption @ 120 VAC	
XP101	40 - 49 watts
XP151	45 - 60 watts
XP201	45 - 66 watts
XR261	65 - 105 watts

- XP Series Inlet/Outlet: 4.5" OD (4.0" PVC Sched 40 size compatible)
- XR Series Inlet/Outlet: 5.875" OD
- Mounting: Mount on the duct pipe or with optional mounting bracket.
- Recommended ducting: 3" or 4" Schedule 20/40 PVC Pipe
- Storage temperature range: 32 - 100 degrees F.
- Normal operating temperature range: -20 - 120 degrees F.
- Maximum inlet air temperature: 80 degrees F.
- Size: 9.5H" x 8.5" Dia.      Weight: 6 lbs. (XR261 - 7 lbs)
- Continuous Duty      Thermally protected
- Class B Insulation      3000 RPM
- Residential Use Only      Rated for Indoor or Outdoor use



**GP SERIES PRODUCT SPECIFICATIONS**

The following chart shows fan performance for the GPx01 Series Fan:

	Typical CFM Vs Static Suction "WC						
	1.0"	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"
GP501	95	87	80	70	57	30	5
GP401	93	82	60	38	12	-	-
GP301	92	77	45	10	-	-	-
GP201	82	58	5	-	-	-	-

Maximum Recommended Operating Pressure*		
GP501	3.8" W.C.	(Sea Level Operation)**
GP401	3.0" W.C.	(Sea Level Operation)**
GP301	2.4" W.C.	(Sea Level Operation)**
GP201	1.8" W.C.	(Sea Level Operation)**

\*Reduce by 10% for High Temperature Operation  
\*\*Reduce by 4% per 1000 feet of altitude

Power Consumption @ 120 VAC	
GP501	70 - 140 watts
GP401	60 - 110 watts
GP301	55 - 90 watts
GP201	40 - 60 watts

- Inlet/Outlet: 3.5" OD (3.0" PVC Sched 40 size compatible)
- Mounting: Fan may be mounted on the duct pipe or with integral flanges.
- Weight: 12 lbs.
- Size: 13H" x 12.5" x 12.5"
- Recommended ducting: 3" or 4" Schedule 20/40 PVC Pipe
- Storage temperature range: 32 - 100 degrees F.
- Normal operating temperature range: -20 - 120 degrees F.
- Maximum inlet air temperature: 80 degrees F.
- Continuous Duty
- Class B Insulation
- 3000 RPM
- Thermally protected
- Rated for Indoor or Outdoor Use



**APPENDIX 5**

**HEALTH AND SAFETY PLAN**

# CONSTRUCTION HEALTH & SAFETY PLAN

11-28 31<sup>st</sup> Drive  
E-245: Block 502, Lot22  
Queens, New York

OER Project Number 13EHAZ359Q

## Table of Contents

1.0 Introduction.....	2
2.0 Scope of Work .....	2
3.0 Staffing .....	3
4.0 Chemical & Waste Description/Characterization .....	4
5.0 Hazard Assessment.....	6
6.0 Spill Prevention and Control Plan.....	7
7.0 Training.....	8
8.0 Medical Surveillance .....	9
9.0 Site Control, PPE & Communications .....	9
10.0 Air Monitoring Plan .....	11
11.0 Safety Considerations .....	12
12.0 Decontamination and Disposal Procedures.....	14
13.0 Emergency Plan .....	16
14.0 Logs, Reports and Record Keeping.....	18
15.0 Sanitation .....	19

## Figures

1. Directions to Hospital

## Attachments

- A. Health and Safety Fact Sheets

## **1.0 INTRODUCTION**

This Construction Health & Safety Plan (CHASP) has been prepared by Hydro Tech Environmental, Corp. (Hydro Tech) as a part of the Remedial Action Work Plan (RAWP) for 11-28 31<sup>st</sup> Drive (Block 502, Lot 22) and situated at in the borough of Queens, New York.

This CHASP will conform to applicable regulations, safe work practices and the project's requirements, and addresses those activities associated with the development of a 6-story residential building with a slab-on grade and a landscaped rear yard.

The Hydro Tech Project Manager (PM), Site Safety Officer (SSO) and field staff (when necessary) will implement the Plan during construction. Compliance with this HASP is required of all persons and third parties who perform the scope of work documented for this project. Assistance in implementing this CHASP can be obtained from the SSO. The content of this CHASP may change or undergo revisions based upon additional information that is made available to health and safety personnel, monitoring results, or changes in the technical scope of work.

It should be noted that this CHASP does not apply to any other scopes of work that may be performed at the Site that are not specifically outlined in this report. Through preparation of this HASP, Hydro Tech and all Subcontractors (if any) do not guarantee the health or safety of any person entering this Site. Due to the nature of this Site and the activities occurring thereon, it is not possible to discover, evaluate and provide protection for all possible hazards that may be encountered. Only those portions of this CHASP that specifically apply to the activities at the Site will be enacted by authorized personnel of Hydro Tech. Strict adherence to the applicable portions of these health and safety guidelines set forth herein will reduce, but not eliminate the potential for injury at this Site. The health and safety guidelines in this CHASP were prepared specifically for this Site and should not be utilized for any other site without prior research and evaluation by trained health and safety specialists and approval by Hydro Tech.

## **2.0 SCOPE OF WORK**

This Construction HASP has been prepared as a part of the RAWP to be implemented during the upcoming development of the Site. Prior environmental assessments identified Volatile Organic Compounds (VOCs), Semi-Volatile Organic Compounds (SVOCs) and Metals including lead in groundwater and soil/fill beneath the Site at concentrations exceeding their respective Unrestricted Use Soil Cleanup Objectives (SCOs). A range of vapors associated with organic solvents and petroleum constituents were also detected beneath the Site.

The portions of the construction activities specifically addressed in this Construction HASP will include the following and will be performed in the following sequence:

- Supervision of the excavation of soil/fill and other material
- Supervision of the installation of concrete foundations
- Supervision of the installation of vapor barrier and active sub-slab depressurization system

Prior to any fieldwork, the New York City One-Call Unit will be contacted so that all public utilities can be marked out. The proposed schedule of fieldwork will be coordinated with the developer and the OER.

### 3.0 STAFFING

This section briefly describes the personnel involved in Site remedial activities, their contact information and their health and safety responsibilities. This section also provides directions to hospital in the case of a health emergency.

#### EMERGENCY NUMBERS

<u>Contact</u>	<u>Phone Number</u>
Mount Sinai Hospital	(718) 932-6000
New York City EMS	911
NYPD	911
NYFD	911
National Response Center	(800) 424-8802
Poison Information Center	(800) 562-8816
Chemtree	(800) 424-9555

#### Site Contacts

<u>Title</u>	<u>Contact</u>	<u>Phone Number</u>
Site Manager	Timothy Li	347-838-0846
Site Supervisor	George Mann	212-625-0820
Site Emergency	George Mann	212-625-0820

#### Project Management/Health and Safety Personnel

<u>Title</u>	<u>Contact</u>	<u>Phone Number</u>	<u>Cell Phone</u>
Geologist	Rachel Ataman	(631) 462-5866	(631) 457-0032
Site Safety Officer	Paul I. Matli	(718) 636-0800	(631) 241-7264
Project Manager	Paul I. Matli	(718) 636-0800	(631) 241-7165

#### Directions To Mount Sinai Hospital (See Attached Figure 1)

Upon leaving the Site, start going southeast on 31<sup>st</sup> Drive Avenue toward 12<sup>th</sup> Street. Turn right at the third cross street onto 21<sup>st</sup> Street and then turn right onto 30<sup>th</sup> Avenue. The hospital will be on the right side.

#### PROJECT MANAGER

As necessary, the Project Manager will perform the following:

- Has the overall responsibility for the health and safety of site personnel
- Ensures that adequate resources are provided to the field staff to carry out their responsibilities as outlined below.
- Ensures that fieldwork is scheduled with adequate personnel and equipment resources to complete the job in a safe manner.
- Ensures that adequate communication between field crews and emergency response personnel is maintained.
- Ensures that field site personnel are adequately trained and qualified to work at the Site.

## **SITE SAFETY OFFICER**

As necessary, the Site Safety Officer will perform the following:

- Directs and coordinates health and safety monitoring activities.
- Ensures that field teams utilize proper personal protective equipment (PPE).
- Conducts initial on-Site, specific training prior to personnel and/or subcontractors proceeding to work.
- Conducts and documents periodic safety briefings; ensures that field team members comply with this Construction HASP.
- Completes and maintains Accident/Incident Report Forms.
- Notifies corporate administration of all accidents/incidents.
- Determines upgrade or downgrade of PPE based on site conditions and/or downgrade of PPE based on site conditions and/or real-time monitoring results.
- Ensures that monitoring instruments are calibrated daily or as determined by manufacturer's suggested instructions.
- Maintains health and safety field log books.
- Develops and ensures implementation of the Construction HASP.
- Approves revised or new safety protocols for field operations.
- Coordinates revisions of this Construction HASP with field personnel and the SSO Division Contracting Officer.
- Responsible for the development of new company safety protocols and procedures and resolution of any outstanding safety issues which may arise during the conduction of site work.
- Reviews personnel and subcontractors current and up-to-date medical examination and acceptability of health and safety training.

## **FIELD PERSONNEL AND SUBCONTRACTORS (IF ANY)**

- Reports any unsafe or potentially hazardous conditions to the SSO
- Maintains knowledge of the information, instructions, and emergency response actions contained in this Construction HASP.
- Comply with rules, regulations and procedures as set forth in this Construction HASP and any revisions that are instituted.
- Prevents admittance to work sites by unauthorized personnel.

## **4.0 CHEMICAL & WASTE DESCRIPTION/CHARACTERIZATION**

The following list of compounds is based on the results of the recent subsurface investigation:

Semi Volatile Organic Compounds in soil:

- Anthracene
- Benzo (a) Anthracene
- Benzo (a) Pyrene
- Chrysene
- Benzo (b) Fluoranthene
- Benzo (k) Fluoranthene

- Fluoranthene
- Indeno (1,2,3-cd) Pyrene
- Pyrene
- Phenanthrene

Heavy Metals in soil:

- Chromium Trivalent
- Chromium, Hexavalent
- Copper
- Lead
- Zinc

Volatile Organic Compounds in Groundwater:

Tetrachloroethylene

Dissolved metals in Groundwater:

- Magnesium
- Sodium

Volatile Organic Compounds in soil vapors:

- Tetrachloroethylene
- Chloroform
- Acetone
- Carbon disulfide
- Methylene chloride
- Tetrahydrofuran
- Ethyl acetate
- Ethyl Benzene
- 1,2,4-Trimethylbenzene
- o-Xylene
- p- & m- Xylenes
- n-Heptane
- n-Heptane
- Toluene

**Appendix A** contains Material Safety Data Sheets

The following information references are presented in order to identify the properties, characteristics and hazards of the compounds and metals that may/will be encountered at the Site.

- \* Dangerous Properties of Industrial Materials - Sax
- \* Chemical Hazards of the Workplace - Proctor/Hughes

- \* Condensed Chemical Dictionary - Hawley
- \* Rapid Guide to Hazardous Chemical in the Workplace - Lewis 1990.
- \* NIOSH Guide to Chemical Hazards - 1990.
- \* ACGIH TLV Values and Biological Exposure Indices - 1991-1992.

## 5.0 HAZARD ASSESSMENT AND MITIGATION

The potential hazards associated with planned site activities include chemical, physical and biological hazards associated with the construction. This section discusses those hazards that are anticipated to be encountered during the activities listed in the scope of work.

The potential to encounter chemical hazards is dependent upon the work activity performed (invasive or non-invasive), the duration, and location of the work activity. Such hazards could include inhalation or skin contact with chemicals that could cause: dermatitis, skin burn, being overcome by vapors, or asphyxiation. In addition, the handling of contaminated materials and chemicals could result in fire and/or explosion.

The potential to encounter physical hazards during site work includes: heat stress, exposure to excessive noise, loss of limbs, being crushed, head injuries, cuts and bruises, and other physical hazards due to motor vehicle operation, heavy equipment and power tools.

### CHEMICAL HAZARDS

The potential for personnel and subcontractors to come in contact with chemical hazards may occur during the following tasks:

- Excavation
- Installation of vapor barrier and SSD systems
- Pouring of concrete foundation(s)

#### *Exposure Pathways*

Exposure to these compounds during ongoing activities may occur through inhalation of contaminated dust particles, inhalation of volatile vapor fume compounds, by way of dermal absorption, and accidental ingestion of the contaminant by either direct or indirect cross contamination activities (eating, smoking, poor hygiene). Indirectly, inhalation of contaminated dust particles can occur during adverse weather conditions (high or changing wind directions) or during operations that may generate airborne dust such as excavation.

#### *Dust Suppression*

The following techniques have been shown to be effective for the controlling of the generation and migration of dust during construction activities.

1. Applying water on haul roads.
2. Wetting equipment and excavation faces.
3. Spraying water on buckets during excavation and dumping.
4. Hauling materials in properly sealed or watertight containers.
5. Restricting vehicle speeds to 10mph.
6. Covering excavated areas and material after excavation activity ceases.
7. Reducing the excavation size and/or number of excavations.
8. Applying a dust suppressant, such as calcium chloride, in high vehicle traffic areas.

To evaluate the effectiveness of the dust suppression measures, air monitoring utilizing real-time dust-monitoring equipment will be performed. The requirements for air monitoring during post-remediation soil disturbance activities are presented in Section 5.0.

#### *Additional Precautions*

Dermal absorption or skin contact with chemical compounds is possible during invasive activities at the Site, including the excavation and/or capping of soils. The use of PPE in accordance with Section 9.0 and strict adherence to proper decontamination procedures should significantly reduce the risk of skin contact.

The potential for accidental ingestion of potentially hazardous chemicals is expected to be remote, when good hygiene practices are used. Unauthorized personnel, including all children, will not be allowed access to the Site.

### **PHYSICAL HAZARDS**

A variety of physical hazards may be present during Site activities. These hazards are similar to those associated with any construction type project and include digging or boring operations and excavation activities in the vicinity of underground utility locations. These physical hazards are due to motor vehicles, and heavy equipment operation, the use of improper use of power and hand tools, misuse of pressurized cylinders, walking on objects, tripping over objects, working on surfaces which have the potential to promote falling, mishandling and improper storage of solid and hazardous materials, skin burns, crushing of fingers, toes, limbs, hit on the head by falling objects or hit one's head due to not seeing the object of concern, temporary loss of one's hearing and/or eyesight. These hazards are not unique and are generally familiarly to most hazardous waste site workers at construction sites. Additional task specific safety requirements will be covered during safety briefings.

### **6.0 SPILL PREVENTION AND CONTROL PLAN**

Accidental spill and leaks of hazardous and non-hazardous materials will be properly controlled so that they do not adversely impact storm drain systems or receiving waters. A spill prevention and control plan will include the following:

#### *Spill/Leak Prevention Measures;*

- Place any material under cover (tarp) and away from storm drains or sensitive water bodies
- Properly label all containers so that the contents are easily identifiable
- Berm storage areas so that if a spill or leak occur they are easily contained

#### *Spill Response Procedures*

- Assessment of the Site and potential impacts by the SSO
- Containment of the material
- Notification of the personnel present at the Site and ensure evacuation procedure if necessary.

#### *Spill Cleanup Procedures*

- If small non-hazardous spill, use cleanup materials such as absorbents or rags and damp cloths and dispose of properly;
- If large non-hazardous spill or hazardous spill, a private hazmat team may need to be contacted to assess the situation and conduct the cleanup and proper disposal of the material.

### *Reporting*

- Petroleum spills will be reported immediately to the NYSDEC Spill Hotline.
- If material is unknown or hazardous, contact the local Fire Department.

### *Training*

- The SSO is responsible for providing refreshment training to all employees working on-site about spill prevention, spill response and cleanup on a routine basis.
- The SSO will identify key spill response personnel to assist in the spill control and cleanup procedures.

## **7.0 TRAINING**

### **GENERAL HEALTH AND SAFETY TRAINING**

In accordance with 29 CFR 1910.120, all construction personnel involved with the portions of the scope of work described in Section 2.0 will be briefed by the Project Manager on the potential hazards and the overall requirements in meeting the specifications of this Construction HASP.

The SSO will have the responsibility of ensuring that personnel assigned to this project comply with these requirements. Written certification of completion of any required training, if necessary, will be provided to the SSO.

### **MANAGER/SUPERVISOR TRAINING**

In accordance with 29 CFR 1910.120, on-Site management and supervisors who will be directly responsible for, or who supervise employees engaged in hazardous waste operation shall receive training as required in this Construction HASP and at least eight (8) additional hours of specialized training on managing such operations at the time of job assignment.

### **ANNUAL 8-HOUR REFRESHER TRAINING**

Annual 8-hour refresher training will be required of all hazardous waste site field personnel in order to maintain their qualification for fieldwork. The following topics will be reviewed: toxicology, respiratory protection, including air purifying devices and self-contained breathing apparatus (SCBA), medical surveillance, decontamination procedures and personnel protective clothing. In addition, topics deemed necessary by the SSO may be added to the above list.

### **SITE SPECIFIC TRAINING**

Prior to commencement of field activities, all personnel assigned to the project will be provided training that will specifically address the activities, procedures, monitoring, and equipment for the site operations. It will include Site and facility layout, hazards, and emergency services at the Site, and will highlight all provisions contained within this Construction HASP. This training will also allow field workers to clarify anything they do not understand and to reinforce their responsibilities regarding safety and operations for their particular activity.

### **ON-SITE SAFETY BRIEFINGS**

Project personnel and visitors will be given periodic on-site health and safety briefings by the SSO, or their designee, to assist site personnel in safely conducting their work activities. The briefings will include information on new operations to be conducted, changes in work practices, or changes in the Site's environmental conditions. The briefings will also provide a forum to facilitate conformance with safety requirements and to identify performance deficiencies related to safety during daily activities or as a result of safety audits.

### **ADDITIONAL TRAINING**

Additional training may be required by the SSO for participation in certain field tasks during the course of the project. Such additional training could be in the safe operation of heavy or power tool equipment or hazard communication training.

### **HAZWOPER TRAINING**

All remedial personnel that will be in direct contact with the native soil/fill materials must complete an initial 40-hour Hazardous Waste Operations and Emergency Response (HAZWOPER) training course and, where necessary, a current 8-hour refresher course

### **SUBCONTRACTOR TRAINING**

Subcontractor personnel working on-site may be exempted from the contents of this Construction HASP. The SSO will determine if this exemption is allowed. In any case, the subcontractor personnel who are exposed to hazards are not exempted from the contents of this Construction HASP.

## **8.0 MEDICAL SURVEILLANCE**

### **GENERAL**

No general or specific medical surveillance or other medical requirements are set forth in this Construction HASP.

## **9.0 SITE CONTROL, PPE & COMMUNICATIONS**

### **SITE CONTROL**

The area where the activities of the scope of work will be performed is considered to be the Exclusion Zone (EZ). All areas where excavation and handling of contaminated materials take place are considered the EZ. This zone will be clearly delineated by cones, tape, or other means. The SSO may establish more than one EZ where different levels of protection may be employed or where different hazards exist. Personnel are not allowed in the EZ without:

- A buddy
- Appropriate personal protective equipment (as necessary)

The remaining portions of the Site outside of the EZ will consist of a Support Zone (SZ) and a Contamination Reduction Zone (CRZ). Appropriate sanitary facilities, safety equipment, packaged/decontaminated and labeled samples will be located in SZ. Potentially contaminated personnel or materials will be allowed in the CRZ for decontamination as necessary.

### **PERSONAL PROTECTIVE EQUIPMENT**

#### *General*

The level of protection worn by field personnel will be enforced by the SSO. Levels of protection may be upgraded or downgraded at the discretion of the SSO. The decision shall be based on real-time air monitoring, site history data, and prior site experience. Any changes in the level of protection shall be recorded in the health and safety field logbook.

#### *PPE Specifications*

For tasks requiring Level C PPE, the following equipment shall be used:

- Cotton or disposable coveralls
- Disposable outer coveralls (Poly-coated Tyvek)

- Gloves, inner (latex)
- Gloves, outer (Nitrile®)
- Boots (PVC), steel toe/shank
- Boot covers (as needed)
- Hard Hat
- Hearing protection (as needed)
- Splash suit and face shield for decontamination operations (as needed)

For tasks requiring Level D PPE, the following equipment shall be used:

- Cotton or disposable coveralls
- Gloves, inner (latex)
- Gloves, outer (Nitrile®)
- Boots (PVC) steel toe/shank
- Boot covers (as needed)
- Hard hat
- Hearing protection (as needed)
- Safety glasses

For tasks requiring Level D PPE, the following equipment shall be used:

- Cotton or disposable coveralls
- Gloves, inner (latex)
- Gloves, outer (Nitrile®)
- Boots (PVC) steel toe/shank
- Boot covers (as needed)
- Hard hat
- Hearing protection (as needed)
- Safety glasses

For tasks requiring respiratory protection, the following equipment shall be used:

Level D - No respiratory protective equipment necessary except for a dust mask

Level C - A full-face air-purifying respirator equipped with organic vapor/pesticide-HEPA cartridges

Level B - An air line respirator or a self-contained breathing apparatus (SCBA)

***LEVEL OF PERSONAL PROTECTIVE EQUIPMENT REQUIRED***

<b>Activity</b>	<b>Level of Protection Respiratory/PPE</b>
Excavations	C/D
Foundation Construction	C/D

**COMMUNICATIONS**

Communications is the ability to talk with others. While working in Level C Protection, personnel may find that communication become a more difficult task and process to accomplish. This is further complicated by distance and space. In order to address this problem, electronic instruments, mechanical devices or hand signals will be used as follows:

- Walkie-Talkies - Hand held radios would be utilized as much as possible by field teams for communication between downrange operations and the Command Post base station.
- Telephones - A mobile telephone will be located in the Command Post vehicle in the Support Zone for communication with emergency support services/facilities. If a telephone is demobilized, the nearest public phones will be identified.
- Air Horns - A member of the downrange field team will carry an air horn and another will be evident in the Support Zone to alert field personnel to an emergency situation.
- Hand Signals - Members of the field team using the buddy system will employ this communication method. Signals become especially important when in the vicinity of heavy moving equipment and when using Level B respiratory equipment. The signals shall become familiar to the entire field team before site operations commence and they will be reinforced and reviewed during site-specific training.

### ***HAND SIGNALS FOR ON-SITE COMMUNICATION***

<b>Signal</b>	<b>Meaning</b>
Hand gripping throat	Out of air, can't breathe
Grip partners' wrist	Leave area immediately; no debate
Hands on top of head	Need assistance
Thumbs up	OK, I'm all right; I understand
Thumbs down	No; negative, unable to understand you. I'm not all right

## **10.0 AIR MONITORING PLAN**

### **GENERAL**

Continuous air monitoring in the EZ during invasive tasks will accompany site operations, as indicated in this HASP or as required by the SSO. Monitoring will be performed to verify the adequacy of respiratory protection, to aid in site layout and to document work exposure. All monitoring instruments shall be operated by qualified personnel only and will be calibrated daily prior to use, or more often as necessary. For additional references and information, see Hydro Tech's Site-Specific Air Monitoring Program.

### **REAL-TIME MONITORING**

#### *Instrumentation*

A PID (to monitor total volatile organic concentrations) will be used to measure worker breathing zone ambient on-site concentrations during on-site activities. The equipment will be calibrated daily and the results noted in the project field book. A background level will be established, at a minimum, on a daily basis, and recorded in the field book.

The following response actions will be taken based on PID readings in the breathing zone. All work will be performed in level D PPE unless breathing zone volatile organic concentrations exceed 5 ppm. Once levels of 25 ppm are measured, work will be stopped.

Volatile Organics	Photoionization Detector (PID)	>5ppm	Temporarily halt work activities & monitor until readings decrease to below 5ppm.
		>5ppm<25ppm	Halt work activities, upgrade to level C continue monitoring.
		>25ppm	Shut down work activities

During soil excavation, particulate monitoring will be performed using a real-time particulate monitor that will monitor particulate matter less than ten microns (PM10) with the following minimum performance standards:

Object to be measured: Dust. Mists, Aerosols

Size range: < 0.1 to 10 microns

Sensitivity: 0.001 mg/m<sup>3</sup>

Overall Accuracy: = 10% as compared to gravimetric analysis of stearic acid or reference dust.

Particulate levels will be monitored immediately downwind at the working site and integrated over a period not to exceed 15 minutes. The action level will be established at 150 ug/m<sup>3</sup> over the integrated period not to exceed 15 minutes.

*Action Levels*

Action levels for upgrading of PPE in this Construction HASP will apply to all site work during the duration of field activities at the Site. The action level is the presence of visible airborne dust. When airborne dust is observed, specific dust-mitigating procedures will be implemented. These dust-mitigating procedures are documented in Section 6.0.

**11.0 SAFETY CONSIDERATIONS**

**GENERAL**

In addition to the specific requirements of this HASP, common sense should be used at all times. The general safety rules and practices below will be in effect at the Site at the discretion of the Project Manager, SSO or other authorized personnel.

- The site will be suitably marked or barricaded as necessary to prevent unauthorized visitors but not hinder emergency services if needed.
- As needed, all open holes, trenches, and obstacles will be properly barricaded in accordance with local site requirements. These requirements will be determined by proximity to traffic ways, both pedestrian and vehicular, and site of the hole, trench, or obstacle. If holes are required to be left open during non-working hours, they will be adequately decked over or barricaded and sufficiently lighted.
- Before any digging or boring operations are conducted, underground utility locations will be identified. All boring, excavation, and other site work will be planned and performed with consideration for underground lines. Any excavation work will be performed in accordance with Hydro Tech’s Standard Operating Procedures for Excavations.

- Either workers or other people will enact dust-mitigating procedures when the potential for the inhalation of dust particles is present.
- The act of smoking and/or ignition sources in the vicinity of potentially flammable or contaminated material is strictly prohibited.
- Drilling, boring, and use of cranes and drilling rigs, erection of towers, movement of vehicles and equipment and other activities will be planned and performed with consideration for the location, height, and relative position of aboveground utilities and fixtures, including signs; canopies; building and other structures and construction; and natural features such as trees, boulders, bodies of water, and terrain.
- When working in areas where flammable vapors may be present, particular care shall be exercised with tools and equipment that may be sources of ignition. All tools and equipment provided must be properly bonded and/or grounded. Metal buttons and zippers are prohibited on safety clothing for areas that may contain a flammable or explosive atmosphere.
- Approved and appropriate safety equipment (as specified in this Construction HASP), such as eye protection, hard hats, foot protection, and respirators, must be worn in areas where required. In addition, eye protection must be worn when sampling soil or water that may be contaminated.
- No smoking, eating, chewing tobacco, gum chewing, or drinking will be allowed in the contaminated areas.
- Contaminated tools and hands must be kept away from the face.
- Personnel must use personal hygiene safe guards (washing up) at the end of the shift or as soon as possible after leaving the Site.
- Each sample must be treated and handled as though it were contaminated.
- Persons with long hair and/or loose fitting clothing that could become entangled in power equipment must take adequate precautions.
- Horseplay is prohibited in the work area.
- Work while under the influence of intoxicants, narcotics, or controlled substances is prohibited.

#### **POSTED SIGNS**

Posted danger signs will be used where an immediate hazard exists. Caution signs will be posted to warn against potential hazards and to caution against unsafe practices. Traffic control methods and barricades will be used as needed. Wooden stakes and flagging tape, or equally effective material will be used to demarcate all restricted areas.

Other postings may include the OSHA poster, emergency hospital route, and telephone numbers of contact personnel.

## **INVASIVE OPERATIONS**

The SSO will be present on-Site during all invasive work (e.g. excavations and capping). The SSO will ensure that appropriate monitoring, levels of protection, and safety procedures are followed. No personnel will enter any excavations for any reasons. All non-essential personnel will stay at least 10 feet back from the edge of the excavation and out of the swing radius of the backhoe. No drums or other potential sources will be sampled or removed during this phase without further additions to the Construction HASP.

The proximity of water, sewer, and electrical lines will be identified prior to invasive operations. The possibility of the presence of underground conduits or vessels containing materials under pressure will also be investigated prior to invasive operations. Properly-sized containment systems will be utilized and consideration of the potential volume of liquid or waste released during operations will be discussed with members of the field team to minimize the potential for spills and provide a method for collection of waste materials. Emergency evacuation procedures and the location of safety equipment will be established prior to start up operations. The use of protective clothing, especially hard hats, boots, and gloves will be required during drilling and other heavy equipment work.

## **SOIL, GROUNDWATER AND LIQUID WASTE SAMPLING**

During Site invasive excavation, soil sampling for waste characterization may be required for disposal purposes. No groundwater or liquid waste sampling is anticipated during site remediation.

## **HEAVY EQUIPMENT DECONTAMINATION**

Personnel steam cleaning heavy equipment, if necessary shall use the prescribed level of protection and adhere to the buddy system. Initially this task usually employs Level C. The heavy equipment decontamination shall be restricted to authorized personnel only. Special consideration will be given to wind speed and direction. Downwind areas are to be kept free of personnel to avoid unnecessary exposure to potential airborne contamination.

## **ADDITIONAL SAFETY CONSIDERATIONS**

No other additional safety considerations at this time.

## **12.0 DECONTAMINATION AND DISPOSAL PROCEDURES**

### **CONTAMINATION PREVENTION**

One of the most important aspects of decontamination is the prevention of contamination. Good contamination prevention should minimize worker exposure and help ensure valid sample results by precluding cross-contamination. Procedures for contamination avoidance include:

#### Personnel:

- Do not walk through areas of obvious or known contamination.
- Do not directly handle or touch contaminated materials.
- Make sure that there are no cuts or tears on PPE.
- Fasten all closures in suits; cover with tape if necessary.
- Particular care should be taken to prevent any skin injuries.
- Stay upwind of airborne contaminants.
- Do not carry cigarettes, cosmetics, gum, etc. into contaminated areas.

#### Sampling and Monitoring:

When required by the SSO, cover instruments with clear plastic, leaving openings for sampling ports. Keep all decontaminated sampling materials in bags prior to emplacement of sample matrix.

#### Heavy Equipment:

Care should be taken to limit the amount of contamination that comes in contact with heavy equipment (tires). Dust control measures may be needed on roads inside the site boundaries.

### **PERSONNEL DECONTAMINATION**

All personnel shall pass through an outlined decontamination procedure when exiting the hot zone at each location. A field wash for equipment and PPE shall be set up at each work location. The system will include a gross wash and rinse for all disposable clothing and boots worn in the EZ. Upon exiting the EZ, all personnel will wash their hands, arms, neck, and face before entering the Support Zone.

### **EQUIPMENT DECONTAMINATION**

Equipment used at the Site that is potentially contaminated shall be decontaminated to prevent hazardous materials from leaving the Site. All heavy equipment will be decontaminated at the decontamination pad and inspected by the SSO and Project Manager before it leaves the Site. The decontamination area will provide for the containment of all wastewater from the decontamination process. Respirators, airline and any other personnel equipment that comes in contact with contaminated soils shall pass through a field wash.

### **DECONTAMINATION DURING MEDICAL EMERGENCIES**

If emergency life-saving first aid and/or medical treatment are required, normal decontamination procedures may need to be abbreviated or omitted. The Site SSO or designee will accompany contaminated victims to the medical facility to provide advice on matters involving decontamination, when necessary. The outer garments can be removed if they do not cause delays, interfere with treatment, or aggravate the problem. Respiratory equipment must always be removed. Protective clothing can be cut away. If the outer contaminated garments cannot be safely removed, a plastic barrier between the individual and clean surfaces should be used to help prevent contaminating the inside of ambulances and /or medical personnel. Outer garments are then removed at the medical facility.

No attempt will be made to wash or rinse the victim, unless it is known that the individual has been contaminated with an extremely toxic or corrosive material that could also cause severe injury or loss of life to emergency response personnel. For minor medical problems or injuries, the normal decontamination procedures will be followed. Note that heat stroke requires prompt treatment to prevent irreversible damage or death. Protective clothing must be promptly removed. Less serious forms of heat stress also require prompt attention and removal of protective clothing immediately. Decontamination should be omitted or minimized and treatment begun immediately unless the victim is obviously contaminated.

### **DISPOSAL PROCEDURES**

The SSO and Project Manager will develop a segregating system of non-hazardous waste and hazardous waste. All discarded material, waste materials, or other objects shall be handled in such a way as to preclude the potential for spreading contamination, creating sanitary hazards, or

causing litter to be left on site. All potentially contaminated materials, e.g. clothing, gloves, etc., will be bagged or drummed as necessary, labeled and segregated for disposal. All non-contaminated materials shall be collected and bagged for appropriate disposal as normal domestic waste.

### **13.0 EMERGENCY PLAN**

The potential for the development of an emergency situation is low considering the low concentrations of hazardous substances at the work site. Nevertheless, an emergency situation could occur. All personnel, prior to the start of work, will know the emergency plan outlined in this section. The emergency plan will be available for use at all times during site work.

Various individual site characteristics will determine preliminary actions taken to assure that this emergency plan is successfully implemented in the event of a site emergency. Careful consideration must be given to the proximity of neighborhood housing or places of employment, and to the relative possibility of site fire, explosion or release of vapors or gases that could affect the surrounding community.

The Project Manager shall make contact with local fire, police, and other emergency units prior to beginning work on site. In these contacts, the Project Manager will inform the emergency units about the nature and duration of work expected to the Site and the type of contaminants and the possible health or safety effects of emergencies involving these contaminants. At this time, the Project Manager and the emergency response units shall make the necessary arrangements to be prepared for any emergencies that could occur.

The Project Manager shall implement the contingency plan whenever conditions at the Site warrant such action. The Project Manager will be responsible for coordination of the evacuation emergency treatment, and transportation of site personnel as necessary, and notification of emergency response units and the appropriate management staff.

### **EVACUATION**

In the event of an emergency situation, such as fire, explosion, or significant release of toxic gases, an air horn or other appropriate device will be sounded for approximately 10 second intervals indicating the initiation of evacuation procedures. All personnel will evacuate and assemble near the entrance to the site. The location shall be upwind of the Site where possible.

For efficient and safe site evacuation and assessment of the emergency situation, the Project Manager will have authority to initiate action if outside services are required. Under no circumstances will incoming personnel or visitors be allowed to proceed into the area once the emergency signal has been given. The SSO or designated SSO must ensure that access for emergency equipment is provided and that all combustion apparatuses have been shut down once the alarm has been sounded. Once the safety of all personnel is established, the Fire Department and other emergency response groups as necessary will be notified by telephone of the emergency.

### **POTENTIAL OR ACTUAL FIRE OR EXPLOSION**

Immediately evacuate the Site (air horn will sound for 10-second intervals), notify the local fire and police departments, and other appropriate emergency response groups if an actual fire or explosion has taken place.

## **PERSONNEL INJURY**

Emergency first aid shall be applied on site as deemed necessary. If necessary, the individual shall be decontaminated and transported to the nearest medical facility.

The ambulance/rescue squad shall be contacted for transport as necessary in an emergency. However, since some situations may require transport of an injured party by other means, the hospital route is identified below. A map to this facility provided with this HASP in Section 2.2.3.

## **ACCIDENT/INCIDENT REPORTING**

As soon as first aid and/or emergency response needs have been met, the employer of the injured party must be immediately notified of any incident. Written confirmation of verbal reports is to be submitted within 24 hours. A standard report form entitled "Accident Data Report" is to be used for this purpose.

For reporting purposes, the term accident refers to fatalities, lost time injuries, spill, or exposure to hazardous materials (toxic materials, explosive or flammable materials).

Any information released from the health care provider, which is not deemed confidential patient information, is to be attached to the appropriate form. Any medical information that is released by patient consent is to be filed in the individuals' medical records and treated as confidential.

## **OVERT PERSONNEL EXPOSURE**

**SKIN CONTACT:** Use copious amounts of soap and water. Wash/rinse affected area thoroughly, and then provide appropriate medical attention. Eyes should be rinsed for 15 minutes upon chemical contamination.

**INHALATION:** Move personnel to fresh air and if necessary, decontaminate and transport to hospital.

**INGESTION:** Decontamination and transport to emergency medical facility.

**PUNCTURE WOUND  
OR LACERATION:** Decontaminate and transport to emergency medical facility.

## **ADVERSE WEATHER CONDITIONS**

In the event of adverse weather conditions, the SSO or designee will determine if work can continue without sacrificing the health and safety of all field workers. Some of the items to be considered prior to determining if work should continue are:

- \* Potential for heat stress and heat-related injuries
- \* Potential for cold stress and cold-related injuries
- \* Treacherous weather-related conditions
- \* Limited visibility
- \* Potential for electrical storms

Site activities will be limited to daylight hours and acceptable weather conditions. Inclement working conditions include heavy rain, fog, high winds, and lightning. Observe daily weather reports and evacuate if necessary in case of inclement weather conditions.

## **EMERGENCY RESPONSE EQUIPMENT LIST**

Some or all of the following will either be available on-Site or be able to be brought to the Site within a 2-hour period:

- \* 55 Gallon Drums
- \* 85 Gallon Drums
- \* Absorbent Pads
- \* Absorbent Booms
- \* Speedy-Dry
- \* Plastic Sheeting
- \* Hay Bales
- \* Pneumatic Nibbler
- \* Back Hoe
- \* Pressure Washer
- \* Air Compressor
- \* Wilden Pumps
- \* Equipment Storage Trailer
- \* Submersible Pumps
- \* Miscellaneous Hand Tools
- \* Portable Lighting

## **LARGE EQUIPMENT**

If necessary, the following large equipment will be brought to the Site within 2-hours:

- \* Large Vacuum Truck
- \* Super Sucker
- \* Dump Trucks
- \* Drill Rig
- \* Utility Vehicle

## **14.0 LOGS, REPORTS AND RECORD KEEPING**

### **Medical and Training Records**

The Site Superintendent keeps medical and training records. All subcontractors must provide verification of training and medical qualifications to the Site Superintendent. The Site Superintendent will keep a log of personnel meeting appropriate training and medical qualifications for site work. The log will be kept in the project file. Medical records will be maintained in accordance with 29 CFR 1910.20.

### **Onsite Log**

A log of personnel onsite each day will be kept by the Site Superintendent. Originals will be kept in the project file.

### **Exposure Records**

Any monitoring results, laboratory reports, calculations and air sampling data sheets are part of an employee exposure record. These records will be kept in accordance with 29 CFR 1910.20.

The originals will be sent to the Hydro Tech records coordinator. For subcontractor employees, the original will be sent to the subcontractor employer and a copy kept in the project file.

### **Accident/Incident Reports**

An accident/incident report must be completed for all accidents and incidents. Hydro Tech will send the originals to the appropriate Hydro Tech records coordinator for maintenance. Copies will be distributed as stated. A copy of the forms will be kept in the project file.

### **OSHA Form 200**

An OSHA Form 200 (Log of Occupational Injuries and Illnesses) will be kept at the Site. All recordable injuries or illnesses will be recorded on this form. At the end of the project, the original will be sent to the Hydro Tech corporate records administrator for maintenance. Subcontractor employers must also meet the requirements of maintaining an OSHA 200 form. The Hydro Tech accident/incident report meets the requirements of the OSHA Form 101 (Supplemental Record) and must be maintained with the OSHA Form 200 for all recordable injuries or illnesses.

### **Health and Safety Field Log Book**

The SSO or designee will maintain the logbook in accordance with standard Hydro Tech procedures. Daily site conditions, activities, personnel, calibration records, monitoring results and significant events will be recorded. The original logbooks will become part of the exposure records file.

## **15.0 SANITATION**

Since sanitary sewer connection has not been established, provisions shall be made for access to sanitary systems by using nearby public facilities consistent with provisions of governing local ordinance codes. This will include the use of outside firms providing and maintaining "Porta Potties" or similar devices.


If a commercial/industrial laundry is used to clean or launder clothing that is potentially contaminated, they shall be informed of the potential harmful effects of exposure to hazardous substances related to the affected clothing.

Personnel and subcontractors sites shall follow decontamination procedures described in the Construction HASP. This will generally include, when necessary, site-specific training in shower usage and cleanup, personal hygiene requirements and the donning of protective equipment/clothing.


**FIGURE 1**  
**DIRECTIONS TO HOSPITAL**



**Directions to Mount Sinai Hospital Queens**  
25-10 30th Ave, Long Island City, NY 11102  
**0.8 mi – about 4 mins**

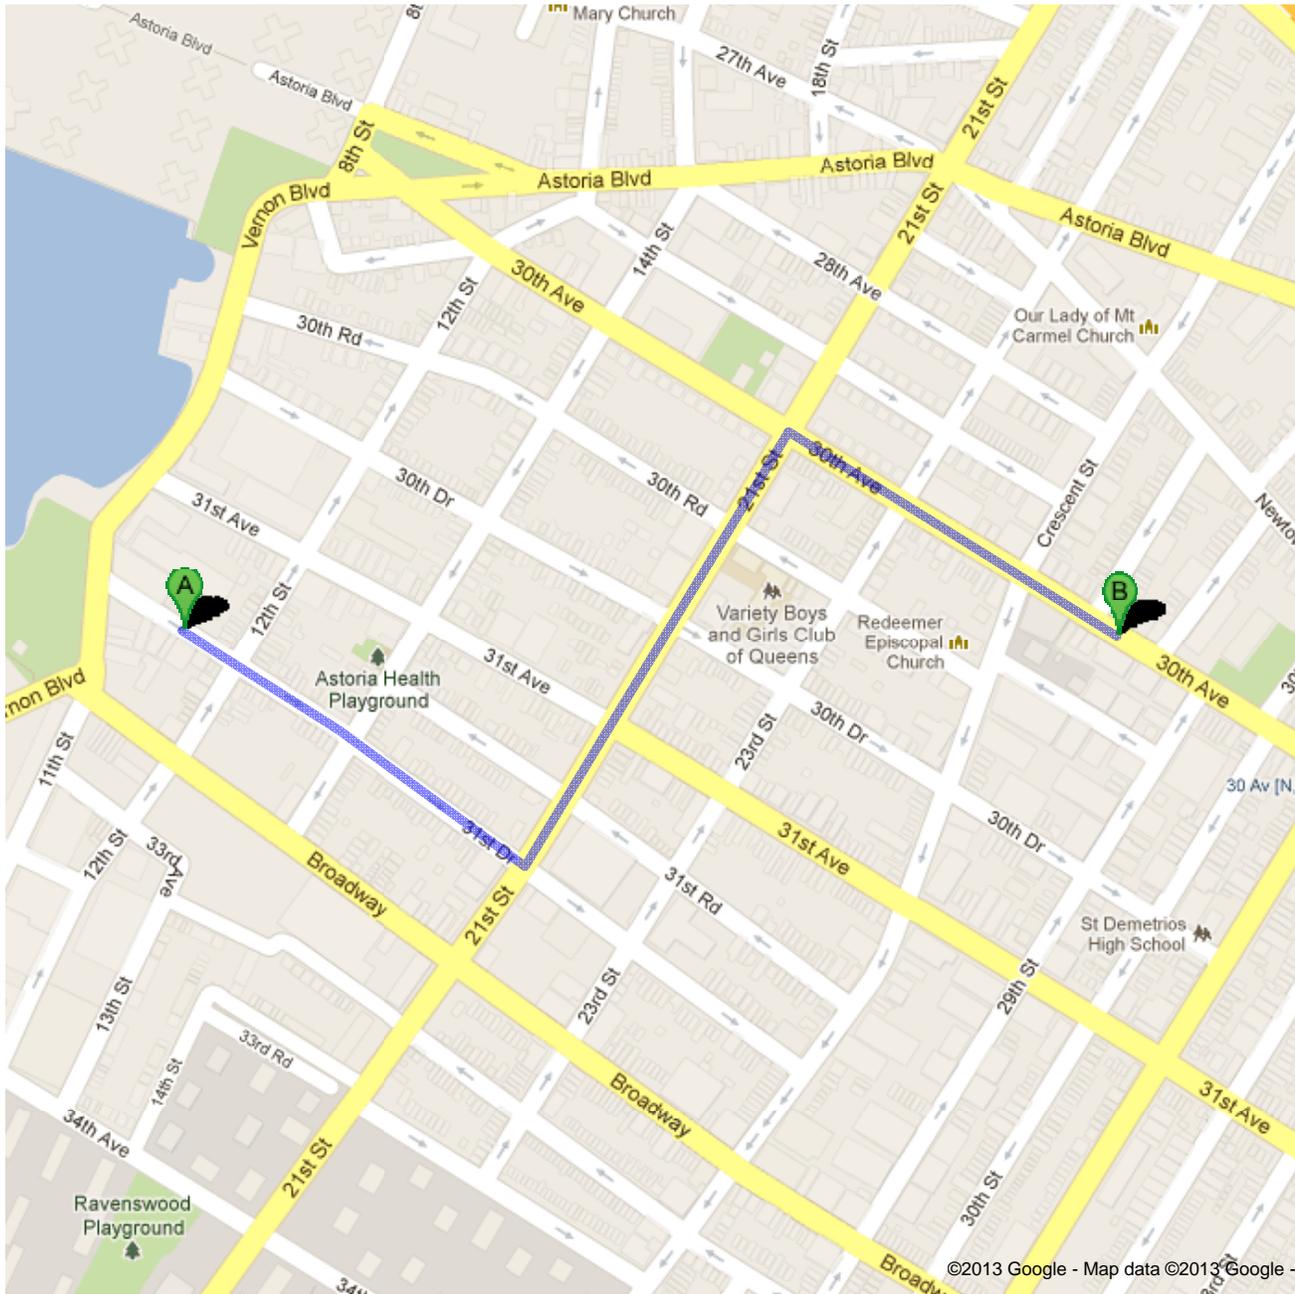

**ATTACHMENT A  
HEALTH AND SAFETY FACT SHEETS**



Health	2
Fire	1
Reactivity	0
Personal Protection	H

## Material Safety Data Sheet Trichloroethylene MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Trichloroethylene

**Catalog Codes:** SLT3310, SLT2590

**CAS#:** 79-01-6

**RTECS:** KX4560000

**TSCA:** TSCA 8(b) inventory: Trichloroethylene

**CI#:** Not available.

**Synonym:**

**Chemical Formula:** C<sub>2</sub>HCl<sub>3</sub>

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Trichloroethylene	79-01-6	100

**Toxicological Data on Ingredients:** Trichloroethylene: ORAL (LD50): Acute: 5650 mg/kg [Rat]. 2402 mg/kg [Mouse]. DERMAL (LD50): Acute: 20001 mg/kg [Rabbit].

### Section 3: Hazards Identification

**Potential Acute Health Effects:** Hazardous in case of skin contact (irritant, permeator), of eye contact (irritant), of ingestion, of inhalation.

**Potential Chronic Health Effects:**

**CARCINOGENIC EFFECTS:** Classified + (PROVEN) by OSHA. Classified A5 (Not suspected for human.) by ACGIH.

**MUTAGENIC EFFECTS:** Not available. **TERATOGENIC EFFECTS:** Not available. **DEVELOPMENTAL TOXICITY:** Not available. The substance is toxic to kidneys, the nervous system, liver, heart, upper respiratory tract. Repeated or prolonged exposure to the substance can produce target organs damage.

### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** May be combustible at high temperature.

**Auto-Ignition Temperature:** 420°C (788°F)

**Flash Points:** Not available.

**Flammable Limits:** LOWER: 8% UPPER: 10.5%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>), halogenated compounds.

**Fire Hazards in Presence of Various Substances:** Not available.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:** Not available.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Absorb with an inert material and put the spilled material in an appropriate waste disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/

spray. Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes

**Storage:**

Keep container dry. Keep in a cool place. Ground all equipment containing material. Carcinogenic, teratogenic or mutagenic materials should be stored in a separate locked safety storage cabinet or room.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:**

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 50 STEL: 200 (ppm) from ACGIH (TLV) TWA: 269 STEL: 1070 (mg/m<sup>3</sup>) from ACGIH Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid.

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 131.39 g/mole

**Color:** Clear Colorless.

**pH (1% soln/water):** Not available.

**Boiling Point:** 86.7°C (188.1°F)

**Melting Point:** -87.1°C (-124.8°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 1.4649 (Water = 1)

**Vapor Pressure:** 58 mm of Hg (@ 20°C)

**Vapor Density:** 4.53 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 20 ppm

**Water/Oil Dist. Coeff.:** The product is equally soluble in oil and water; log(oil/water) = 0

**Ionicity (in Water):** Not available.

**Dispersion Properties:** See solubility in water, methanol, diethyl ether, acetone.

**Solubility:**

Easily soluble in methanol, diethyl ether, acetone. Very slightly soluble in cold water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Not available.

**Corrosivity:**

Extremely corrosive in presence of aluminum. Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

### Section 11: Toxicological Information

**Routes of Entry:** Dermal contact. Eye contact. Inhalation. Ingestion.

**Toxicity to Animals:**

Acute oral toxicity (LD50): 2402 mg/kg [Mouse]. Acute dermal toxicity (LD50): 20001 mg/kg [Rabbit].

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified + (PROVEN) by OSHA. Classified A5 (Not suspected for human.) by ACGIH. The substance is toxic to kidneys, the nervous system, liver, heart, upper respiratory tract.

**Other Toxic Effects on Humans:** Hazardous in case of skin contact (irritant, permeator), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Passes through the placental barrier in human. Detected in maternal milk in human.

**Special Remarks on other Toxic Effects on Humans:** Not available.

### Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are more toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

### Section 14: Transport Information

**DOT Classification:** CLASS 6.1: Poisonous material.

**Identification:** : Trichloroethylene : UN1710 PG: III

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

### Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Trichloroethylene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Trichloroethylene Pennsylvania RTK: Trichloroethylene Florida: Trichloroethylene Minnesota: Trichloroethylene Massachusetts RTK: Trichloroethylene New Jersey: Trichloroethylene TSCA 8(b) inventory: Trichloroethylene CERCLA: Hazardous substances.: Trichloroethylene

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

### Other Classifications:

#### WHMIS (Canada):

CLASS D-1B: Material causing immediate and serious toxic effects (TOXIC). CLASS D-2B: Material causing other toxic effects (TOXIC).

#### DSCL (EEC):

R36/38- Irritating to eyes and skin. R45- May cause cancer.

#### HMIS (U.S.A.):

**Health Hazard:** 2

**Fire Hazard:** 1

**Reactivity:** 0

**Personal Protection:** h

#### National Fire Protection Association (U.S.A.):

**Health:** 2

**Flammability:** 1

**Reactivity:** 0

**Specific hazard:**

#### Protective Equipment:

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Splash goggles.

## Section 16: Other Information


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:54 PM

**Last Updated:** 11/01/2010 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	0
Reactivity	0
Personal Protection	G

## Material Safety Data Sheet Tetrachloroethylene MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Tetrachloroethylene

**Catalog Codes:** SLT3220

**CAS#:** 127-18-4

**RTECS:** KX3850000

**TSCA:** TSCA 8(b) inventory: Tetrachloroethylene

**CI#:** Not available.

**Synonym:** Perchloroethylene; 1,1,2,2-Tetrachloroethylene; Carbon bichloride; Carbon dichloride; Ankilostin; Didakene; Dilatin PT; Ethene, tetrachloro-; Ethylene tetrachloride; Perawin; Perchlor; Perclene; Perclene D; Percosolve; Tetrachloroethene; Tetraleno; Tetralox; Tetravec; Tetroguer; Tetropil

**Chemical Name:** Ethylene, tetrachloro-

**Chemical Formula:** C<sub>2</sub>-Cl<sub>4</sub>

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Tetrachloroethylene	127-18-4	100

**Toxicological Data on Ingredients:** Tetrachloroethylene: ORAL (LD50): Acute: 2629 mg/kg [Rat]. DERMAL (LD): Acute: >3228 mg/kg [Rabbit]. MIST(LC50): Acute: 34200 mg/m 8 hours [Rat]. VAPOR (LC50 ): Acute: 5200 ppm 4 hours [Mouse].

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of skin contact (permeator), of eye contact (irritant), of ingestion.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Classified A3 (Proven for animal.) by ACGIH. Classified 2A (Probable for human.) by IARC, 2 (anticipated carcinogen) by NTP. MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to kidneys, liver, peripheral nervous system, respiratory tract, skin, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage.

## Section 4: First Aid Measures

### Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

### Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

### Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

### Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

### Serious Inhalation:

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

### Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Non-flammable.

**Auto-Ignition Temperature:** Not applicable.

**Flash Points:** Not applicable.

**Flammable Limits:** Not applicable.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:** Not applicable.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:** Not applicable.

**Special Remarks on Fire Hazards:** Not available.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

### Large Spill:

Absorb with an inert material and put the spilled material in an appropriate waste disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Do not ingest. Do not breathe gas/fumes/ vapor/spray. Avoid contact with skin. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, metals, acids, alkalis.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value.

**Personal Protection:**

Safety glasses. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 25 (ppm) from OSHA (PEL) [United States] TWA: 25 STEL: 100 (ppm) from ACGIH (TLV) [United States] TWA: 170 (mg/m3) from OSHA (PEL) [United States] Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid.

**Odor:** Ethereal.

**Taste:** Not available.

**Molecular Weight:** 165.83 g/mole

**Color:** Clear Colorless.

**pH (1% soln/water):** Not available.

**Boiling Point:** 121.3°C (250.3°F)

**Melting Point:** -22.3°C (-8.1°F)

**Critical Temperature:** 347.1°C (656.8°F)

**Specific Gravity:** 1.6227 (Water = 1)

**Vapor Pressure:** 1.7 kPa (@ 20°C)

**Vapor Density:** 5.7 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 5 - 50 ppm

**Water/Oil Dist. Coeff.:** The product is more soluble in oil; log(oil/water) = 3.4

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Miscible with alcohol, ether, chloroform, benzene, hexane. It dissolves in most of the fixed and volatile oils. Solubility in water: 0.015 g/100 ml @ 25 deg. C It slowly decomposes in water to yield Trichloroacetic and Hydrochloric acids.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, metals, acids, alkalis.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Oxidized by strong oxidizing agents. Incompatible with sodium hydroxide, finely divided or powdered metals such as zinc, aluminum, magnesium, potassium, chemically active metals such as lithium, beryllium, barium. Protect from light.

**Special Remarks on Corrosivity:** Slowly corrodes aluminum, iron, and zinc.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Eye contact. Inhalation. Ingestion.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 2629 mg/kg [Rat]. Acute dermal toxicity (LD50): >3228 mg/kg [Rabbit]. Acute toxicity of the vapor (LC50): 5200 4 hours [Mouse].

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified A3 (Proven for animal.) by ACGIH. Classified 2A (Probable for human.) by IARC, 2 (Some evidence.) by NTP. MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast. May cause damage to the following organs: kidneys, liver, peripheral nervous system, upper respiratory tract, skin, central nervous system (CNS).

**Other Toxic Effects on Humans:**

Hazardous in case of skin contact (irritant), of inhalation. Slightly hazardous in case of skin contact (permeator), of ingestion.

**Special Remarks on Toxicity to Animals:**

Lowest Published Lethal Dose/Conc: LDL [Rabbit] - Route: Oral; Dose: 5000 mg/kg LDL [Dog] - Route: Oral; Dose: 4000 mg/kg LDL [Cat] - Route: Oral; Dose: 4000 mg/kg

**Special Remarks on Chronic Effects on Humans:**

May cause adverse reproductive effects and birth defects (teratogenic). May affect genetic material (mutagenic). May cause cancer.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: Causes skin irritation with possible dermal blistering or burns. Symptoms may include redness, itching, pain, and possible dermal blistering or burns. It may be absorbed through the skin with possible systemic effects. A single prolonged skin exposure is not likely to result in the material being absorbed in harmful amounts. Eyes: Contact causes transient eye irritation, lacrimation. Vapors cause eye/conjunctival irritation. Symptoms may include redness and pain. Inhalation: The main route to occupational exposure is by inhalation since it is readily absorbed through the lungs. It causes respiratory tract irritation, . It can affect behavior/central nervous system (CNS depressant and anesthesia ranging from slight inebriation to death, vertigo, somnolence, anxiety, headache, excitement, hallucinations, muscle incoordination, dizziness, lightheadness, disorientation, seizures, emotional instability, stupor, coma). It may cause pulmonary edema. Ingestion: It can cause nausea, vomiting, anorexia, diarrhea, bloody stool. It may affect the liver, urinary system (proteinuria, hematuria, renal failure, renal tubular disorder), heart (arrhythmias). It may affect behavior/central nervous system with symptoms similar to that of inhalation. Chronic Potential Health Effects: Skin: Prolonged or repeated skin contact may result in excessive drying of the skin, and irritation. Ingestion/Inhalation: Chronic exposure can affect the liver (hepatitis, fatty liver degeneration), kidneys, spleen, and heart (irregular heartbeat/arrhythmias, cardiomyopathy, abnormal EEG), brain, behavior/central nervous system/peripheral nervous system (impaired memory, numbness of extremities, peripheral neuropathy and other

## Section 12: Ecological Information

### Ecotoxicity:

Ecotoxicity in water (LC50): 18.4 mg/l 96 hours [Fish (Fathead Minnow)]. 18 mg/l 48 hours [Daphnia (daphnia)]. 5 mg/l 96 hours [Fish (Rainbow Trout)]. 13 mg/l 96 hours [Fish (Bluegill sunfish)].

**BOD5 and COD:** Not available.

### Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

### Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** CLASS 6.1: Poisonous material.

**Identification:** : Tetrachloroethylene UNNA: 1897 PG: III

**Special Provisions for Transport:** Marine Pollutant

## Section 15: Other Regulatory Information

### Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Tetrachloroethylene California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Tetrachloroethylene Connecticut hazardous material survey.: Tetrachloroethylene Illinois toxic substances disclosure to employee act: Tetrachloroethylene Illinois chemical safety act: Tetrachloroethylene New York release reporting list: Tetrachloroethylene Rhode Island RTK hazardous substances: Tetrachloroethylene Pennsylvania RTK: Tetrachloroethylene Minnesota: Tetrachloroethylene Michigan critical material: Tetrachloroethylene Massachusetts RTK: Tetrachloroethylene Massachusetts spill list: Tetrachloroethylene New Jersey: Tetrachloroethylene New Jersey spill list: Tetrachloroethylene Louisiana spill reporting: Tetrachloroethylene California Director's List of Hazardous Substances: Tetrachloroethylene TSCA 8(b) inventory: Tetrachloroethylene TSCA 8(d) H and S data reporting: Tetrachloroethylene Effective date: 6/1/87; Sunset date: 6/1/97 SARA 313 toxic chemical notification and release reporting: Tetrachloroethylene CERCLA: Hazardous substances.: Tetrachloroethylene: 100 lbs. (45.36 kg)

### Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

### Other Classifications:

#### WHMIS (Canada):

CLASS D-1B: Material causing immediate and serious toxic effects (TOXIC). CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

#### DSCL (EEC):

R40- Possible risks of irreversible effects. R51/53- Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. S23- Do not breathe gas/fumes/vapour/spray S26- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. S37- Wear suitable gloves. S61- Avoid release to the environment. Refer to special instructions/Safety data sheets.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 0

**Reactivity:** 0

**Personal Protection:** g

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 0

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

**Section 16: Other Information**


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:29 PM

**Last Updated:** 11/01/2010 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	3
Reactivity	0
Personal Protection	H

## Material Safety Data Sheet p-Xylene MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** p-Xylene

**Catalog Codes:** SLX1120

**CAS#:** 106-42-3

**RTECS:** ZE2625000

**TSCA:** TSCA 8(b) inventory: p-Xylene

**CI#:** Not applicable.

**Synonym:** p-Methyltoluene

**Chemical Name:** 1,4-Dimethylbenzene

**Chemical Formula:** C<sub>6</sub>H<sub>4</sub>(CH<sub>3</sub>)<sub>2</sub>

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
{p-}Xylene	106-42-3	100

**Toxicological Data on Ingredients:** p-Xylene: ORAL (LD50): Acute: 5000 mg/kg [Rat.]. DERMAL (LD50): Acute: 12400 mg/kg [Rabbit.]. VAPOR (LC50): Acute: 4550 ppm 4 hour(s) [Rat].

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Very hazardous in case of skin contact (irritant), of eye contact (irritant). Slightly hazardous in case of skin contact (permeator), of ingestion, of inhalation. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

**Potential Chronic Health Effects:**

Hazardous in case of skin contact (irritant), of eye contact (irritant).

Slightly hazardous in case of skin contact (permeator), of ingestion, of inhalation.

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

The substance is toxic to blood, kidneys, the nervous system, liver.

Repeated or prolonged exposure to the substance can produce target organs damage.

## Section 4: First Aid Measures

**Eye Contact:** Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 527°C (980.6°F)

**Flash Points:** CLOSED CUP: 25°C (77°F). OPEN CUP: 28.9°C (84°F) (Cleveland).

**Flammable Limits:** LOWER: 1.1% UPPER: 7%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:** Highly flammable in presence of open flames and sparks, of heat.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable liquid, insoluble in water.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:**

Explosive in the form of vapor when exposed to heat or flame. Vapor may travel considerable distance to source of ignition and flash back. When heated to decomposition it emits acrid smoke and irritating fumes.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Toxic flammable liquid, insoluble or very slightly soluble in water.

Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not get water inside container. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

**Section 7: Handling and Storage****Precautions:**

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as oxidizing agents.

**Storage:**

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. A refrigerated room would be preferable for materials with a flash point lower than 37.8°C (100°F).

**Section 8: Exposure Controls/Personal Protection****Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:**

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 100 STEL: 150 (ppm) from ACGIH (TLV)

TWA: 434 STEL: 651 (mg/m<sup>3</sup>) from ACGIH Consult local authorities for acceptable exposure limits.

**Section 9: Physical and Chemical Properties**

**Physical state and appearance:** Liquid. (Liquid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 106.17 g/mole

**Color:** Colorless.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 138°C (280.4°F)

**Melting Point:** 12°C (53.6°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 0.86 (Water = 1)

**Vapor Pressure:** 9 mm of Hg (@ 20°C)

**Vapor Density:** 3.7 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 0.62 ppm

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** See solubility in water, methanol, diethyl ether.

**Solubility:**

Easily soluble in methanol, diethyl ether.

Insoluble in cold water, hot water.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Reactive with oxidizing agents.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

### Section 11: Toxicological Information

**Routes of Entry:** Eye contact.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE.

Acute oral toxicity (LD50): 5000 mg/kg [Rat.].

Acute dermal toxicity (LD50): 12400 mg/kg [Rabbit.].

Acute toxicity of the vapor (LC50): 4550 ppm 4 hour(s) [Rat].

**Chronic Effects on Humans:** The substance is toxic to blood, kidneys, the nervous system, liver.

**Other Toxic Effects on Humans:**

Very hazardous in case of skin contact (irritant).

Slightly hazardous in case of skin contact (permeator), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

0347 Animal: embryotoxic, foetotoxic, passes through the placental barrier.  
0900 Detected in maternal milk in human.  
Narcotic effect; may cause nervous system disturbances.

**Special Remarks on other Toxic Effects on Humans:** Material is irritating to mucous membranes and upper respiratory tract.

### Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are more toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

### Section 14: Transport Information

**DOT Classification:** Class 3: Flammable liquid.

**Identification:** : Xylene : UN1307 PG: III

**Special Provisions for Transport:** Not available.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

Pennsylvania RTK: p-Xylene

Florida: p-Xylene

Massachusetts RTK: p-Xylene

New Jersey: p-Xylene

TSCA 8(b) inventory: p-Xylene

SARA 313 toxic chemical notification and release reporting: p-Xylene

CERCLA: Hazardous substances.: p-Xylene

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

CLASS D-2B: Material causing other toxic effects (TOXIC).

**DSCL (EEC):**

R10- Flammable.

R38- Irritating to skin.

R41- Risk of serious damage to eyes.

R48/20- Harmful: danger of serious

damage to health by prolonged exposure through inhalation.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 3

**Reactivity:** 0

**Personal Protection:** h

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 3

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.

Lab coat.

Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.

Splash goggles.

## Section 16: Other Information

**References:**


- Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987.
- Material safety data sheet emitted by: la Commission de la Santé et de la Sécurité du Travail du Québec.
- SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984.
- The Sigma-Aldrich Library of Chemical Safety Data, Edition II.
- Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:33 PM

**Last Updated:** 10/10/2005 08:33 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	3
Reactivity	0
Personal Protection	J

## Material Safety Data Sheet m-Xylene MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** m-Xylene

**Catalog Codes:** SLX1066

**CAS#:** 108-38-3

**RTECS:** ZE2275000

**TSCA:** TSCA 8(b) inventory: m-Xylene

**CI#:** Not applicable.

**Synonym:** m-Methyltoluene

**Chemical Name:** 1,3-Dimethylbenzene

**Chemical Formula:** C<sub>6</sub>H<sub>4</sub>(CH<sub>3</sub>)<sub>2</sub>

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
{m-}Xylene	108-38-3	100

**Toxicological Data on Ingredients:** m-Xylene: ORAL (LD50): Acute: 5000 mg/kg [Rat.]. DERMAL (LD50): Acute: 14100 mg/kg [Rabbit].

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Very hazardous in case of skin contact (irritant), of eye contact (irritant). Slightly hazardous in case of skin contact (permeator), of ingestion, of inhalation. Inflammation of the eye is characterized by redness, watering, and itching. Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.

**Potential Chronic Health Effects:**

Hazardous in case of skin contact (irritant), of eye contact (irritant).

Slightly hazardous in case of skin contact (permeator), of ingestion, of inhalation.

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

The substance is toxic to blood, kidneys, the nervous system, liver.

Repeated or prolonged exposure to the substance can produce target organs damage.

## Section 4: First Aid Measures

**Eye Contact:** Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 527°C (980.6°F)

**Flash Points:** CLOSED CUP: 25°C (77°F). OPEN CUP: 28.9°C (84°F) (Cleveland).

**Flammable Limits:** LOWER: 1.1% UPPER: 7%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:** Highly flammable in presence of open flames and sparks, of heat.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable liquid, insoluble in water.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:**

Explosive in the form of vapor when exposed to heat or flame. Vapor may travel considerable distance to source of ignition and flash back. When heated to decomposition it emits acrid smoke and irritating fumes.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Flammable liquid, insoluble in water.

Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not get water inside container. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

### Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes Keep away from incompatibles such as oxidizing agents.

### Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. A refrigerated room would be preferable for materials with a flash point lower than 37.8°C (100°F).

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:** Splash goggles. Lab coat. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Boots. Gloves. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 100 STEL: 150 (ppm) from ACGIH (TLV)

TWA: 434 STEL: 651 (mg/m3) from ACGIH Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid. (Liquid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 106.17 g/mole

**Color:** Colorless.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 139.3°C (282.7°F)

**Melting Point:** -47.87°C (-54.2°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 0.86 (Water = 1)

**Vapor Pressure:** 6 mm of Hg (@ 20°C)

**Vapor Density:** 3.7 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 0.62 ppm

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** See solubility in water, methanol, diethyl ether.

**Solubility:**

Easily soluble in methanol, diethyl ether.

Insoluble in cold water, hot water.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Reactive with oxidizing agents.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

### Section 11: Toxicological Information

**Routes of Entry:** Eye contact.

**Toxicity to Animals:**

Acute oral toxicity (LD50): 5000 mg/kg [Rat.].

Acute dermal toxicity (LD50): 14100 mg/kg [Rabbit.].

**Chronic Effects on Humans:** The substance is toxic to blood, kidneys, the nervous system, liver.

**Other Toxic Effects on Humans:**

Very hazardous in case of skin contact (irritant).

Slightly hazardous in case of skin contact (permeator), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

0347 Animal: embryotoxic, foetotoxic, passes through the placental barrier.

0900 Detected in maternal milk in human.

Narcotic effect; may cause nervous system disturbances.

**Special Remarks on other Toxic Effects on Humans:** Material is irritating to mucous membranes and upper respiratory tract.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are more toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

## Section 14: Transport Information

**DOT Classification:** Class 3: Flammable liquid.

**Identification:** : Xylene : UN1307 PG: III

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

Pennsylvania RTK: m-Xylene

Massachusetts RTK: m-Xylene

TSCA 8(b) inventory: m-Xylene

SARA 313 toxic chemical notification and release reporting: m-Xylene

CERCLA: Hazardous substances.: m-Xylene

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F).

CLASS D-2B: Material causing other toxic effects (TOXIC).

**DSCL (EEC):**

R10- Flammable.

R38- Irritating to skin.

R41- Risk of serious damage to eyes.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 3

**Reactivity:** 0

**Personal Protection:** j

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 3

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.  
Lab coat.  
Wear appropriate respirator when ventilation is inadequate.  
Splash goggles.

## Section 16: Other Information

**References:**


- Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987.
- Material safety data sheet emitted by: la Commission de la Santé et de la Sécurité du Travail du Québec.
- SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984.
- The Sigma-Aldrich Library of Chemical Safety Data, Edition II.
- Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:33 PM

**Last Updated:** 10/10/2005 08:33 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	0
Fire	2
Reactivity	0
Personal Protection	H

## Material Safety Data Sheet Mesitylene MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Mesitylene

**Catalog Codes:** SLM2410

**CAS#:** 108-67-8

**RTECS:** OX6825000

**TSCA:** TSCA 8(b) inventory: Mesitylene

**CI#:** Not available.

**Synonym:** 1,3,5-Trimethylbenzene

**Chemical Formula:** C9H12

**Contact Information:**

**Sciencelab.com, Inc.**  
14025 Smith Rd.  
Houston, Texas 77396

US Sales: **1-800-901-7247**  
International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Mesitylene	108-67-8	100

**Toxicological Data on Ingredients:** Mesitylene: VAPOR (LC50): Acute: 4881.9 ppm 4 hour(s) [Rat].

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of eye contact (irritant), of ingestion, of inhalation (lung irritant). Slightly hazardous in case of skin contact (irritant, permeator), .

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

Repeated or prolonged exposure is not known to aggravate medical condition.

### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes,

keeping eyelids open. Cold water may be used. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:** Not available.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 559°C (1038.2°F)

**Flash Points:** CLOSED CUP: 43°C (109.4°F).

**Flammable Limits:** Not available.

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:** Not available.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable liquid, soluble or dispersed in water.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use alcohol foam, water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:** Not available.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Flammable liquid.

Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Be careful that the product is not present at a

concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

### Precautions:

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapour/spray. Avoid contact with eyes. Wear suitable protective clothing. If ingested, seek medical advice immediately and show the container or the label.

### Storage:

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. Keep container dry. Keep in a cool place.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

### Personal Protection:

Splash goggles. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 25 CEIL: 35 (ppm)

TWA: 125 CEIL: 170 (mg/m<sup>3</sup>)

Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid.

**Odor:** Aromatic.

**Taste:** Not available.

**Molecular Weight:** 120.2 g/mole

**Color:** Not available.

**pH (1% soln/water):** Not available.

**Boiling Point:** 164.7°C (328.5°F)

**Melting Point:** -44.8°C (-48.6°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 0.8637 (Water = 1)

**Vapor Pressure:** 1.86 mm of Hg (@ 20°C)

**Vapor Density:** 4.14 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 0.23 ppm

**Water/Oil Dist. Coeff.:** The product is equally soluble in oil and water;  $\log(\text{oil/water}) = 0$

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Very slightly soluble in cold water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Not available.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

## Section 11: Toxicological Information

**Routes of Entry:** Eye contact. Ingestion.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE.  
Acute toxicity of the vapor (LC50): 4881.9 ppm 4 hour(s) [Rat].

**Chronic Effects on Humans:** Not available.

**Other Toxic Effects on Humans:**

Hazardous in case of ingestion, of inhalation (lung irritant).  
Slightly hazardous in case of skin contact (irritant, permeator), .

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:** Not available.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are more toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

**Section 13: Disposal Considerations**

**Waste Disposal:**

**Section 14: Transport Information**

**DOT Classification:** Class 3: Flammable liquid.

**Identification:** : 1,3,5-Trimethylbenzene : UN2325 PG: III

**Special Provisions for Transport:** Marine Pollutant

**Section 15: Other Regulatory Information****Federal and State Regulations:**

Florida: Mesitylene

New Jersey: Mesitylene

TSCA 8(b) inventory: Mesitylene

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:****WHMIS (Canada):**

CLASS B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).

**DSCL (EEC):**

R10- Flammable.

R36/37- Irritating to eyes and respiratory system.

**HMIS (U.S.A.):**

**Health Hazard:** 0

**Fire Hazard:** 2

**Reactivity:** 0

**Personal Protection:** h

**National Fire Protection Association (U.S.A.):**

**Health:** 0

**Flammability:** 2

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.

Lab coat.

Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.

Splash goggles.

### Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 06:06 PM

**Last Updated:** 10/09/2005 06:06 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

# International Chemical Safety Cards

## BENZO(B)FLUORANTHENE

ICSC: 0720

BENZO(B)FLUORANTHENE Benzo(e)acephenanthrylene 2,3-Benzofluoroanthene $C_{20}H_{12}$ Molecular mass: 252.3  CAS # 205-99-2 RTECS # CU1400000 ICSC # 0720			
TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
<b>FIRE</b>	Combustible.	NO open flames.	Water spray, powder.
<b>EXPLOSION</b>			
<b>EXPOSURE</b>		PREVENT DISPERSION OF DUST! STRICT HYGIENE! AVOID ALL CONTACT!	IN ALL CASES CONSULT A DOCTOR!
• <b>INHALATION</b>		Local exhaust or breathing protection.	Fresh air, rest.
• <b>SKIN</b>	MAY BE ABSORBED!	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention. Wear protective gloves when administering first aid.
• <b>EYES</b>		Safety goggles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• <b>INGESTION</b>		Do not eat, drink, or smoke during work.	Wear protective gloves when inducing vomiting. Induce vomiting (ONLY IN CONSCIOUS PERSONS!). Refer for medical attention.
SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING	
Sweep spilled substance into containers. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Tightly closed.	Unbreakable packaging; put breakable packaging into closed unbreakable container.	
<b>SEE IMPORTANT INFORMATION ON BACK</b>			
<b>ICSC: 0720</b>	Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities © IPCS CEC 1993		

# International Chemical Safety Cards

**BENZO(B)FLUORANTHENE**

ICSC: 0720

<b>I M P O R T A N T  D A T A</b>	<p><b>PHYSICAL STATE; APPEARANCE:</b> COLOURLESS TO YELLOW CRYSTALS.</p> <p><b>PHYSICAL DANGERS:</b></p> <p><b>CHEMICAL DANGERS:</b> Upon heating, toxic fumes are formed.</p> <p><b>OCCUPATIONAL EXPOSURE LIMITS (OELs):</b> TLV not established.</p>	<p><b>ROUTES OF EXPOSURE:</b> The substance can be absorbed into the body by inhalation of its aerosol and through the skin.</p> <p><b>INHALATION RISK:</b> Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.</p> <p><b>EFFECTS OF SHORT-TERM EXPOSURE:</b></p> <p><b>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:</b> This substance is possibly carcinogenic to humans.</p>		
<b>PHYSICAL PROPERTIES</b>	Melting point: 168°C Solubility in water: none	Vapour pressure, Pa at 20°C: <10 Octanol/water partition coefficient as log Pow: 6.04		
<b>ENVIRONMENTAL DATA</b>	This substance may be hazardous to the environment; special attention should be given to the total environment. In the food chain important to humans, bioaccumulation takes place, specifically in oils and fats.			
<b>NOTES</b>				
Depending on the degree of exposure, periodic medical examination is indicated. Data are insufficiently available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home.				
<b>ADDITIONAL INFORMATION</b>				
<table border="1" style="width: 100%; height: 20px;"> <tr> <td style="width: 50%;"></td> <td style="width: 50%;"></td> </tr> </table>				
<b>ICSC: 0720</b>		<b>BENZO(B)FLUORANTHENE</b>		
© IPCS, CEC, 1993				

<b>IMPORTANT LEGAL NOTICE:</b>	Neither the CEC or the IPCS nor any person acting on behalf of the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use.
--------------------------------	--

# International Chemical Safety Cards

## BENZO(K)FLUORANTHENE

ICSC: 0721

BENZO(K)FLUOROANTHENE 11,12-Benzofluoroanthene Dibenzo(b,j,k)fluorene $C_{20}H_{12}$ Molecular mass: 252.3  CAS # 207-08-9 RTECS # DF6350000 ICSC # 0721			
TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
<b>FIRE</b>	Combustible.	NO open flames.	Water spray, powder.
<b>EXPLOSION</b>			
<b>EXPOSURE</b>		PREVENT DISPERSION OF DUST! STRICT HYGIENE! AVOID ALL CONTACT!	IN ALL CASES CONSULT A DOCTOR!
• <b>INHALATION</b>		Local exhaust or breathing protection.	Fresh air, rest. Refer for medical attention.
• <b>SKIN</b>	MAY BE ABSORBED!	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention. Wear protective gloves when administering first aid.
• <b>EYES</b>		Safety goggles or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• <b>INGESTION</b>		Do not eat, drink, or smoke during work.	Wear protective gloves when inducing vomiting. Induce vomiting (ONLY IN CONSCIOUS PERSONS!). Refer for medical attention.
SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING	
Sweep spilled substance into containers. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Separated from strong oxidants. Tightly closed.		
<b>SEE IMPORTANT INFORMATION ON BACK</b>			
<b>ICSC: 0721</b>	Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities © IPCS CEC 1993		

# International Chemical Safety Cards

**BENZO(K)FLUORANTHENE**

ICSC: 0721

<b>I M P O R T A N T  D A T A</b>	<p><b>PHYSICAL STATE; APPEARANCE:</b> YELLOW CRYSTALS.</p> <p><b>PHYSICAL DANGERS:</b></p> <p><b>CHEMICAL DANGERS:</b> Upon heating, toxic fumes are formed. Reacts with strong oxidants.</p> <p><b>OCCUPATIONAL EXPOSURE LIMITS (OELs):</b> TLV not established.</p>	<p><b>ROUTES OF EXPOSURE:</b> The substance can be absorbed into the body by inhalation of its aerosol and through the skin.</p> <p><b>INHALATION RISK:</b> Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.</p> <p><b>EFFECTS OF SHORT-TERM EXPOSURE:</b></p> <p><b>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:</b> This substance is possibly carcinogenic to humans.</p>
<b>PHYSICAL PROPERTIES</b>	Boiling point: 480°C Melting point: 215.7°C	Solubility in water: none Octanol/water partition coefficient as log Pow: 6.84
<b>ENVIRONMENTAL DATA</b>	This substance may be hazardous to the environment; special attention should be given to the total environment. In the food chain important to humans, bioaccumulation takes place, specifically in oils and fats.	
<b>NOTES</b>		
Data are insufficiently available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home.		
<b>ADDITIONAL INFORMATION</b>		
© IPCS, CEC, 1993		
<b>ICSC: 0721</b>		<b>BENZO(K)FLUORANTHENE</b>

<b>IMPORTANT LEGAL NOTICE:</b>	Neither the CEC or the IPCS nor any person acting on behalf of the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use.
--------------------------------	--

# International Chemical Safety Cards

## BENZ(a)ANTHRACENE

ICSC: 0385

### BENZ(a)ANTHRACENE

1,2-Benzoanthracene

Benzo(a)anthracene

2,3-Benzphenanthrene

Naphthanthracene

C<sub>18</sub>H<sub>12</sub>

Molecular mass: 228.3

CAS # 56-55-3

RTECS # CV9275000

ICSC # 0385

EC # 601-033-00-9

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
<b>FIRE</b>	Combustible.		Water spray, powder. In case of fire in the surroundings: all extinguishing agents allowed.
<b>EXPLOSION</b>	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
<b>EXPOSURE</b>		AVOID ALL CONTACT!	
• <b>INHALATION</b>		Local exhaust or breathing protection.	Fresh air, rest.
• <b>SKIN</b>		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• <b>EYES</b>		Safety goggles, face shield, or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• <b>INGESTION</b>		Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth.
SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING	
Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place (extra personal protection: complete protective clothing including self-contained breathing apparatus).	Well closed.	T symbol R: 45 S: 53-45	

## SEE IMPORTANT INFORMATION ON BACK

ICSC: 0385

Prepared in the context of cooperation between the International Programme on Chemical Safety &amp; the Commission of the European Communities © IPCS CEC 1993

## International Chemical Safety Cards

## BENZ(a)ANTHRACENE

ICSC: 0385

I M P O R T A N T  D A T A	<p><b>PHYSICAL STATE; APPEARANCE:</b> COLOURLESS TO YELLOW-BROWN FLUORESCENT FLAKES OR POWDER.</p> <p><b>PHYSICAL DANGERS:</b> Dust explosion possible if in powder or granular form, mixed with air.</p> <p><b>CHEMICAL DANGERS:</b></p> <p><b>OCCUPATIONAL EXPOSURE LIMITS (OELs):</b> TLV not established.</p>	<p><b>ROUTES OF EXPOSURE:</b> The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p><b>INHALATION RISK:</b> Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.</p> <p><b>EFFECTS OF SHORT-TERM EXPOSURE:</b></p> <p><b>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:</b> This substance is probably carcinogenic to humans.</p>
	<p><b>PHYSICAL PROPERTIES</b></p>	<p>Sublimation point: 435°C Melting point: 162°C Relative density (water = 1): 1.274</p>
<b>ENVIRONMENTAL DATA</b>	In the food chain important to humans, bioaccumulation takes place, specifically in seafood.	
<b>NOTES</b>		
This substance is one of many polycyclic aromatic hydrocarbons - standards are usually established for them as mixtures, e.g., coal tar pitch volatiles. However, it may be encountered as a laboratory chemical in its pure form. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home. Tetraphene is a common name.		
<b>ADDITIONAL INFORMATION</b>		
ICSC: 0385		BENZ(a)ANTHRACENE
© IPCS, CEC, 1993		

**IMPORTANT  
LEGAL  
NOTICE:**

Neither the CEC or the IPCS nor any person acting on behalf of the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use.

# Material Safety Data Sheet

Benzo[a]pyrene, 98%

ACC# 37175

## Section 1 - Chemical Product and Company Identification

**MSDS Name:** Benzo[a]pyrene, 98%

**Catalog Numbers:** AC105600000, AC105600010, AC105601000, AC377200000, AC377200010, AC377201000 AC377201000

**Synonyms:** 3,4-Benzopyrene; 3,4-Benzpyrene; Benzo[def]chrysene.

**Company Identification:**

Acros Organics N.V.  
One Reagent Lane  
Fair Lawn, NJ 07410

**For information in North America, call:** 800-ACROS-01

**For emergencies in the US, call CHEMTREC:** 800-424-9300

## Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
50-32-8	Benzo[a]pyrene	>96	200-028-5

## Section 3 - Hazards Identification

### EMERGENCY OVERVIEW

Appearance: yellow to brown powder.

**Danger!** May cause harm to the unborn child. May impair fertility. May cause eye, skin, and respiratory tract irritation. Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Cancer hazard. May cause allergic skin reaction. May cause heritable genetic damage.

**Target Organs:** Reproductive system, skin.

#### Potential Health Effects

**Eye:** May cause eye irritation.

**Skin:** May cause skin irritation. May be harmful if absorbed through the skin. May cause an allergic reaction in certain individuals.

**Ingestion:** May cause irritation of the digestive tract. The toxicological properties of this substance have not been fully investigated. May be harmful if swallowed.

**Inhalation:** May cause respiratory tract irritation. The toxicological properties of this substance have not been fully investigated. May be harmful if inhaled.

**Chronic:** May cause cancer in humans. May cause reproductive and fetal effects. Laboratory experiments have resulted in mutagenic effects.

## Section 4 - First Aid Measures

**Eyes:** Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

**Skin:** Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

**Ingestion:** Never give anything by mouth to an unconscious person. Get medical aid. Do NOT induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cupfuls of milk or water.

**Inhalation:** Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

**Notes to Physician:** Treat symptomatically and supportively.

## Section 5 - Fire Fighting Measures

**General Information:** As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

**Extinguishing Media:** Use water spray, dry chemical, carbon dioxide, or appropriate foam.

**Flash Point:** Not available.

**Autoignition Temperature:** Not available.

**Explosion Limits, Lower:** Not available.

**Upper:** Not available.

**NFPA Rating:** (estimated) Health: 2; Flammability: 0; Instability: 0

## Section 6 - Accidental Release Measures

**General Information:** Use proper personal protective equipment as indicated in Section 8.

**Spills/Leaks:** Clean up spills immediately, observing precautions in the Protective Equipment section. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions. Provide ventilation.

## Section 7 - Handling and Storage

**Handling:** Wash thoroughly after handling. Use with adequate ventilation. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Keep container tightly closed. Avoid ingestion and inhalation.

**Storage:** Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances.

## Section 8 - Exposure Controls, Personal Protection

**Engineering Controls:** Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low.

### Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs

Benzo[a]pyrene	0.2 mg/m <sup>3</sup> TWA (as benzene soluble aerosol) (listed under Coal tar pitches).	0.1 mg/m <sup>3</sup> TWA (cyclohexane-extractable fraction) (listed under Coal tar pitches).80 mg/m <sup>3</sup> IDLH (listed under Coal tar pitches).	0.2 mg/m <sup>3</sup> TWA (as benzene soluble fraction) (listed under Coal tar pitches).
----------------	---	---	--

**OSHA Vacated PELs:** Benzo[a]pyrene: No OSHA Vacated PELs are listed for this chemical.

**Personal Protective Equipment**

**Eyes:** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin:** Wear appropriate protective gloves to prevent skin exposure.

**Clothing:** Wear appropriate protective clothing to prevent skin exposure.

**Respirators:** A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

## Section 9 - Physical and Chemical Properties

**Physical State:** Powder

**Appearance:** yellow to brown

**Odor:** faint aromatic odor

**pH:** Not available.

**Vapor Pressure:** Not available.

**Vapor Density:** Not available.

**Evaporation Rate:**Not available.

**Viscosity:** Not available.

**Boiling Point:** 495 deg C @ 760 mm Hg

**Freezing/Melting Point:**175 - 179 deg C

**Decomposition Temperature:**Not available.

**Solubility:** 1.60x10<sup>-3</sup> mg/l @25°C

**Specific Gravity/Density:**Not available.

**Molecular Formula:**C<sub>20</sub>H<sub>12</sub>

**Molecular Weight:**252.31

## Section 10 - Stability and Reactivity

**Chemical Stability:** Stable under normal temperatures and pressures.

**Conditions to Avoid:** Dust generation.

**Incompatibilities with Other Materials:** Strong oxidizing agents.

**Hazardous Decomposition Products:** Carbon monoxide, carbon dioxide.

**Hazardous Polymerization:** Has not been reported.

## Section 11 - Toxicological Information

**RTECS#:**

**CAS#** 50-32-8: DJ3675000

**LD50/LC50:**

Not available.

**Carcinogenicity:**

CAS# 50-32-8:

- **ACGIH:** A2 - Suspected Human Carcinogen
- **California:** carcinogen, initial date 7/1/87
- **NTP:** Suspect carcinogen
- **IARC:** Group 1 carcinogen (listed as Coal tar pitches).

**Epidemiology:** No information found

**Teratogenicity:** No information found

**Reproductive Effects:** Adverse reproductive effects have occurred in experimental animals.

**Mutagenicity:** Mutagenic effects have occurred in humans. Mutagenic effects have occurred in experimental animals.

**Neurotoxicity:** No information found

**Other Studies:**

## Section 12 - Ecological Information

No information available.

## Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

**RCRA P-Series:** None listed.

**RCRA U-Series:**

CAS# 50-32-8: waste number U022.

## Section 14 - Transport Information

	US DOT	Canada TDG
<b>Shipping Name:</b>	NOT REGULATED FOR DOMESTIC TRANSPORT	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOL (Benzo{a} pyrene)
<b>Hazard Class:</b>		9
<b>UN Number:</b>		UN3077
<b>Packing Group:</b>		III

## Section 15 - Regulatory Information

**US FEDERAL**

**TSCA**

CAS# 50-32-8 is listed on the TSCA inventory.

#### **Health & Safety Reporting List**

None of the chemicals are on the Health & Safety Reporting List.

#### **Chemical Test Rules**

None of the chemicals in this product are under a Chemical Test Rule.

#### **Section 12b**

None of the chemicals are listed under TSCA Section 12b.

#### **TSCA Significant New Use Rule**

None of the chemicals in this material have a SNUR under TSCA.

#### **CERCLA Hazardous Substances and corresponding RQs**

CAS# 50-32-8: 1 lb final RQ; 0.454 kg final RQ

#### **SARA Section 302 Extremely Hazardous Substances**

None of the chemicals in this product have a TPO.

#### **SARA Codes**

CAS # 50-32-8: immediate, delayed.

#### **Section 313**

This material contains Benzo[a]pyrene (CAS# 50-32-8, >96%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR

#### **Clean Air Act:**

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

#### **Clean Water Act:**

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

CAS# 50-32-8 is listed as a Priority Pollutant under the Clean Water Act.

None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

#### **OSHA:**

None of the chemicals in this product are considered highly hazardous by OSHA.

#### **STATE**

CAS# 50-32-8 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

#### **California Prop 65**

#### **The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:**

WARNING: This product contains Benzo[a]pyrene, a chemical known to the state of California to cause cancer.

California No Significant Risk Level: CAS# 50-32-8: 0.06 æg/day NSRL

### **European/International Regulations**

#### **European Labeling in Accordance with EC Directives**

#### **Hazard Symbols:**

T N

#### **Risk Phrases:**

R 43 May cause sensitization by skin contact.

R 45 May cause cancer.

R 46 May cause heritable genetic damage.

R 60 May impair fertility.

R 61 May cause harm to the unborn child.

R 50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

#### **Safety Phrases:**

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

- S 53 Avoid exposure - obtain special instructions before use.  
S 60 This material and its container must be disposed of as hazardous waste.  
S 61 Avoid release to the environment. Refer to special instructions /safety data sheets.

**WGK (Water Danger/Protection)**

CAS# 50-32-8: No information available.

**Canada - DSL/NDSL**

CAS# 50-32-8 is listed on Canada's DSL List.

**Canada - WHMIS**

This product has a WHMIS classification of D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

**Canadian Ingredient Disclosure List**

CAS# 50-32-8 is listed on the Canadian Ingredient Disclosure List.

<b>Section 16 - Additional Information</b>
--

**MSDS Creation Date:** 9/02/1997

**Revision #7 Date:** 6/30/2006

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.*

# Material Safety Data Sheet

## Chrysene, 98%

ACC# 95251

### Section 1 - Chemical Product and Company Identification

**MSDS Name:** Chrysene, 98%**Catalog Numbers:** AC224140000, AC224140010, AC224140050, AC224145000**Synonyms:** 1,2-Benzophenanthrene; Benzo(a)phenanthrene; 1,2,5,6-Dibenzonaphthalene.**Company Identification:**

Acros Organics N.V.  
One Reagent Lane  
Fair Lawn, NJ 07410

**For information in North America, call:** 800-ACROS-01**For emergencies in the US, call CHEMTREC:** 800-424-9300

### Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
218-01-9	Chrysene	98	205-923-4

### Section 3 - Hazards Identification

#### EMERGENCY OVERVIEW

Appearance: very light beige solid.

**Caution!** May cause eye and skin irritation. May cause respiratory tract irritation. May cause cancer in humans.**Target Organs:** Liver, skin.**Potential Health Effects****Eye:** May cause eye irritation.**Skin:** May cause skin irritation.**Ingestion:** May cause gastrointestinal irritation with nausea, vomiting and diarrhea.**Inhalation:** May cause respiratory tract irritation.**Chronic:** May cause cancer according to animal studies.

### Section 4 - First Aid Measures

**Eyes:** Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.**Skin:** Get medical aid. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.**Ingestion:** Do not induce vomiting. If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid immediately.**Inhalation:** Get medical aid immediately. Remove from exposure and move to fresh air

immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen.

**Notes to Physician:** Treat symptomatically and supportively.

## Section 5 - Fire Fighting Measures

**General Information:** As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. This material in sufficient quantity and reduced particle size is capable of creating a dust explosion.

**Extinguishing Media:** Use water spray, dry chemical, carbon dioxide, or chemical foam.

**Flash Point:** Not applicable.

**Autoignition Temperature:** Not available.

**Explosion Limits, Lower:** Not available.

**Upper:** Not available.

**NFPA Rating:** (estimated) Health: ; Flammability: 1; Instability:

## Section 6 - Accidental Release Measures

**General Information:** Use proper personal protective equipment as indicated in Section 8.

**Spills/Leaks:** Vacuum or sweep up material and place into a suitable disposal container. Clean up spills immediately, observing precautions in the Protective Equipment section. Wear a self contained breathing apparatus and appropriate personal protection. (See Exposure Controls, Personal Protection section). Provide ventilation.

## Section 7 - Handling and Storage

**Handling:** Wash thoroughly after handling. Wash hands before eating. Avoid contact with eyes, skin, and clothing. Use only with adequate ventilation. Avoid breathing dust.

**Storage:** Store in a tightly closed container. Store in a cool, dry area away from incompatible substances.

## Section 8 - Exposure Controls, Personal Protection

**Engineering Controls:** Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels.

### Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Chrysene	0.2 mg/m <sup>3</sup> TWA (as benzene soluble aerosol) (listed under Coal tar pitches).	0.1 mg/m <sup>3</sup> TWA (cyclohexane-extractable fraction) (listed under Coal tar pitches). 80 mg/m <sup>3</sup> IDLH (listed under Coal tar pitches).	0.2 mg/m <sup>3</sup> TWA (as benzene soluble fraction) (listed under Coal tar pitches).

**OSHA Vacated PELs:** Chrysene: No OSHA Vacated PELs are listed for this chemical.

**Personal Protective Equipment**

**Eyes:** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin:** Wear appropriate protective gloves to prevent skin exposure.

**Clothing:** Wear appropriate protective clothing to prevent skin exposure.

**Respirators:** Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

## Section 9 - Physical and Chemical Properties

**Physical State:** Solid

**Appearance:** very light beige

**Odor:** Not available.

**pH:** Not available.

**Vapor Pressure:** Not available.

**Vapor Density:** Not available.

**Evaporation Rate:** Not available.

**Viscosity:** Not available.

**Boiling Point:** 448 deg C @ 760 mm Hg

**Freezing/Melting Point:** 250-255 deg C

**Decomposition Temperature:** Not available.

**Solubility:** insoluble

**Specific Gravity/Density:** Not available.

**Molecular Formula:** C<sub>18</sub>H<sub>12</sub>

**Molecular Weight:** 228.29

## Section 10 - Stability and Reactivity

**Chemical Stability:** Stable under normal temperatures and pressures.

**Conditions to Avoid:** Dust generation.

**Incompatibilities with Other Materials:** Strong oxidizing agents.

**Hazardous Decomposition Products:** Carbon monoxide, carbon dioxide.

**Hazardous Polymerization:** Has not been reported.

## Section 11 - Toxicological Information

**RTECS#:**

**CAS#** 218-01-9: GC0700000

**LD50/LC50:**

Not available.

**Carcinogenicity:**

CAS# 218-01-9:

- **ACGIH:** A3 - Confirmed animal carcinogen with unknown relevance to humans

- **California:** carcinogen, initial date 1/1/90
- **NTP:** Known carcinogen (listed as Coal tar pitches).
- **IARC:** Group 1 carcinogen (listed as Coal tar pitches).

**Epidemiology:** No information found

**Teratogenicity:** No information found

**Reproductive Effects:** No information found

**Mutagenicity:** Chrysene was mutagenic to *S. Typhimurium* in the presence of an exogenous metabolic system.

**Neurotoxicity:** No information found

**Other Studies:**

## Section 12 - Ecological Information

**Ecotoxicity:** Water flea LC50 = 1.9 mg/L; 2 Hr.; Unspecified Fish toxicity : LC50 (96hr) *Neaethes arenacedentata* >1ppm. (Rossi, S.S. et al *Marine Pollut. Bull.* 1978) Invertebrate toxicity : lethal treshold concentration (24hr) *Daphnia Magna* 0,7æg/l. (\* Newsted, J.L. et al *Environ. Toxicol. Chem.* 1987) Bioaccumulation : 24hr *Daphnia Magna* log bioconcentration factor 3.7845 (\*)

**Environmental:** Degradation studies : biodegradated by white rot fungus (Proc. Annu. Meet. Am. Wood-Preserv. Assoc. 1989) May be utilised by axenic cultures of microorganisms e.g. *Pseudomonas pancimobilis* EPA505, which may have novel degradative systems (Mueller, J.G. et al *ppl. Environ. Microbiol.* 1990; Mueller, J.G. et al *Environ. Sci. Technol.* 1991).

**Physical:** Not found.

**Other:** No information available.

## Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

**RCRA P-Series:** None listed.

**RCRA U-Series:**

CAS# 218-01-9: waste number U050.

## Section 14 - Transport Information

	US DOT	Canada TDG
<b>Shipping Name:</b>	Not regulated as a hazardous material	No information available.
<b>Hazard Class:</b>		
<b>UN Number:</b>		
<b>Packing Group:</b>		

## Section 15 - Regulatory Information

## US FEDERAL

### TSCA

CAS# 218-01-9 is listed on the TSCA inventory.

### Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

### Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

### Section 12b

None of the chemicals are listed under TSCA Section 12b.

### TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

### CERCLA Hazardous Substances and corresponding RQs

CAS# 218-01-9: 100 lb final RQ; 45.4 kg final RQ

### SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPO.

### Section 313

This material contains Chrysene (CAS# 218-01-9, 98%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

### Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depleters.

This material does not contain any Class 2 Ozone depleters.

### Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

CAS# 218-01-9 is listed as a Priority Pollutant under the Clean Water Act.

None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

### OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

### STATE

CAS# 218-01-9 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, Massachusetts.

### California Prop 65

### The following statement(s) is(are) made in order to comply with the California Safe Drinking Water Act:

WARNING: This product contains Chrysene, a chemical known to the state of California to cause cancer.

California No Significant Risk Level: CAS# 218-01-9: 0.35 æg/day NSRL (oral)

## European/International Regulations

### European Labeling in Accordance with EC Directives

#### Hazard Symbols:

T

#### Risk Phrases:

R 45 May cause cancer.

R 50/53 Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

#### Safety Phrases:

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

S 53 Avoid exposure - obtain special instructions before use.

S 60 This material and its container must be disposed of as hazardous waste.

S 61 Avoid release to the environment. Refer to special instructions /safety data sheets.

**WGK (Water Danger/Protection)**

CAS# 218-01-9: No information available.

**Canada - DSL/NDSL**

CAS# 218-01-9 is listed on Canada's DSL List.

**Canada - WHMIS**

This product has a WHMIS classification of D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

**Canadian Ingredient Disclosure List**

CAS# 218-01-9 is listed on the Canadian Ingredient Disclosure List.

<b>Section 16 - Additional Information</b>
--

**MSDS Creation Date:** 6/30/1999

**Revision #4 Date:** 10/03/2005

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.*

# Material Safety Data Sheet

## Fluoranthene, 98%

ACC# 80991

### Section 1 - Chemical Product and Company Identification

**MSDS Name:** Fluoranthene, 98%**Catalog Numbers:** AC119170000, AC119170250, AC119171000, AC119175000**Synonyms:** 1,2-(1,8-Naphthalenediyl)benzene; 1,2-(1,8-Naphthylene)benzene; 1,2-Benzacenaphthene; Benzene, 1,2-(1,8-naphthylene)-; Benzo(j,k)fluorene; Benzo(jk)fluoranthene; Benzo(jk)fluorene**Company Identification:**

Acros Organics N.V.  
One Reagent Lane  
Fair Lawn, NJ 07410

**For information in North America, call:** 800-ACROS-01**For emergencies in the US, call CHEMTREC:** 800-424-9300

### Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
206-44-0	Fluoranthene	98	205-912-4

### Section 3 - Hazards Identification

#### EMERGENCY OVERVIEW

Appearance: yellow needles.

**Caution!** Harmful. Causes eye and skin irritation and possible burns. May be harmful if absorbed through the skin. May be harmful if swallowed. May cause heart and liver injury.**Target Organs:** Heart, liver, lungs.**Potential Health Effects****Eye:** Causes eye irritation and possible burns.**Skin:** May be harmful if absorbed through the skin. Causes severe skin irritation and possible burns.**Ingestion:** May be harmful if swallowed. May cause rapid heartbeat and cardiac arrhythmias. May cause liver injury, pulmonary edema, and respiratory arrest. May cause gastrointestinal disturbances such as nausea.**Inhalation:** May cause effects similar to those described for ingestion. May produce cardiac failure and pulmonary edema.**Chronic:** Prolonged or repeated skin contact may cause defatting and dermatitis.

### Section 4 - First Aid Measures

**Eyes:** Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the

upper and lower eyelids. Get medical aid immediately. Do NOT allow victim to rub eyes or keep eyes closed. Extensive irrigation with water is required (at least 30 minutes).

**Skin:** Get medical aid immediately. Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Remove contaminated clothing and shoes.

**Ingestion:** Never give anything by mouth to an unconscious person. Get medical aid immediately. Do NOT induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cups of milk or water.

**Inhalation:** Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

**Notes to Physician:** Treat symptomatically and supportively.

## Section 5 - Fire Fighting Measures

**General Information:** As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

**Extinguishing Media:** In case of fire, use water, dry chemical, chemical foam, or alcohol-resistant foam.

**Flash Point:** Not applicable.

**Autoignition Temperature:** Not applicable.

**Explosion Limits, Lower:** Not available.

**Upper:** Not available.

**NFPA Rating:** (estimated) Health: 2; Flammability: 0; Instability: 0

## Section 6 - Accidental Release Measures

**General Information:** Use proper personal protective equipment as indicated in Section 8.

**Spills/Leaks:** Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions. Provide ventilation.

## Section 7 - Handling and Storage

**Handling:** Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use only in a well-ventilated area. Do not get in eyes, on skin, or on clothing. Do not ingest or inhale. Use only in a chemical fume hood. Do not breathe dust.

**Storage:** Keep containers tightly closed. Store in a cool, dry area away from incompatible substances.

## Section 8 - Exposure Controls, Personal Protection

**Engineering Controls:** Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations low.

**Exposure Limits**

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Fluoranthene	none listed	none listed	none listed

**OSHA Vacated PELs:** Fluoranthene: No OSHA Vacated PELs are listed for this chemical.

**Personal Protective Equipment**

**Eyes:** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin:** Wear appropriate protective gloves and clothing to prevent skin exposure.

**Clothing:** Wear appropriate protective clothing to prevent skin exposure.

**Respirators:** A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements or European Standard EN 149 must be followed whenever workplace conditions warrant respirator use.

## Section 9 - Physical and Chemical Properties

**Physical State:** Needles

**Appearance:** yellow

**Odor:** None reported.

**pH:** Not available.

**Vapor Pressure:** 0.01 mm Hg @ 20 deg C

**Vapor Density:** Not available.

**Evaporation Rate:** Not available.

**Viscosity:** Not available.

**Boiling Point:** 384 deg C @ 760.00mmHg

**Freezing/Melting Point:** 107.00 - 110.00 deg C

**Decomposition Temperature:** Not available.

**Solubility:** insoluble

**Specific Gravity/Density:** 1.252 g/cm<sup>3</sup>

**Molecular Formula:** C<sub>16</sub>H<sub>10</sub>

**Molecular Weight:** 202.25

## Section 10 - Stability and Reactivity

**Chemical Stability:** Stable under normal temperatures and pressures.

**Conditions to Avoid:** Incompatible materials, strong oxidants.

**Incompatibilities with Other Materials:** Strong oxidizing agents.

**Hazardous Decomposition Products:** Carbon monoxide, carbon dioxide, acrid smoke and fumes.

**Hazardous Polymerization:** Has not been reported.

## Section 11 - Toxicological Information

**RTECS#:**

**CAS#** 206-44-0: LL4025000

**LD50/LC50:**

CAS# 206-44-0:

Oral, rat: LD50 = 2 gm/kg;

Skin, rabbit: LD50 = 3180 mg/kg;

**Carcinogenicity:**

CAS# 206-44-0: Not listed by ACGIH, IARC, NTP, or CA Prop 65.

**Epidemiology:** IARC Group 3: Limited or insufficient evidence for carcinogenicity in both animals and humans. Experimental tumorigenic data has been reported.

**Teratogenicity:** No information found

**Reproductive Effects:** No information found

**Mutagenicity:** Mutation in microorganisms: Salmonella typhimurium = 5ug/plate. Mutation in mammalian somatic cells: Human Lymphocyte = 2 umol/L.

**Neurotoxicity:** No information found

**Other Studies:**

## Section 12 - Ecological Information

**Ecotoxicity:** Fish: Bluegill/Sunfish: 3980 um/L; 96 H; (not specified) No data available.

**Environmental:** Remains in the upper few cm of soil, but can be transported to groundwater. Biodegrades from soil in a few years. Will not volatilize from soil or water. Rapidly absorbed to sediment and particulates and will readily bioconcentrate. Unadsorbed substance in water will degrade by photolysis in a days to weeks. Stable in sediment for decades or more. In the atmosphere, photodegrades with half life of 4 - 5 days, but may transport long distances without settling or raining out.

**Physical:** No information available.

**Other:** No information available.

## Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

**RCRA P-Series:** None listed.

**RCRA U-Series:**

CAS# 206-44-0: waste number U120.

## Section 14 - Transport Information

	US DOT	Canada TDG
<b>Shipping Name:</b>	Not regulated as a hazardous material	No information available.
<b>Hazard Class:</b>		
<b>UN Number:</b>		
<b>Packing Group:</b>		

## Section 15 - Regulatory Information

## US FEDERAL

### TSCA

CAS# 206-44-0 is listed on the TSCA inventory.

### Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

### Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

### Section 12b

None of the chemicals are listed under TSCA Section 12b.

### TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

### CERCLA Hazardous Substances and corresponding RQs

CAS# 206-44-0: 100 lb final RQ; 45.4 kg final RQ

### SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPO.

### SARA Codes

CAS # 206-44-0: immediate.

### Section 313

This material contains Fluoranthene (CAS# 206-44-0, 98%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

### Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

### Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

CAS# 206-44-0 is listed as a Priority Pollutant under the Clean Water Act. CAS# 206-44-0 is listed as a Toxic Pollutant under the Clean Water Act.

### OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

### STATE

CAS# 206-44-0 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Massachusetts.

### California Prop 65

California No Significant Risk Level: None of the chemicals in this product are listed.

## European/International Regulations

### European Labeling in Accordance with EC Directives

#### Hazard Symbols:

XN

#### Risk Phrases:

R 21/22 Harmful in contact with skin and if swallowed.

#### Safety Phrases:

S 22 Do not breathe dust.

S 24/25 Avoid contact with skin and eyes.

### WGK (Water Danger/Protection)

CAS# 206-44-0: No information available.

### Canada - DSL/NDSL

CAS# 206-44-0 is listed on Canada's NDSL List.

### Canada - WHMIS

This product has a WHMIS classification of D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

**Canadian Ingredient Disclosure List**

CAS# 206-44-0 is listed on the Canadian Ingredient Disclosure List.

<b>Section 16 - Additional Information</b>
--

**MSDS Creation Date:** 9/02/1997

**Revision #5 Date:** 10/03/2005

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.*

MSDS Number: **L2347** \* \* \* \* \* *Effective Date: 08/10/04* \* \* \* \* \* *Supersedes: 11/02/01*

# **MSDS** Material Safety Data Sheet

From: Mallinckrodt Baker, Inc.  
222 Red School Lane  
Phillipsburg, NJ 08865



24 Hour Emergency Telephone: 908-859-2151  
CHEMTREC: 1-800-424-9300

National Response in Canada  
CANUTEC: 613-996-6666

Outside U.S. and Canada  
Chemtrec: 703-527-3887

NOTE: CHEMTREC, CANUTEC and National Response Center emergency numbers to be used only in the event of chemical emergencies involving a spill, leak, fire, exposure or accident involving chemicals.

All non-emergency questions should be directed to Customer Service (1-800-582-2537) for assistance.

## LEAD METAL

### 1. Product Identification

**Synonyms:** Granular lead, pigment metal; C.I. 77575

**CAS No.:** 7439-92-1

**Molecular Weight:** 207.19

**Chemical Formula:** Pb

**Product Codes:**

J.T. Baker: 2256, 2266

Mallinckrodt: 5668

### 2. Composition/Information on Ingredients

Ingredient	CAS No	Percent	Hazardous
Lead	7439-92-1	95 - 100%	Yes

### 3. Hazards Identification

**Emergency Overview**

**POISON! DANGER! MAY BE FATAL IF SWALLOWED OR INHALED. CAUSES IRRITATION TO SKIN, EYES AND RESPIRATORY TRACT. NEUROTOXIN. AFFECTS THE GUM TISSUE, CENTRAL NERVOUS SYSTEM, KIDNEYS, BLOOD AND REPRODUCTIVE SYSTEM. POSSIBLE CANCER HAZARD. MAY CAUSE CANCER BASED ON ANIMAL DATA. Risk of cancer depends on duration and level of exposure.**

**J.T. Baker SAF-T-DATA<sup>(tm)</sup>** Ratings (Provided here for your convenience)

-----  
Health Rating: 3 - Severe (Life)

Flammability Rating: 0 - None

Reactivity Rating: 0 - None

Contact Rating: 1 - Slight

Lab Protective Equip: GOGGLES; LAB COAT; PROPER GLOVES

Storage Color Code: Blue (Health)  
-----

### **Potential Health Effects**

-----

#### **Inhalation:**

Lead can be absorbed through the respiratory system. Local irritation of bronchia and lungs can occur and, in cases of acute exposure, symptoms such as metallic taste, chest and abdominal pain, and increased lead blood levels may follow. See also Ingestion.

#### **Ingestion:**

POISON! The symptoms of lead poisoning include abdominal pain and spasms, nausea, vomiting, headache. Acute poisoning can lead to muscle weakness, "lead line" on the gums, metallic taste, definite loss of appetite, insomnia, dizziness, high lead levels in blood and urine with shock, coma and death in extreme cases.

#### **Skin Contact:**

Lead and lead compounds may be absorbed through the skin on prolonged exposure; the symptoms of lead poisoning described for ingestion exposure may occur. Contact over short periods may cause local irritation, redness and pain.

#### **Eye Contact:**

Absorption can occur through eye tissues but the more common hazards are local irritation or abrasion.

#### **Chronic Exposure:**

Lead is a cumulative poison and exposure even to small amounts can raise the body's content to toxic levels. The symptoms of chronic exposure are like those of ingestion poisoning; restlessness, irritability, visual disturbances, hypertension and gray facial color may also be noted.

#### **Aggravation of Pre-existing Conditions:**

Persons with pre-existing kidney, nerve or circulatory disorders or with skin or eye problems may be more susceptible to the effects of this substance.

---

## **4. First Aid Measures**

**Inhalation:**

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Ingestion:**

Induce vomiting immediately as directed by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention.

**Skin Contact:**

Immediately flush skin with plenty of soap and water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention. Wash clothing before reuse. Thoroughly clean shoes before reuse.

**Eye Contact:**

Immediately flush eyes with plenty of water for at least 15 minutes, lifting lower and upper eyelids occasionally. Get medical attention immediately.

---

## 5. Fire Fighting Measures

**Fire:**

Not considered to be a fire hazard. Powder/dust is flammable when heated or exposed to flame.

**Explosion:**

Not considered to be an explosion hazard.

**Fire Extinguishing Media:**

Use any means suitable for extinguishing surrounding fire. Do not allow water runoff to enter sewers or waterways.

**Special Information:**

In the event of a fire, wear full protective clothing and NIOSH-approved self-contained breathing apparatus with full facepiece operated in the pressure demand or other positive pressure mode. Can produce toxic lead fumes at elevated temperatures and also react with oxidizing materials.

---

## 6. Accidental Release Measures

Ventilate area of leak or spill. Wear appropriate personal protective equipment as specified in Section 8. Spills: Sweep up and containerize for reclamation or disposal. Vacuuming or wet sweeping may be used to avoid dust dispersal. US Regulations (CERCLA) require reporting spills and releases to soil, water and air in excess of reportable quantities. The toll free number for the US Coast Guard National Response Center is (800) 424-8802.

---

## 7. Handling and Storage

Keep in a tightly closed container, stored in a cool, dry, ventilated area. Protect against physical damage. Isolate from incompatible substances. Areas in which exposure to lead

metal or lead compounds may occur should be identified by signs or appropriate means, and access to the area should be limited to authorized persons. Containers of this material may be hazardous when empty since they retain product residues (dust, solids); observe all warnings and precautions listed for the product.

---

## 8. Exposure Controls/Personal Protection

### **Airborne Exposure Limits:**

For lead, metal and inorganic dusts and fumes, as Pb:

-OSHA Permissible Exposure Limit (PEL): 0.05 mg/m<sup>3</sup> (TWA)

For lead, elemental and inorganic compounds, as Pb:

-ACGIH Threshold Limit Value (TLV): 0.05 mg/m<sup>3</sup> (TWA), A3 animal carcinogen  
ACGIH Biological Exposure Indices (BEI): 30 ug/100ml, notation B (see actual Indices for more information).

For lead, inorganic:

-NIOSH Recommended Exposure Limit (REL): 0.1 mg/m<sup>3</sup> (TWA)

### **Ventilation System:**

A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits. Local exhaust ventilation is generally preferred because it can control the emissions of the contaminant at its source, preventing dispersion of it into the general work area. Please refer to the ACGIH document, *Industrial Ventilation, A Manual of Recommended Practices*, most recent edition, for details.

### **Personal Respirators (NIOSH Approved):**

If the exposure limit is exceeded and engineering controls are not feasible, a half-face high efficiency particulate respirator (NIOSH type N100 filter) may be worn for up to ten times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. A full-face piece high efficiency particulate respirator (NIOSH type N100 filter) may be worn up to 50 times the exposure limit, or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. If oil particles (e.g. lubricants, cutting fluids, glycerine, etc.) are present, use a NIOSH type R or P filter. For emergencies or instances where the exposure levels are not known, use a full-facepiece positive-pressure, air-supplied respirator. **WARNING:** Air-purifying respirators do not protect workers in oxygen-deficient atmospheres.

### **Skin Protection:**

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

### **Eye Protection:**

Use chemical safety goggles and/or full face shield where dusting or splashing of solutions is possible. Maintain eye wash fountain and quick-drench facilities in work area.

### **Other Control Measures:**

Eating, drinking, and smoking should not be permitted in areas where solids or liquids containing lead compounds are handled, processed, or stored. See OSHA substance-specific standard for more information on personal protective equipment, engineering and work practice controls, medical surveillance, record keeping, and reporting requirements. (29 CFR 1910.1025).

---

## 9. Physical and Chemical Properties

**Appearance:**

Small, white to blue-gray metallic shot or granules.

**Odor:**

Odorless.

**Solubility:**

Insoluble in water.

**Density:**

11.34

**pH:**

No information found.

**% Volatiles by volume @ 21C (70F):**

0

**Boiling Point:**

1740C (3164F)

**Melting Point:**

327.5C (622F)

**Vapor Density (Air=1):**

No information found.

**Vapor Pressure (mm Hg):**

1.77 @ 1000C (1832F)

**Evaporation Rate (BuAc=1):**

No information found.

---

## 10. Stability and Reactivity

**Stability:**

Stable under ordinary conditions of use and storage.

**Hazardous Decomposition Products:**

Does not decompose but toxic lead or lead oxide fumes may form at elevated temperatures.

**Hazardous Polymerization:**

Will not occur.

**Incompatibilities:**

Ammonium nitrate, chlorine trifluoride, hydrogen peroxide, sodium azide, zirconium, disodium acetylide, sodium acetylide and oxidants.

**Conditions to Avoid:**

Heat, flames, ignition sources and incompatibles.

---

## 11. Toxicological Information

**Toxicological Data:**

Investigated as a tumorigen, mutagen, reproductive effector.

**Reproductive Toxicity:**

Lead and other smelter emissions are human reproductive hazards. (Chemical Council on

Environmental Quality; Chemical Hazards to Human Reproduction, 1981).

**Carcinogenicity:**

EPA / IRIS classification: Group B2 - Probable human carcinogen, sufficient animal evidence.

-----\Cancer Lists\-----			
Ingredient	---NTP Carcinogen---		IARC Category
	Known	Anticipated	
Lead (7439-92-1)	No	No	2B

## 12. Ecological Information

**Environmental Fate:**

When released into the soil, this material is not expected to leach into groundwater. This material may bioaccumulate to some extent.

**Environmental Toxicity:**

No information found.

## 13. Disposal Considerations

Whatever cannot be saved for recovery or recycling should be managed in an appropriate and approved waste facility. Although not a listed RCRA hazardous waste, this material may exhibit one or more characteristics of a hazardous waste and require appropriate analysis to determine specific disposal requirements. Processing, use or contamination of this product may change the waste management options. State and local disposal regulations may differ from federal disposal regulations. Dispose of container and unused contents in accordance with federal, state and local requirements.

## 14. Transport Information

Not regulated.

## 15. Regulatory Information

-----\Chemical Inventory Status - Part 1\-----				
Ingredient	TSCA	EC	Japan	Australia
Lead (7439-92-1)	Yes	Yes	Yes	Yes

-----\Chemical Inventory Status - Part 2\-----				
	--Canada--			

Ingredient	Korea	DSL	NDSL	Phil.
Lead (7439-92-1)	Yes	Yes	No	Yes

-----\Federal, State & International Regulations - Part 1\-----				
Ingredient	-SARA 302-		-----SARA 313-----	
	RQ	TPQ	List	Chemical Catg.
Lead (7439-92-1)	No	No	Yes	No

-----\Federal, State & International Regulations - Part 2\-----			
Ingredient	CERCLA	-RCRA-	-TSCA-
		261.33	8(d)
Lead (7439-92-1)	10	No	No

Chemical Weapons Convention: No      TSCA 12(b): No      CDTA: No  
 SARA 311/312: Acute: Yes      Chronic: Yes      Fire: No      Pressure: No  
 Reactivity: No      (Pure / Solid)

**WARNING:**

THIS PRODUCT CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.

**Australian Hazchem Code:** None allocated.

**Poison Schedule:** S6

**WHMIS:**

This MSDS has been prepared according to the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

## 16. Other Information

**NFPA Ratings:** Health: **3** Flammability: **1** Reactivity: **0**

**Label Hazard Warning:**

POISON! DANGER! MAY BE FATAL IF SWALLOWED OR INHALED. CAUSES IRRITATION TO SKIN, EYES AND RESPIRATORY TRACT. NEUROTOXIN. AFFECTS THE GUM TISSUE, CENTRAL NERVOUS SYSTEM, KIDNEYS, BLOOD AND REPRODUCTIVE SYSTEM. POSSIBLE CANCER HAZARD. MAY CAUSE CANCER BASED ON ANIMAL DATA. Risk of cancer depends on duration and level of exposure.

**Label Precautions:**

Do not get in eyes, on skin, or on clothing.

Do not breathe dust.

Keep container closed.

Use only with adequate ventilation.

Wash thoroughly after handling.

**Label First Aid:**

If swallowed, induce vomiting immediately as directed by medical personnel. Never give anything by mouth to an unconscious person. If inhaled, remove to fresh air. If not

breathing, give artificial respiration. If breathing is difficult, give oxygen. In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Wash clothing before reuse. In all cases, get medical attention.

**Product Use:**

Laboratory Reagent.

**Revision Information:**

No Changes.

**Disclaimer:**

\*\*\*\*\*

**Mallinckrodt Baker, Inc. provides the information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. This document is intended only as a guide to the appropriate precautionary handling of the material by a properly trained person using this product. Individuals receiving the information must exercise their independent judgment in determining its appropriateness for a particular purpose. MALLINCKRODT BAKER, INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS. ACCORDINGLY, MALLINCKRODT BAKER, INC. WILL NOT BE RESPONSIBLE FOR DAMAGES RESULTING FROM USE OF OR RELIANCE UPON THIS INFORMATION.**

\*\*\*\*\*

**Prepared by:** Environmental Health & Safety  
Phone Number: (314) 654-1600 (U.S.A.)

MSDS Number: **M1599** \* \* \* \* \* *Effective Date: 12/19/05* \* \* \* \* \* *Supersedes: 08/10/04*

# **MSDS** Material Safety Data Sheet

From: Mallinckrodt Baker, Inc.  
222 Red School Lane  
Phillipsburg, NJ 08865



24 Hour Emergency Telephone: 908-859-2151  
CHEMTREC: 1-800-424-9300

National Response in Canada  
CANUTEC: 613-996-6666

Outside U.S. and Canada  
Chemtrec: 703-527-3887

NOTE: CHEMTREC, CANUTEC and National Response Center emergency numbers to be used only in the event of chemical emergencies involving a spill, leak, fire, exposure or accident involving chemicals.

All non-emergency questions should be directed to Customer Service (1-800-582-2537) for assistance.

# MERCURY

## 1. Product Identification

**Synonyms:** Quicksilver; hydrargyrum; Liquid Silver

**CAS No.:** 7439-97-6

**Molecular Weight:** 200.59

**Chemical Formula:** Hg

**Product Codes:**

J.T. Baker: 2564, 2567, 2569

Mallinckrodt: 1278, 1280, 1288

## 2. Composition/Information on Ingredients

Ingredient	CAS No	Percent	Hazardous
Mercury	7439-97-6	90 - 100%	Yes

## 3. Hazards Identification

**Emergency Overview**

**DANGER! CORROSIVE. CAUSES BURNS TO SKIN, EYES, AND RESPIRATORY TRACT. MAY BE FATAL IF SWALLOWED OR INHALED. HARMFUL IF ABSORBED THROUGH SKIN. AFFECTS THE KIDNEYS AND CENTRAL NERVOUS SYSTEM. MAY CAUSE ALLERGIC SKIN REACTION.**

**SAF-T-DATA<sup>(tm)</sup>** Ratings (Provided here for your convenience)

---

Health Rating: 4 - Extreme (Life)

Flammability Rating: 0 - None

Reactivity Rating: 1 - Slight

Contact Rating: 3 - Severe (Corrosive)

Lab Protective Equip: GOGGLES & SHIELD; LAB COAT & APRON; VENT HOOD; PROPER GLOVES

Storage Color Code: White (Corrosive)

---

### **Potential Health Effects**

---

#### **Inhalation:**

Mercury vapor is highly toxic via this route. Causes severe respiratory tract damage. Symptoms include sore throat, coughing, pain, tightness in chest, breathing difficulties, shortness of breath, headache, muscle weakness, anorexia, gastrointestinal disturbance, ringing in the ear, liver changes, fever, bronchitis and pneumonitis. Can be absorbed through inhalation with symptoms similar to ingestion.

#### **Ingestion:**

May cause burning of the mouth and pharynx, abdominal pain, vomiting, corrosive ulceration, bloody diarrhea. May be followed by a rapid and weak pulse, shallow breathing, paleness, exhaustion, tremors and collapse. Delayed death may occur from renal failure. Gastrointestinal uptake of mercury is less than 5% but its ability to penetrate tissues presents some hazard. Initial symptoms may be thirst, possible abdominal discomfort.

#### **Skin Contact:**

Causes irritation and burns to skin. Symptoms include redness and pain. May cause skin allergy and sensitization. Can be absorbed through the skin with symptoms to parallel ingestion.

#### **Eye Contact:**

Causes irritation and burns to eyes. Symptoms include redness, pain, blurred vision; may cause serious and permanent eye damage.

#### **Chronic Exposure:**

Chronic exposure through any route can produce central nervous system damage. May cause muscle tremors, personality and behavior changes, memory loss, metallic taste, loosening of the teeth, digestive disorders, skin rashes, brain damage and kidney damage. Can cause skin allergies and accumulate in the body. Repeated skin contact can cause the skin to turn gray in color. A suspected reproductive hazard; may damage the developing fetus and decrease fertility in males and females.

#### **Aggravation of Pre-existing Conditions:**

Persons with nervous disorders, or impaired kidney or respiratory function, or a history of allergies or a known sensitization to mercury may be more susceptible to the effects of the substance.

## 4. First Aid Measures

**Inhalation:**

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention immediately.

**Ingestion:**

Induce vomiting immediately as directed by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.

**Skin Contact:**

Immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention immediately. Wash clothing before reuse. Thoroughly clean shoes before reuse.

**Eye Contact:**

Immediately flush eyes with plenty of water for at least 15 minutes, lifting lower and upper eyelids occasionally. Get medical attention immediately.

---

## 5. Fire Fighting Measures

**Fire:**

Not considered to be a fire hazard.

**Explosion:**

Not considered to be an explosion hazard.

**Fire Extinguishing Media:**

Use any means suitable for extinguishing surrounding fire. Do not allow water runoff to enter sewers or waterways.

**Special Information:**

In the event of a fire, wear full protective clothing and NIOSH-approved self-contained breathing apparatus with full facepiece operated in the pressure demand or other positive pressure mode. Undergoes hazardous reactions in the presence of heat and sparks or ignition. Smoke may contain toxic mercury or mercuric oxide. Smoke may contain toxic mercury or mercuric oxide.

---

## 6. Accidental Release Measures

Ventilate area of leak or spill. Clean-up personnel require protective clothing and respiratory protection from vapor.

Spills: Pick up and place in a suitable container for reclamation or disposal in a method that does not generate misting. Sprinkle area with sulfur or calcium polysulfide to suppress mercury. Do not flush to sewer. US Regulations (CERCLA) require reporting spills and releases to soil, water and air in excess of reportable quantities. The toll free number for the US Coast Guard National Response Center is (800) 424-8802.

J. T. Baker CINNASORB® and RESISORB® are recommended for spills of this product.

---

## 7. Handling and Storage

Keep in a tightly closed container, stored in a cool, dry, ventilated area. Protect against physical damage. Isolate from any source of heat or ignition. Do not use or store on porous work surfaces (wood, unsealed concrete, etc.). Follow strict hygiene practices. Containers of this material may be hazardous when empty since they retain product residues (vapors, liquid); observe all warnings and precautions listed for the product.

---

## 8. Exposure Controls/Personal Protection

### **Airborne Exposure Limits:**

- OSHA Acceptable Ceiling Concentration:

mercury and mercury compounds: 0.1 mg/m<sup>3</sup> (TWA), skin

- ACGIH Threshold Limit Value (TLV):

inorganic and metallic mercury, as Hg: 0.025 mg/m<sup>3</sup> (TWA) skin, A4 Not classifiable as a human carcinogen.

- ACGIH Biological Exposure Indices:

total inorganic mercury in urine (preshift): 35 ug/g creatinine;

total inorganic mercury in blood (end of shift): 15 ug/l.

### **Ventilation System:**

A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits. Local exhaust ventilation is generally preferred because it can control the emissions of the contaminant at its source, preventing dispersion of it into the general work area. Please refer to the ACGIH document, *Industrial Ventilation, A Manual of Recommended Practices*, most recent edition, for details.

### **Personal Respirators (NIOSH Approved):**

If the exposure limit is exceeded and engineering controls are not feasible, a half-face respirator with a mercury vapor or chlorine gas cartridge may be worn for up to ten times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. A full-face piece respirator with a mercury vapor or chlorine gas cartridge may be worn up to 50 times the exposure limit, or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. For emergencies or instances where the exposure levels are not known, use a full-face piece positive-pressure, air-supplied respirator.

**WARNING:** Air-purifying respirators do not protect workers in oxygen-deficient atmospheres.

### **Skin Protection:**

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

### **Eye Protection:**

Use chemical safety goggles and/or a full face shield where splashing is possible. Maintain eye wash fountain and quick-drench facilities in work area.

---

## 9. Physical and Chemical Properties

**Appearance:**

Silver-white, heavy, mobile, liquid metal.

**Odor:**

Odorless.

**Solubility:**

Insoluble in water.

**Density:**

13.55

**pH:**

No information found.

**% Volatiles by volume @ 21C (70F):**

100

**Boiling Point:**

356.7C (675F)

**Melting Point:**

-38.87C (-38F)

**Vapor Density (Air=1):**

7.0

**Vapor Pressure (mm Hg):**

0.0018 @ 25C (77F)

**Evaporation Rate (BuAc=1):**

4

---

## 10. Stability and Reactivity

**Stability:**

Stable under ordinary conditions of use and storage.

**Hazardous Decomposition Products:**

At high temperatures, vaporizes to form extremely toxic fumes.

**Hazardous Polymerization:**

Will not occur.

**Incompatibilities:**

Acetylenes, ammonia, ethylene oxide, chlorine dioxide, azides, metal oxides, methyl silane, lithium, rubidium, oxygen, strong oxidants, metal carbonyls.

**Conditions to Avoid:**

Heat, flames, ignition sources, metal surfaces and incompatibles.

---

## 11. Toxicological Information

**Toxicological Data:**

Investigated as a tumorigen, mutagen, reproductive effector.

**Reproductive Toxicity:**

All forms of mercury can cross the placenta to the fetus, but most of what is known has

been learned from experimental animals. See Chronic Health Hazards.

**Carcinogenicity:**

EPA / IRIS classification: Group D1 - Not classifiable as a human carcinogen.

Ingredient	---NTP Carcinogen---		IARC Category
	Known	Anticipated	
Mercury (7439-97-6)	No	No	3

## 12. Ecological Information

**Environmental Fate:**

This material has an experimentally-determined bioconcentration factor (BCF) of greater than 100. This material is expected to significantly bioaccumulate.

**Environmental Toxicity:**

This material is expected to be toxic to aquatic life. The LC50/96-hour values for fish are less than 1 mg/l.

## 13. Disposal Considerations

Whatever cannot be saved for recovery or recycling should be handled as hazardous waste and sent to a RCRA approved waste facility. Processing, use or contamination of this product may change the waste management options. State and local disposal regulations may differ from federal disposal regulations. Dispose of container and unused contents in accordance with federal, state and local requirements.

## 14. Transport Information

**Domestic (Land, D.O.T.)**

-----  
**Proper Shipping Name:** RQ, MERCURY

**Hazard Class:** 8

**UN/NA:** UN2809

**Packing Group:** III

**Information reported for product/size:** 1LB

**International (Water, I.M.O.)**

-----  
**Proper Shipping Name:** MERCURY

**Hazard Class:** 8

**UN/NA:** UN2809

**Packing Group:** III

**Information reported for product/size:** 1LB

**International (Air, I.C.A.O.)**

-----  
**Proper Shipping Name:** MERCURY  
**Hazard Class:** 8  
**UN/NA:** UN2809  
**Packing Group:** III  
**Information reported for product/size:** 1LB

**15. Regulatory Information**

```
-----\Chemical Inventory Status - Part 1\-----
Ingredient                                     TSCA   EC     Japan  Australia
-----
Mercury (7439-97-6)                          Yes    Yes    No     Yes
```

```
-----\Chemical Inventory Status - Part 2\-----
Ingredient                                     Korea  DSL    NDSL   Phil.
-----
Mercury (7439-97-6)                          Yes    Yes    No     Yes
```

```
-----\Federal, State & International Regulations - Part 1\-----
Ingredient                                     -SARA 302-  -SARA 313-
RQ      TPQ      List  Chemical Catg.
-----
Mercury (7439-97-6)                          No     No     Yes    No
```

```
-----\Federal, State & International Regulations - Part 2\-----
Ingredient                                     -RCRA-    -TSCA-
CERCLA  261.33    8(d)
-----
Mercury (7439-97-6)                          1        U151    No
```

Chemical Weapons Convention: No      TSCA 12(b): No      CDTA: No  
SARA 311/312: Acute: Yes      Chronic: Yes      Fire: No      Pressure: No  
Reactivity: No      (Pure / Liquid)

**WARNING:**

THIS PRODUCT CONTAINS A CHEMICAL(S) KNOWN TO THE STATE OF CALIFORNIA TO CAUSE BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.

**Australian Hazchem Code:** 2Z

**Poison Schedule:** S7

**WHMIS:**

This MSDS has been prepared according to the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

**16. Other Information**

**NFPA Ratings:** Health: **3** Flammability: **0** Reactivity: **0**

**Label Hazard Warning:**

DANGER! CORROSIVE. CAUSES BURNS TO SKIN, EYES, AND RESPIRATORY TRACT. MAY BE FATAL IF SWALLOWED OR INHALED. HARMFUL IF ABSORBED THROUGH SKIN. AFFECTS THE KIDNEYS AND CENTRAL NERVOUS SYSTEM. MAY CAUSE ALLERGIC SKIN REACTION.

**Label Precautions:**

Do not get in eyes, on skin, or on clothing.

Do not breathe vapor.

Keep container closed.

Use only with adequate ventilation.

Wash thoroughly after handling.

**Label First Aid:**

If swallowed, induce vomiting immediately as directed by medical personnel. Never give anything by mouth to an unconscious person. If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse. In all cases get medical attention immediately.

**Product Use:**

Laboratory Reagent.

**Revision Information:**

MSDS Section(s) changed since last revision of document include: 3.

**Disclaimer:**

\*\*\*\*\*

**Mallinckrodt Baker, Inc. provides the information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. This document is intended only as a guide to the appropriate precautionary handling of the material by a properly trained person using this product. Individuals receiving the information must exercise their independent judgment in determining its appropriateness for a particular purpose. MALLINCKRODT BAKER, INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS. ACCORDINGLY, MALLINCKRODT BAKER, INC. WILL NOT BE RESPONSIBLE FOR DAMAGES RESULTING FROM USE OF OR RELIANCE UPON THIS INFORMATION.**

\*\*\*\*\*

**Prepared by:** Environmental Health & Safety

Phone Number: (314) 654-1600 (U.S.A.)

# Material Safety Data Sheet

## Phenanthrene, 90%

ACC# 59921

### Section 1 - Chemical Product and Company Identification

**MSDS Name:** Phenanthrene, 90%**Catalog Numbers:** AC130100000, AC130100010, AC130102500**Synonyms:****Company Identification:**

Acros Organics N.V.

One Reagent Lane

Fair Lawn, NJ 07410

**For information in North America, call:** 800-ACROS-01**For emergencies in the US, call CHEMTREC:** 800-424-9300

### Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
85-01-8	Phenanthrene	90.0	201-581-5

### Section 3 - Hazards Identification

#### EMERGENCY OVERVIEW

Appearance: brown solid.

**Caution!** Powdered material may form explosive dust-air mixtures. May cause allergic skin reaction. May cause eye and skin irritation. May cause respiratory tract irritation. Cancer suspect agent.

**Target Organs:** None.

#### Potential Health Effects

**Eye:** May cause eye irritation.**Skin:** May cause skin irritation. May cause photosensitive skin reactions in certain individuals.**Ingestion:** May cause irritation of the digestive tract.**Inhalation:** Inhalation of dust may cause respiratory tract irritation.**Chronic:** No information found.

### Section 4 - First Aid Measures

**Eyes:** Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid immediately.

**Skin:** Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.

**Ingestion:** If victim is conscious and alert, give 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid immediately.

**Inhalation:** Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

**Notes to Physician:** Treat symptomatically.

## Section 5 - Fire Fighting Measures

**General Information:** As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Dusts at sufficient concentrations can form explosive mixtures with air. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion.

**Extinguishing Media:** Use water spray or dry chemical.

**Flash Point:** Not available.

**Autoignition Temperature:** Not available.

**Explosion Limits, Lower:** Not available.

**Upper:** Not available.

**NFPA Rating:** (estimated) Health: 1; Flammability: 1; Instability: 0

## Section 6 - Accidental Release Measures

**General Information:** Use proper personal protective equipment as indicated in Section 8.

**Spills/Leaks:** Clean up spills immediately, observing precautions in the Protective Equipment section. Sweep up, then place into a suitable container for disposal. Avoid generating dusty conditions. Provide ventilation. Do not let this chemical enter the environment.

## Section 7 - Handling and Storage

**Handling:** Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Minimize dust generation and accumulation. Avoid contact with eyes, skin, and clothing. Keep container tightly closed. Avoid ingestion and inhalation.

**Storage:** Keep container closed when not in use. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances.

## Section 8 - Exposure Controls, Personal Protection

**Engineering Controls:** Use adequate ventilation to keep airborne concentrations low.

### Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
Phenanthrene	0.2 mg/m <sup>3</sup> TWA (as benzene soluble aerosol) (listed under Coal tar pitches).	0.1 mg/m <sup>3</sup> TWA (cyclohexane-extractable fraction) (listed under Coal tar pitches). 80 mg/m <sup>3</sup> IDLH (listed under Coal tar pitches).	0.2 mg/m <sup>3</sup> TWA (as benzene soluble fraction) (listed under Coal tar pitches).

**OSHA Vacated PELs:** Phenanthrene: No OSHA Vacated PELs are listed for this chemical.

**Personal Protective Equipment**

**Eyes:** Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

**Skin:** Wear appropriate protective gloves to prevent skin exposure.

**Clothing:** Wear appropriate protective clothing to prevent skin exposure.

**Respirators:** Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

## Section 9 - Physical and Chemical Properties

**Physical State:** Solid

**Appearance:** brown

**Odor:** none reported

**pH:** Not available.

**Vapor Pressure:** 1 mm Hg @116c

**Vapor Density:** Not available.

**Evaporation Rate:**Not available.

**Viscosity:** Not available.

**Boiling Point:** 340 deg C

**Freezing/Melting Point:**101 deg C

**Decomposition Temperature:**Not available.

**Solubility:** insoluble

**Specific Gravity/Density:**1.0630g/cm<sup>3</sup>

**Molecular Formula:**C<sub>14</sub>H<sub>10</sub>

**Molecular Weight:**178.23

## Section 10 - Stability and Reactivity

**Chemical Stability:** Stable under normal temperatures and pressures.

**Conditions to Avoid:** Incompatible materials, dust generation, strong oxidants.

**Incompatibilities with Other Materials:** Strong oxidizing agents.

**Hazardous Decomposition Products:** Carbon monoxide, carbon dioxide.

**Hazardous Polymerization:** Has not been reported.

## Section 11 - Toxicological Information

**RTECS#:**

**CAS#** 85-01-8: SF7175000

**LD50/LC50:**

CAS# 85-01-8:

Oral, mouse: LD50 = 700 mg/kg;

Oral, rat: LD50 = 1.8 gm/kg;

**Carcinogenicity:**

CAS# 85-01-8:

- **ACGIH:** A1 - Confirmed Human Carcinogen (as benzene soluble aerosol) (listed as 'Coal tar pitches').
- **California:** Not listed.
- **NTP:** Known carcinogen (listed as Coal tar pitches).
- **IARC:** Group 1 carcinogen (listed as Coal tar pitches).

**Epidemiology:** No data available.

**Teratogenicity:** No data available.

**Reproductive Effects:** No data available.

**Mutagenicity:** No data available.

**Neurotoxicity:** No data available.

**Other Studies:**

## Section 12 - Ecological Information

No information available.

## Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

**RCRA P-Series:** None listed.

**RCRA U-Series:** None listed.

## Section 14 - Transport Information

	US DOT	Canada TDG
<b>Shipping Name:</b>	Not regulated as a hazardous material	No information available.
<b>Hazard Class:</b>		
<b>UN Number:</b>		
<b>Packing Group:</b>		

## Section 15 - Regulatory Information

### US FEDERAL

#### TSCA

CAS# 85-01-8 is listed on the TSCA inventory.

#### Health & Safety Reporting List

None of the chemicals are on the Health & Safety Reporting List.

#### Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

#### Section 12b

None of the chemicals are listed under TSCA Section 12b.

**TSCA Significant New Use Rule**

None of the chemicals in this material have a SNUR under TSCA.

**CERCLA Hazardous Substances and corresponding RQs**

CAS# 85-01-8: 5000 lb final RQ; 2270 kg final RQ

**SARA Section 302 Extremely Hazardous Substances**

None of the chemicals in this product have a TPQ.

**SARA Codes**

CAS # 85-01-8: immediate.

**Section 313**

This material contains Phenanthrene (CAS# 85-01-8, 90.0%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

**Clean Air Act:**

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

**Clean Water Act:**

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

CAS# 85-01-8 is listed as a Priority Pollutant under the Clean Water Act.

None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

**OSHA:**

None of the chemicals in this product are considered highly hazardous by OSHA.

**STATE**

CAS# 85-01-8 can be found on the following state right to know lists: California, New Jersey, Pennsylvania, Minnesota, (listed as Coal tar pitches), Massachusetts.

**California Prop 65**

California No Significant Risk Level: None of the chemicals in this product are listed.

**European/International Regulations****European Labeling in Accordance with EC Directives****Hazard Symbols:**

T

**Risk Phrases:**

R 45 May cause cancer.

**Safety Phrases:**

S 24/25 Avoid contact with skin and eyes.

**WGK (Water Danger/Protection)**

CAS# 85-01-8: No information available.

**Canada - DSL/NDSL**

CAS# 85-01-8 is listed on Canada's DSL List.

**Canada - WHMIS**

This product has a WHMIS classification of D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

**Canadian Ingredient Disclosure List**


CAS# 85-01-8 is listed on the Canadian Ingredient Disclosure List.

**Section 16 - Additional Information**

**MSDS Creation Date:** 7/14/1998

**Revision #3 Date:** 10/03/2005

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.*



Health	3
Fire	1
Reactivity	2
Personal Protection	E

## Material Safety Data Sheet Arsenic MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Arsenic

**Catalog Codes:** SLA1006

**CAS#:** 7440-38-2

**RTECS:** CG0525000

**TSCA:** TSCA 8(b) inventory: Arsenic

**CI#:** Not applicable.

**Synonym:**

**Chemical Name:** Arsenic

**Chemical Formula:** As

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Arsenic	7440-38-2	100

**Toxicological Data on Ingredients:** Arsenic: ORAL (LD50): Acute: 763 mg/kg [Rat]. 145 mg/kg [Mouse].

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Very hazardous in case of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant), of eye contact (irritant).

**Potential Chronic Health Effects:**

**CARCINOGENIC EFFECTS:** Classified A1 (Confirmed for human.) by ACGIH.

**MUTAGENIC EFFECTS:** Not available.

**TERATOGENIC EFFECTS:** Not available.

**DEVELOPMENTAL TOXICITY:** Not available.

The substance is toxic to kidneys, lungs, the nervous system, mucous membranes.

Repeated or prolonged exposure to the substance can produce target organs damage.

### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** May be combustible at high temperature.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:** Flammable in presence of open flames and sparks, of heat, of oxidizing materials.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:**

Material in powder form, capable of creating a dust explosion. When heated to decomposition it emits highly toxic fumes.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Use appropriate tools to put the spilled solid in a convenient waste disposal container.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Be careful that the product is not

present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

### Precautions:

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents, acids, moisture.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 0.01 from ACGIH (TLV) [United States] [1995]  
Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Lustrous solid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 74.92 g/mole

**Color:** Silvery.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** Not available.

**Melting Point:** Sublimation temperature: 615°C (1139°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 5.72 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Reactive with oxidizing agents, acids, moisture.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

### Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:** Acute oral toxicity (LD50): 145 mg/kg [Mouse].

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified A1 (Confirmed for human.) by ACGIH.

Causes damage to the following organs: kidneys, lungs, the nervous system, mucous membranes.

**Other Toxic Effects on Humans:**

Very hazardous in case of ingestion, of inhalation.

Slightly hazardous in case of skin contact (irritant).

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:** Not available.

### Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

### Section 14: Transport Information

**DOT Classification:** CLASS 6.1: Poisonous material.

**Identification:** : Arsenic UNNA: UN1558 PG: II

**Special Provisions for Transport:** Not available.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Arsenic

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Arsenic

Pennsylvania RTK: Arsenic

Massachusetts RTK: Arsenic

TSCA 8(b) inventory: Arsenic

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):**

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC).

CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):**

R22- Harmful if swallowed.

R45- May cause cancer.

**HMIS (U.S.A.):**

**Health Hazard:** 3

**Fire Hazard:** 1

**Reactivity:** 2

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 3

**Flammability:** 1

**Reactivity:** 2

**Specific hazard:**

**Protective Equipment:**

Gloves.  
Lab coat.  
Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.  
Safety glasses.

**Section 16: Other Information****References:**


-Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987.  
-Liste des produits purs tératogènes, mutagènes, cancérogènes. Répertoire toxicologique de la Commission de la Santé et de la Sécurité du Travail du Québec.  
-Material safety data sheet emitted by: la Commission de la Santé et de la Sécurité du Travail du Québec.  
-SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984.  
-The Sigma-Aldrich Library of Chemical Safety Data, Edition II.  
-Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 04:16 PM

**Last Updated:** 10/09/2005 04:16 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	0
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet Nickel metal MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Nickel metal

**Catalog Codes:** SLN2296, SLN1342, SLN1954

**CAS#:** 7440-02-0

**RTECS:** QR5950000

**TSCA:** TSCA 8(b) inventory: Nickel metal

**CI#:** Not applicable.

**Synonym:** Nickel Metal shot; Nickel metal foil.

**Chemical Name:** Nickel

**Chemical Formula:** Ni

**Contact Information:**

**Sciencelab.com, Inc.**  
14025 Smith Rd.  
Houston, Texas 77396

US Sales: **1-800-901-7247**  
International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Nickel metal	7440-02-0	100

**Toxicological Data on Ingredients:** Nickel metal LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of eye contact (irritant), of ingestion.

**Potential Chronic Health Effects:**

Slightly hazardous in case of skin contact (sensitizer), of ingestion, of inhalation (lung sensitizer).

**CARCINOGENIC EFFECTS:** Classified 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP.

**MUTAGENIC EFFECTS:** Not available.

**TERATOGENIC EFFECTS:** Not available.

**DEVELOPMENTAL TOXICITY:** Not available.

The substance is toxic to skin.

The substance may be toxic to kidneys, lungs, liver, upper respiratory tract.

Repeated or prolonged exposure to the substance can produce target organs damage.

## Section 4: First Aid Measures

### Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

### Skin Contact:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:** Not available.

### Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

### Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Non-flammable.

**Auto-Ignition Temperature:** Not applicable.

**Flash Points:** Not applicable.

**Flammable Limits:** Not applicable.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:** Not applicable.

### Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

### Fire Fighting Media and Instructions:

Flammable solid.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:** Material in powder form, capable of creating a dust explosion. This material is flammable in powder form only.

### Special Remarks on Explosion Hazards:

Material in powder form, capable of creating a dust explosion.

Mixtures containing Potassium Perchlorate with Nickel & Titanium powders & infusorial earth can explode.

Adding 2 or 3 drops of approximately 90% peroxyformic acid to powdered nickel will result in explosion.

Powdered nickel reacts explosively upon contact with fused ammonium nitrate at temperatures below 200 deg. C.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up.. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible. Keep away from incompatibles such as oxidizing agents, combustible materials, metals, acids.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 1 (mg/m<sup>3</sup>) from ACGIH (TLV) [United States] Inhalation Respirable.

TWA: 0.5 (mg/m<sup>3</sup>) [United Kingdom (UK)]

TWA: 1 (mg/m<sup>3</sup>) from OSHA (PEL) [United States] Inhalation Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Metal solid. Lustrous solid.)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 58.71 g/mole

**Color:** Silvery.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2730°C (4946°F)

**Melting Point:** 1455°C (2651°F)

**Critical Temperature:** Not available.

**Specific Gravity:** Density: 8.908 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Insoluble in cold water, hot water.

Insoluble in Ammonia.

Soluble in dilute Nitric Acid.

Slightly soluble in Hydrochloric Acid, Sulfuric Acid.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, combustible materials, metals, acids.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Incompatible with strong acids, selenium, sulfur, wood and other combustibles, nickel nitrate, aluminum, aluminum trichloride, ethylene, p-dioxan, hydrogen, methanol, non-metals, oxidants, sulfur compounds, aniline, hydrogen sulfide, flammable solvents, hydrazine, and metal powders (especially zinc, aluminum, and magnesium), ammonium nitrate, nitryl fluoride, bromine pentafluoride, potassium perchlorate + titanium powder + industrial earth.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available.

LC50: Not available.

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP.

Causes damage to the following organs: skin.

May cause damage to the following organs: kidneys, lungs, liver, upper respiratory tract.

**Other Toxic Effects on Humans:**

Hazardous in case of inhalation.  
Slightly hazardous in case of skin contact (irritant, sensitizer), of ingestion.

**Special Remarks on Toxicity to Animals:**

Lowest Published Lethal Dose/Conc:  
LDL [Rat] - Route: Oral; Dose: 5000 mg/kg  
LDL [Guinea Pig] - Route: Oral; Dose: 5000 mg/kg

**Special Remarks on Chronic Effects on Humans:** May cause cancer based on animal test data

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects:  
Skin: Nickel dust and fume can irritate skin.  
Eyes: Nickel dust and fume can irritate eyes.  
Inhalation: Inhalation of dust or fume may cause respiratory tract irritation with non-productive cough, hoarseness, sore throat, headache, vertigo, weakness, chest pain, followed by delayed effects, including tachypnea, dyspnea, and ARDS. Death due to ARDS has been reported following inhalation of high concentrations of respirable metallic nickel dust. Later effects may include pulmonary edema and fibrosis.  
Ingestion: Metallic nickel is generally considered not to be acutely toxic if ingested. Ingestion may cause nausea, vomiting, abdominal , and diarrhea. Nickel may damage the kidneys(proteinuria), and may affect liver function. It may also affect behavior (somnia), and cardiovascular system (increased coronary artery resistance, decreased myocardial contractility, myocardial damage, regional or general arteriolar or venus dilation).  
Chronic Potential Health Effects:  
Skin: May cause skin allergy. Nickel and nickel compounds are among the most common sensitizers inducing allergic contact dermatitis.  
Inhalation: Chronic inhalation nickel dust or fume can cause chronic hypertrophic rhinitis, sinusitis, nasal polyps, perforation of the nasal septum, chronic pulmonary irritation, fibrosis, pulmonary edema, pulmonary eosinophilia, Pneumoconiosis, allergies (asthma-like allergy), and cancer of the nasal sinus cavities, lungs, and possibly other organs. Future exposures can cause asthma attacks with shortness of breath, wheezing, cough, and/or chest tightness. Chronic inhalation of nickel dust or fume may also affect the liver (impaired liver function tests), and blood (changes in red blood cell count).  
Ingestion: Prolonged or repeated ingestion of nickel can be a source chronic urticaria and other signs of allergy. Chronic ingestion of Nickel may also affect respiration and cause pneumoconiosis or fibrosis.  
Note: In the general population, sensitization occurs from exposure to nickel-containing coins, jewelry, watches,

**Section 12: Ecological Information**

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

**Section 13: Disposal Considerations**

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

**Section 14: Transport Information**

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

## Section 15: Other Regulatory Information

### Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Nickel metal

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Nickel metal

Connecticut hazardous material survey.: Nickel metal

Illinois toxic substances disclosure to employee act: Nickel metal

Illinois chemical safety act: Nickel metal

New York release reporting list: Nickel metal

Rhode Island RTK hazardous substances: Nickel metal

Pennsylvania RTK: Nickel metal

Michigan critical material: Nickel metal

Massachusetts RTK: Nickel metal

Massachusetts spill list: Nickel metal

New Jersey: Nickel metal

New Jersey spill list: Nickel metal

Louisiana spill reporting: Nickel metal

California Director's List of Hazardous Substances: Nickel metal

TSCA 8(b) inventory: Nickel metal

### Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

### Other Classifications:

**WHMIS (Canada):** CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

### DSCL (EEC):

R40- Possible risks of irreversible effects.

R43- May cause sensitization by skin contact.

S22- Do not breathe dust.

S36- Wear suitable protective clothing.

### HMIS (U.S.A.):

**Health Hazard:** 2

**Fire Hazard:** 0

**Reactivity:** 0

**Personal Protection:** E

### National Fire Protection Association (U.S.A.):

**Health:** 2

**Flammability:** 0

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.

Lab coat.

Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.

Safety glasses.

**Section 16: Other Information**


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:42 PM

**Last Updated:** 10/10/2005 08:42 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	3
Fire	3
Reactivity	2
Personal Protection	J

## Material Safety Data Sheet Calcium MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Calcium

**Catalog Codes:** SLC2782

**CAS#:** 7440-70-2

**RTECS:** EV8040000

**TSCA:** TSCA 8(b) inventory: Calcium

**CI#:** Not available.

**Synonym:**

**Chemical Formula:** Ca

**Contact Information:**

**Sciencelab.com, Inc.**  
14025 Smith Rd.  
Houston, Texas 77396

US Sales: **1-800-901-7247**  
International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Calcium	7440-70-2	100

**Toxicological Data on Ingredients:** Calcium LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Corrosive to eyes and skin. The amount of tissue damage depends on length of contact. Eye contact can result in corneal damage or blindness. Skin contact can produce inflammation and blistering. Inhalation of dust will produce irritation to gastro-intestinal or respiratory tract, characterized by burning, sneezing and coughing. Severe over-exposure can produce lung damage, choking, unconsciousness or death.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

The substance is toxic to lungs, mucous membranes.

Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure of the eyes to a low level of dust can produce eye irritation. Repeated skin exposure can produce local skin destruction, or dermatitis. Repeated inhalation of dust can produce varying degree of respiratory irritation or lung damage.

## Section 4: First Aid Measures

**Eye Contact:** Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

If the chemical got onto the clothed portion of the body, remove the contaminated clothes as quickly as possible, protecting your own hands and body. Place the victim under a deluge shower. If the chemical got on the victim's exposed skin, such as the hands : Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:** Not available.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable solid.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog.

**Special Remarks on Fire Hazards:** Not available.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Use appropriate tools to put the spilled solid in a convenient waste disposal container.

**Large Spill:**

Corrosive solid. Flammable solid that, in contact with water, emits flammable gases. Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Cover with dry earth, sand or other non-combustible material. Use water spray to reduce vapors. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal.

**Section 7: Handling and Storage****Precautions:**

Keep under inert atmosphere. Keep container dry. Do not breathe dust. Never add water to this product. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible. Avoid contact with skin and eyes. Keep away from incompatibles such as acids, moisture.

**Storage:**

Flammable materials should be stored in a separate safety storage cabinet or room. Keep away from heat. Keep away from sources of ignition. Keep container tightly closed. Keep in a cool, well-ventilated place. Ground all equipment containing material. Keep container dry. Keep in a cool place.

**Section 8: Exposure Controls/Personal Protection****Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:**

Splash goggles. Lab coat. Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor and dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

**Section 9: Physical and Chemical Properties**

**Physical state and appearance:** Solid.

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 40.08 g/mole

**Color:** Not available.

**pH (1% soln/water):** Not available.

**Boiling Point:** 1484°C (2703.2°F)

**Melting Point:** 839°C (1542.2°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 1.54 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Not available.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:**

Highly reactive with acids.

Reactive with moisture.

The product reacts violently with water to emit flammable but non toxic gases.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

### Section 11: Toxicological Information

**Routes of Entry:** Eye contact. Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available.

LC50: Not available.

**Chronic Effects on Humans:** The substance is toxic to lungs, mucous membranes.

**Other Toxic Effects on Humans:** Hazardous in case of skin contact (irritant), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:** Not available.

### Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are less toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

### Section 14: Transport Information

**DOT Classification:** CLASS 4.3: Material that emits flammable gases on contact with water.

**Identification:** : Calcium : UN1401 PG: II

**Special Provisions for Transport:** Not available.

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

Pennsylvania RTK: Calcium  
Massachusetts RTK: Calcium  
TSCA 8(b) inventory: Calcium

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-6: Reactive and very flammable material.  
CLASS E: Corrosive solid.

**DSCL (EEC):** R36/38- Irritating to eyes and skin.

**HMIS (U.S.A.):**

**Health Hazard:** 3

**Fire Hazard:** 3

**Reactivity:** 2

**Personal Protection:** j

**National Fire Protection Association (U.S.A.):**

**Health:** 3

**Flammability:** 3

**Reactivity:** 2

**Specific hazard:**

**Protective Equipment:**

Gloves.

Lab coat.

Vapor and dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.

Splash goggles.

**Section 16: Other Information**


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/11/2005 11:30 AM

**Last Updated:** 11/06/2008 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	3
Fire	1
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet Cadmium MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Cadmium

**Catalog Codes:** SLC3484, SLC5272, SLC2482

**CAS#:** 7440-43-9

**RTECS:** EU9800000

**TSCA:** TSCA 8(b) inventory: Cadmium

**CI#:** Not applicable.

**Synonym:**

**Chemical Name:** Cadmium

**Chemical Formula:** Cd

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Cadmium	7440-43-9	100

**Toxicological Data on Ingredients:** Cadmium: ORAL (LD50): Acute: 2330 mg/kg [Rat.]. 890 mg/kg [Mouse]. DUST (LC50): Acute: 50 ppm 4 hour(s) [Rat].

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of eye contact (irritant). Severe over-exposure can result in death.

**Potential Chronic Health Effects:**

**CARCINOGENIC EFFECTS:** Classified A2 (Suspected for human.) by ACGIH, 2 (Reasonably anticipated.) by NTP.

**MUTAGENIC EFFECTS:** Not available.

**TERATOGENIC EFFECTS:** Not available.

**DEVELOPMENTAL TOXICITY:** Not available.

The substance is toxic to kidneys, lungs, liver.

Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to an highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

## Section 4: First Aid Measures

**Eye Contact:** No known effect on eye contact, rinse with water for a few minutes.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:** Not available.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. **WARNING:** It may be hazardous to the person providing aid to give mouth-to-mouth resuscitation when the inhaled material is toxic, infectious or corrosive. Seek immediate medical attention.

**Ingestion:**

Do not induce vomiting. Examine the lips and mouth to ascertain whether the tissues are damaged, a possible indication that the toxic material was ingested; the absence of such signs, however, is not conclusive. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** May be combustible at high temperature.

**Auto-Ignition Temperature:** 570°C (1058°F)

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:**

Non-flammable in presence of open flames and sparks, of heat, of oxidizing materials, of reducing materials, of combustible materials, of moisture.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:**

Material in powder form, capable of creating a dust explosion. When heated to decomposition it emits toxic fumes.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Use appropriate tools to put the spilled solid in a convenient waste disposal container.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe dust. Wear suitable protective clothing In case of insufficient ventilation, wear suitable respiratory equipment If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents.

**Storage:**

Keep container dry. Keep in a cool place. Ground all equipment containing material. Keep container tightly closed. Keep in a cool, well-ventilated place. Highly toxic or infectious materials should be stored in a separate locked safety storage cabinet or room.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 0.01 (ppm)

Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Lustrous solid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 112.4 g/mole

**Color:** Silvery.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 765°C (1409°F)

**Melting Point:** 320.9°C (609.6°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 8.64 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water, methanol, diethyl ether, n-octanol.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Reactive with oxidizing agents.

**Corrosivity:** Not considered to be corrosive for metals and glass.

**Special Remarks on Reactivity:** Reacts violently with potassium.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

### Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE.

Acute oral toxicity (LD50): 890 mg/kg [Mouse].

Acute toxicity of the dust (LC50): 229.9 mg/m<sup>3</sup> 4 hour(s) [Rat].

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified A2 (Suspected for human.) by ACGIH, 2 (Reasonably anticipated.) by NTP.

The substance is toxic to kidneys, lungs, liver.

**Other Toxic Effects on Humans:**

Hazardous in case of ingestion, of inhalation.

Slightly hazardous in case of skin contact (irritant, sensitizer).

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** An allergen. 0047 Animal: embryotoxic, passes through the placental barrier.

**Special Remarks on other Toxic Effects on Humans:** May cause allergic reactions, exzema and/or dehydration of the skin.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

## Section 14: Transport Information

**DOT Classification:**

**Identification:**

**Special Provisions for Transport:**

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute:

Cadmium

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Cadmium

Pennsylvania RTK: Cadmium

Massachusetts RTK: Cadmium

TSCA 8(b) inventory: Cadmium

SARA 313 toxic chemical notification and release reporting: Cadmium

CERCLA: Hazardous substances.: Cadmium

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):**

CLASS D-1A: Material causing immediate and serious toxic effects (VERY TOXIC).

CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):**

R26- Very toxic by inhalation.

R45- May cause cancer.

**HMIS (U.S.A.):**

**Health Hazard:** 3

**Fire Hazard:** 1

**Reactivity:** 0

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 3

**Flammability:** 1

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.

Lab coat.

Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.

Safety glasses.

## Section 16: Other Information

### References:


- Hawley, G.G.. The Condensed Chemical Dictionary, 11e ed., New York N.Y., Van Nostrand Reinold, 1987.
- Liste des produits purs tératogènes, mutagènes, cancérogènes. Répertoire toxicologique de la Commission de la Santé et de la Sécurité du Travail du Québec.
- Material safety data sheet emitted by: la Commission de la Santé et de la Sécurité du Travail du Québec.
- SAX, N.I. Dangerous Properties of Industrial Materials. Toronto, Van Nostrand Reinold, 6e ed. 1984.
- The Sigma-Aldrich Library of Chemical Safety Data, Edition II.
- Guide de la loi et du règlement sur le transport des marchandises dangereuses au Canada. Centre de conformité international Ltée. 1986.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 04:29 PM

**Last Updated:** 11/06/2008 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	1
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet Copper MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Copper

**Catalog Codes:** SLC4939, SLC2152, SLC3943, SLC1150, SLC2941, SLC4729, SLC1936, SLC3727, SLC5515

**CAS#:** 7440-50-8

**RTECS:** GL5325000

**TSCA:** TSCA 8(b) inventory: Copper

**CI#:** Not available.

**Synonym:**

**Chemical Name:** Not available.

**Chemical Formula:** Cu

**Contact Information:**

**Sciencelab.com, Inc.**  
14025 Smith Rd.  
Houston, Texas 77396

US Sales: **1-800-901-7247**  
International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Copper	7440-50-8	100

**Toxicological Data on Ingredients:** Copper LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Very hazardous in case of ingestion. Hazardous in case of eye contact (irritant), of inhalation. Slightly hazardous in case of skin contact (irritant).

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

The substance is toxic to lungs, mucous membranes.

Repeated or prolonged exposure to the substance can produce target organs damage.

### Section 4: First Aid Measures

**Eye Contact:** Check for and remove any contact lenses. Do not use an eye ointment. Seek medical attention.

**Skin Contact:**

After contact with skin, wash immediately with plenty of water. Gently and thoroughly wash the contaminated skin with running water and non-abrasive soap. Be particularly careful to clean folds, crevices, creases and groin. Cover the irritated skin with an emollient. If irritation persists, seek medical attention. Wash contaminated clothing before reusing.

**Serious Skin Contact:** Not available.

**Inhalation:** Allow the victim to rest in a well ventilated area. Seek immediate medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do not induce vomiting. Loosen tight clothing such as a collar, tie, belt or waistband. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek immediate medical attention.

**Serious Ingestion:** Not available.

### Section 5: Fire and Explosion Data

**Flammability of the Product:** May be combustible at high temperature.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:** Not available.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray, fog or foam. Do not use water jet.

**Special Remarks on Fire Hazards:** Not available.

**Special Remarks on Explosion Hazards:** Not available.

### Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

### Precautions:

Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk, evaporate the residue under a fume hood. Ground all equipment containing material. Do not breathe dust. Avoid contact with eyes. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible.

### Storage:

Keep container dry. Keep in a cool place. Ground all equipment containing material. Keep container tightly closed. Keep in a cool, well-ventilated place. Combustible materials should be stored away from extreme heat and away from strong oxidizing agents.

## Section 8: Exposure Controls/Personal Protection

### Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

### Personal Protection:

Splash goggles. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

### Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self-contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

### Exposure Limits:

TWA: 1 (mg/m<sup>3</sup>) from ACGIH [1990]  
Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid.

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 63.54 g/mole

**Color:** Not available.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2595°C (4703°F)

**Melting Point:** 1083°C (1981.4°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 8.94 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Not available.

**Incompatibility with various substances:** Not available.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:** Not available.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** No.

### Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Eye contact. Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available.

LC50: Not available.

**Chronic Effects on Humans:** The substance is toxic to lungs, mucous membranes.

**Other Toxic Effects on Humans:**

Very hazardous in case of ingestion.

Hazardous in case of inhalation.

Slightly hazardous in case of skin contact (irritant).

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Human: passes through the placenta, excreted in maternal milk.

**Special Remarks on other Toxic Effects on Humans:** Not available.

### Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

### Section 13: Disposal Considerations

**Waste Disposal:**

### Section 14: Transport Information

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Marine Pollutant

### Section 15: Other Regulatory Information

**Federal and State Regulations:**

Pennsylvania RTK: Copper

Massachusetts RTK: Copper

TSCA 8(b) inventory: Copper

CERCLA: Hazardous substances.: Copper

**Other Regulations:** OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

**Other Classifications:**

**WHMIS (Canada):** CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

**DSCL (EEC):** R36- Irritating to eyes.

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 1

**Reactivity:** 0

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 2

**Flammability:** 1

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.

Lab coat.

Dust respirator. Be sure to use an

approved/certified respirator or

equivalent. Wear appropriate respirator

when ventilation is inadequate.  
Splash goggles.

## Section 16: Other Information


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 04:58 PM

**Last Updated:** 11/06/2008 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	1
Fire	3
Reactivity	2
Personal Protection	E

## Material Safety Data Sheet Magnesium MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Magnesium

**Catalog Codes:** SLM4408, SLM2263, SLM3637

**CAS#:** 7439-95-4

**RTECS:** OM2100000

**TSCA:** TSCA 8(b) inventory: Magnesium

**CI#:** Not applicable.

**Synonym:** Magnesium ribbons, turnings or sticks

**Chemical Name:** Magnesium

**Chemical Formula:** Mg

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.  
Houston, Texas 77396

US Sales: **1-800-901-7247**  
International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Magnesium	7439-95-4	100

**Toxicological Data on Ingredients:** Magnesium LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:** Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

Repeated or prolonged exposure is not known to aggravate medical condition.

### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at

least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

### Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** Not available.

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Some metallic oxides.

**Fire Hazards in Presence of Various Substances:**

Highly flammable in presence of open flames and sparks, of heat.

Flammable in presence of acids, of moisture.

Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

Explosive in presence of acids, of moisture.

**Fire Fighting Media and Instructions:**

Flammable solid.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:**

Magnesium turnings, chips or granules, ribbons, are flammable. They can be easily ignited. They may reignite after fire is extinguished. Produces flammable gases on contact with water and acid. May ignite on contact with water or moist air.

Magnesium fires do not flare up violently unless moisture is present.

**Special Remarks on Explosion Hazards:** Reacts with acids and water to form hydrogen gas with is highly flammable and explosive

### Section 6: Accidental Release Measures

**Small Spill:** Use appropriate tools to put the spilled solid in a convenient waste disposal container.

**Large Spill:**

Flammable solid.

Stop leak if without risk. Do not touch spilled material. Use water spray curtain to divert vapor drift. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal.

## Section 7: Handling and Storage

**Precautions:**

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not breathe dust. Keep away from incompatibles such as oxidizing agents, acids, moisture.

**Storage:**

Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame). Moisture sensitive. Dangerous when wet.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Metal solid)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 24.31 g/mole

**Color:** Silver-white

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 1100°C (2012°F)

**Melting Point:** 651°C (1203.8°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 1.74 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Very slightly soluble in hot water.

Insoluble in cold water.

Insoluble in chromium trioxides, and mineral acids, alkalis.

Slightly soluble with decomposition in hot water.

Soluble in concentrated hydrogen fluoride, and ammonium salts.

### Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Heat, incompatible materials, water or moisture, moist air.

**Incompatibility with various substances:** Reactive with oxidizing agents, acids, moisture.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Violent chemical reaction with oxidizing agents.

Reacts with water to create hydrogen gas and heat. Must be kept dry.

Reacts with acids to form hydrogen gas which is highly flammable and explosive.

Magnesium forms hazardous or explosive mixtures with aluminum and potassium perchlorate; ammonium nitrate; barium nitrate, barium dioxide and zinc; beryllium oxide; boron phosphodiiodide; bromobenzyl trifluoride; cadmium cyanide; cadmium oxide; calcium carbide; carbonates; carbon tetrachloride; chlorine; chlorine trifluoride; chloroform; cobalt cyanide; copper cyanide; copper sulfate(anhydrous), ammonium nitrate, potassium chlorate and water; cupric oxide; cupric sulfate; fluorine; gold cyanide; hydrogen and calcium carbonate; hydrogen iodide; hydrogen peroxide; iodine; lead cyanide; mercuric oxide; mercury cyanide; methyl chloride; molybdenum trioxide; nickel cyanide; nitric acid; nitrogen dioxide; oxygen (liquid); performic acid; phosphates; potassium chlorate; potassium perchlorate; silver nitrate; silver oxide; sodium perchlorate; sodium peroxide; sodium peroxide and carbon dioxide; stannic oxide; sulfates; trichloroethylene; zinc cyanide; zinc oxide.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

### Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available.

LC50: Not available.

**Chronic Effects on Humans:** Not available.

**Other Toxic Effects on Humans:** Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects:

Skin: May cause skin irritation by mechanical action. May get mechanical injury or embedding of chips/particles in skin. The particles that are embedded in the wounds may retard healing.

Eyes: May cause eye irritation by mechanical action. Mechanical injury may occur. Particles or chips may embed in eye and retard healing.

Inhalation: Low hazard for usual industrial handling. It may cause respiratory tract irritation. However, it is unlikely due to physical form. When Magnesium metal is heated during welding or smelting process, Metal Fume Fever may result from inhalation of magnesium fumes. Metal Fume Fever is a flu-like condition consisting of fever, chills, sweating, aches, pains, cough, weakness, headache, nausea, vomiting, and breathing difficulty. Other symptoms may include metallic taste, increased white blood cell count. There is no permanent ill-effect.

Ingestion: Low hazard for usual industrial handling. There are no known reports of serious industrial poisonings with Magnesium. Ingestion of large amounts of chips, turnings or ribbons may cause gastrointestinal tract irritation with nausea, vomiting, and diarrhea. Acute ingestion may also result in Hypermagnesia.

Hypermagnesia may cause hypotension, bradycardia, CNS depression, respiratory depression, and impairment of neuromuscular transmission (hyporeflexia, paralysis).

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** CLASS 4.1: Flammable solid.

**Identification:** : Magnesium UNNA: 1869 PG: III

**Special Provisions for Transport:** Not available.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

Connecticut hazardous material survey.: Magnesium

Rhode Island RTK hazardous substances: Magnesium

Pennsylvania RTK: Magnesium

Massachusetts RTK: Magnesium  
Massachusetts spill list: Magnesium  
New Jersey: Magnesium  
TSCA 8(b) inventory: Magnesium

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).  
EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):**

CLASS B-4: Flammable solid.  
CLASS B-6: Reactive and very flammable material.

**DSCL (EEC):**

R11- Highly flammable.  
R15- Contact with water liberates extremely flammable gases.  
S7/8- Keep container tightly closed and dry.  
S43- In case of fire, use dry chemical. Never use water.

**HMIS (U.S.A.):**

**Health Hazard:** 1

**Fire Hazard:** 3

**Reactivity:** 2

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 0

**Flammability:** 1

**Reactivity:** 1

**Specific hazard:**

**Protective Equipment:**

Gloves.  
Lab coat.  
Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.  
Safety glasses.

**Section 16: Other Information**


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/09/2005 06:00 PM

**Last Updated:** 11/06/2008 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	2
Fire	0
Reactivity	0
Personal Protection	E

## Material Safety Data Sheet Nickel metal MSDS

### Section 1: Chemical Product and Company Identification

<p><b>Product Name:</b> Nickel metal</p> <p><b>Catalog Codes:</b> SLN2296, SLN1342, SLN1954</p> <p><b>CAS#:</b> 7440-02-0</p> <p><b>RTECS:</b> QR5950000</p> <p><b>TSCA:</b> TSCA 8(b) inventory: Nickel metal</p> <p><b>CI#:</b> Not applicable.</p> <p><b>Synonym:</b> Nickel Metal shot; Nickel metal foil.</p> <p><b>Chemical Name:</b> Nickel</p> <p><b>Chemical Formula:</b> Ni</p>	<p><b>Contact Information:</b></p> <p><b>Sciencelab.com, Inc.</b> 14025 Smith Rd. Houston, Texas 77396</p> <p>US Sales: <b>1-800-901-7247</b> International Sales: <b>1-281-441-4400</b></p> <p>Order Online: <a href="http://ScienceLab.com">ScienceLab.com</a></p> <p><b>CHEMTREC (24HR Emergency Telephone), call:</b> 1-800-424-9300</p> <p><b>International CHEMTREC, call:</b> 1-703-527-3887</p> <p><b>For non-emergency assistance, call:</b> 1-281-441-4400</p>
---	--

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Nickel metal	7440-02-0	100

**Toxicological Data on Ingredients:** Nickel metal LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of inhalation. Slightly hazardous in case of skin contact (irritant, sensitizer), of eye contact (irritant), of ingestion.

**Potential Chronic Health Effects:**

Slightly hazardous in case of skin contact (sensitizer), of ingestion, of inhalation (lung sensitizer).  
**CARCINOGENIC EFFECTS:** Classified 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP.  
**MUTAGENIC EFFECTS:** Not available.  
**TERATOGENIC EFFECTS:** Not available.  
**DEVELOPMENTAL TOXICITY:** Not available.  
 The substance is toxic to skin.  
 The substance may be toxic to kidneys, lungs, liver, upper respiratory tract.  
 Repeated or prolonged exposure to the substance can produce target organs damage.

## Section 4: First Aid Measures

### Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

### Skin Contact:

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Cover the irritated skin with an emollient. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

**Serious Skin Contact:** Not available.

### Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

### Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Non-flammable.

**Auto-Ignition Temperature:** Not applicable.

**Flash Points:** Not applicable.

**Flammable Limits:** Not applicable.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:** Not applicable.

### Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

### Fire Fighting Media and Instructions:

Flammable solid.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:** Material in powder form, capable of creating a dust explosion. This material is flammable in powder form only.

### Special Remarks on Explosion Hazards:

Material in powder form, capable of creating a dust explosion.

Mixtures containing Potassium Perchlorate with Nickel & Titanium powders & infusorial earth can explode.

Adding 2 or 3 drops of approximately 90% peroxyformic acid to powdered nickel will result in explosion.

Powdered nickel reacts explosively upon contact with fused ammonium nitrate at temperatures below 200 deg. C.

## Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up.. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If you feel unwell, seek medical attention and show the label when possible. Keep away from incompatibles such as oxidizing agents, combustible materials, metals, acids.

**Storage:** Keep container tightly closed. Keep container in a cool, well-ventilated area.

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 1 (mg/m<sup>3</sup>) from ACGIH (TLV) [United States] Inhalation Respirable.

TWA: 0.5 (mg/m<sup>3</sup>) [United Kingdom (UK)]

TWA: 1 (mg/m<sup>3</sup>) from OSHA (PEL) [United States] Inhalation Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Metal solid. Lustrous solid.)

**Odor:** Odorless.

**Taste:** Not available.

**Molecular Weight:** 58.71 g/mole

**Color:** Silvery.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 2730°C (4946°F)

**Melting Point:** 1455°C (2651°F)

**Critical Temperature:** Not available.

**Specific Gravity:** Density: 8.908 (Water = 1)

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:**

Insoluble in cold water, hot water.

Insoluble in Ammonia.

Soluble in dilute Nitric Acid.

Slightly soluble in Hydrochloric Acid, Sulfuric Acid.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Incompatible materials

**Incompatibility with various substances:** Reactive with oxidizing agents, combustible materials, metals, acids.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Incompatible with strong acids, selenium, sulfur, wood and other combustibles, nickel nitrate, aluminum, aluminum trichloride, ethylene, p-dioxan, hydrogen, methanol, non-metals, oxidants, sulfur compounds, aniline, hydrogen sulfide, flammable solvents, hydrazine, and metal powders (especially zinc, aluminum, and magnesium), ammonium nitrate, nitryl fluoride, bromine pentafluoride, potassium perchlorate + titanium powder + industrial earth.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available.

LC50: Not available.

**Chronic Effects on Humans:**

CARCINOGENIC EFFECTS: Classified 2B (Possible for human.) by IARC. Classified 2 (Some evidence.) by NTP.

Causes damage to the following organs: skin.

May cause damage to the following organs: kidneys, lungs, liver, upper respiratory tract.

**Other Toxic Effects on Humans:**

Hazardous in case of inhalation.  
Slightly hazardous in case of skin contact (irritant, sensitizer), of ingestion.

**Special Remarks on Toxicity to Animals:**

Lowest Published Lethal Dose/Conc:  
LDL [Rat] - Route: Oral; Dose: 5000 mg/kg  
LDL [Guinea Pig] - Route: Oral; Dose: 5000 mg/kg

**Special Remarks on Chronic Effects on Humans:** May cause cancer based on animal test data

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects:  
Skin: Nickel dust and fume can irritate skin.  
Eyes: Nickel dust and fume can irritate eyes.  
Inhalation: Inhalation of dust or fume may cause respiratory tract irritation with non-productive cough, hoarseness, sore throat, headache, vertigo, weakness, chest pain, followed by delayed effects, including tachypnea, dyspnea, and ARDS. Death due to ARDS has been reported following inhalation of high concentrations of respirable metallic nickel dust. Later effects may include pulmonary edema and fibrosis.  
Ingestion: Metallic nickel is generally considered not to be acutely toxic if ingested. Ingestion may cause nausea, vomiting, abdominal , and diarrhea. Nickel may damage the kidneys(proteinuria), and may affect liver function. It may also affect behavior (somnia), and cardiovascular system (increased coronary artery resistance, decreased myocardial contractility, myocardial damage, regional or general arteriolar or venus dilation).  
Chronic Potential Health Effects:  
Skin: May cause skin allergy. Nickel and nickel compounds are among the most common sensitizers inducing allergic contact dermatitis.  
Inhalation: Chronic inhalation nickel dust or fume can cause chronic hypertrophic rhinitis, sinusitis, nasal polyps, perforation of the nasal septum, chronic pulmonary irritation, fibrosis, pulmonary edema, pulmonary eosinophilia, Pneumoconiosis, allergies (asthma-like allergy), and cancer of the nasal sinus cavities, lungs, and possibly other organs. Future exposures can cause asthma attacks with shortness of breath, wheezing, cough, and/or chest tightness. Chronic inhalation of nickel dust or fume may also affect the liver (impaired liver function tests), and blood (changes in red blood cell count).  
Ingestion: Prolonged or repeated ingestion of nickel can be a source chronic urticaria and other signs of allergy. Chronic ingestion of Nickel may also affect respiration and cause pneumoconiosis or fibrosis.  
Note: In the general population, sensitization occurs from exposure to nickel-containing coins, jewelry, watches,

**Section 12: Ecological Information**

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The products of degradation are as toxic as the original product.

**Special Remarks on the Products of Biodegradation:** Not available.

**Section 13: Disposal Considerations**

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

**Section 14: Transport Information**

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

## Section 15: Other Regulatory Information

### Federal and State Regulations:

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer, birth defects or other reproductive harm, which would require a warning under the statute: Nickel metal

California prop. 65: This product contains the following ingredients for which the State of California has found to cause cancer which would require a warning under the statute: Nickel metal

Connecticut hazardous material survey.: Nickel metal

Illinois toxic substances disclosure to employee act: Nickel metal

Illinois chemical safety act: Nickel metal

New York release reporting list: Nickel metal

Rhode Island RTK hazardous substances: Nickel metal

Pennsylvania RTK: Nickel metal

Michigan critical material: Nickel metal

Massachusetts RTK: Nickel metal

Massachusetts spill list: Nickel metal

New Jersey: Nickel metal

New Jersey spill list: Nickel metal

Louisiana spill reporting: Nickel metal

California Director's List of Hazardous Substances: Nickel metal

TSCA 8(b) inventory: Nickel metal

### Other Regulations:

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200).

EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

### Other Classifications:

**WHMIS (Canada):** CLASS D-2A: Material causing other toxic effects (VERY TOXIC).

### DSCL (EEC):

R40- Possible risks of irreversible effects.

R43- May cause sensitization by skin contact.

S22- Do not breathe dust.

S36- Wear suitable protective clothing.

### HMIS (U.S.A.):

**Health Hazard:** 2

**Fire Hazard:** 0

**Reactivity:** 0

**Personal Protection:** E

### National Fire Protection Association (U.S.A.):

**Health:** 2

**Flammability:** 0

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves.  
Lab coat.  
Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.  
Safety glasses.

**Section 16: Other Information**


**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:42 PM

**Last Updated:** 11/06/2008 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



Health	1
Fire	1
Reactivity	1
Personal Protection	E

## Material Safety Data Sheet Zinc Metal MSDS

### Section 1: Chemical Product and Company Identification

**Product Name:** Zinc Metal

**Catalog Codes:** SLZ1054, SLZ1159, SLZ1267, SLZ1099, SLZ1204

**CAS#:** 7440-66-6

**RTECS:** ZG8600000

**TSCA:** TSCA 8(b) inventory: Zinc Metal

**CI#:** Not applicable.

**Synonym:** Zinc Metal Sheets; Zinc Metal Shot; Zinc Metal Strips

**Chemical Name:** Zinc Metal

**Chemical Formula:** Zn

**Contact Information:**

**Sciencelab.com, Inc.**  
14025 Smith Rd.  
Houston, Texas 77396

US Sales: **1-800-901-7247**  
International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**  
1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

### Section 2: Composition and Information on Ingredients

**Composition:**

Name	CAS #	% by Weight
Zinc Metal	7440-66-6	100

**Toxicological Data on Ingredients:** Zinc Metal LD50: Not available. LC50: Not available.

### Section 3: Hazards Identification

**Potential Acute Health Effects:** Slightly hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation.

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available.

MUTAGENIC EFFECTS: Not available.

TERATOGENIC EFFECTS: Not available.

DEVELOPMENTAL TOXICITY: Not available.

Repeated or prolonged exposure is not known to aggravate medical condition.

### Section 4: First Aid Measures

**Eye Contact:**

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:** Not available.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

**Serious Inhalation:** Not available.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 480°C (896°F)

**Flash Points:** Not available.

**Flammable Limits:** Not available.

**Products of Combustion:** Not available.

**Fire Hazards in Presence of Various Substances:**

Slightly flammable to flammable in presence of open flames and sparks, of heat, of oxidizing materials, of acids, of alkalis, of moisture.

Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available.

Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable solid.

SMALL FIRE: Use DRY chemical powder.

LARGE FIRE: Use water spray or fog. Cool containing vessels with water jet in order to prevent pressure build-up, autoignition or explosion.

**Special Remarks on Fire Hazards:**

Zinc + NaOH causes ignition.

Oxidation of zinc by potassium proceeds with incandescence.

Residues from zinc dust /acetic acid reduction operations may ignite after long delay if discarded into waste bins with paper.

Incandescent reaction when Zinc and Arsenic or Tellurium, or Selenium are combined.

When hydrazine mononitrate is heated in contact with zinc, a flaming decomposition occurs at temperatures a little above its melting point.

Contact with acids and alkali hydroxides (sodium hydroxide, potassium hydroxide, calcium hydroxide, etc.) results in evolution of hydrogen with sufficient heat of reaction to ignite the hydrogen gas.

Zinc foil ignites if traces of moisture are present.

It is water reactive and produces flammable gases on contact with water. It may ignite on contact with water or

moist air.

**Special Remarks on Explosion Hazards:** Not available.

### Section 6: Accidental Release Measures

**Small Spill:**

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

**Large Spill:**

Flammable solid that, in contact with water, emits flammable gases.  
Stop leak if without risk. Do not get water inside container. Do not touch spilled material. Cover with dry earth, sand or other non-combustible material. Prevent entry into sewers, basements or confined areas; dike if needed. Eliminate all ignition sources. Call for assistance on disposal. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

### Section 7: Handling and Storage

**Precautions:**

Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not breathe dust. Keep away from incompatibles such as oxidizing agents, acids, alkalis, moisture.

**Storage:**

Keep container tightly closed. Keep container in a cool, well-ventilated area. Keep from any possible contact with water. Do not allow water to get into container because of violent reaction.

### Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

**Personal Protection:** Safety glasses. Lab coat. Dust respirator. Be sure to use an approved/certified respirator or equivalent. Gloves.

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:** Not available.

### Section 9: Physical and Chemical Properties

**Physical state and appearance:** Solid. (Lustrous solid. Metal solid.)

**Odor:** Not available.

**Taste:** Not available.

**Molecular Weight:** 65.39 g/mole

**Color:** Bluish-grey

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 907°C (1664.6°F)

**Melting Point:** 419°C (786.2°F)

**Critical Temperature:** Not available.

**Specific Gravity:** Not available.

**Vapor Pressure:** Not applicable.

**Vapor Density:** Not available.

**Volatility:** Not available.

**Odor Threshold:** Not available.

**Water/Oil Dist. Coeff.:** Not available.

**Ionicity (in Water):** Not available.

**Dispersion Properties:** Not available.

**Solubility:** Insoluble in cold water, hot water, methanol, diethyl ether, n-octanol, acetone.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Excess heat, incompatible materials, moisture

**Incompatibility with various substances:**

Reactive with oxidizing agents, acids, alkalis.

Slightly reactive to reactive with moisture.

The product may react violently with water to emit flammable but non toxic gases.

**Corrosivity:** Non-corrosive in presence of glass.

**Special Remarks on Reactivity:**

Incompatible with acids, halogenated hydrocarbons, NH<sub>4</sub>NO<sub>3</sub>, barium oxide, Ba(NO<sub>3</sub>)<sub>2</sub>, Cadmium, CS<sub>2</sub>, chlorates, Cl<sub>2</sub>, CrO<sub>3</sub>, F<sub>2</sub>, Hydroxylamine, Pb(N<sub>3</sub>)<sub>2</sub>, MnCl<sub>2</sub>, HNO<sub>3</sub>, performic acid, KClO<sub>3</sub>, KNO<sub>3</sub>, N<sub>2</sub>O<sub>2</sub>, Selenium, NaClO<sub>3</sub>, Na<sub>2</sub>O<sub>2</sub>, Sulfur, Te, water, (NH<sub>4</sub>)<sub>2</sub>S, As<sub>2</sub>O<sub>3</sub>, CS<sub>2</sub>, CaCl<sub>2</sub>, chlorinated rubber, catalytic metals, halocarbons, o-nitroanisole, nitrobenzene, nonmetals, oxidants, paint primer base, pentacarbonoyliron, transition metal halides, seleninyl bromide, HCl, H<sub>2</sub>SO<sub>4</sub>, (Mg +Ba(NO<sub>3</sub>)<sub>2</sub> +BaO<sub>2</sub>), (ethyl acetoacetate +tribromoneopentyl alcohol.

Contact with Alkali Hydroxides(Sodium Hydroxide, Potassium Hydroxide, Calcium Hydroxide, etc) results in evolution of hydrogen.

Ammonium nitrate + zinc + water causes a violent reaction with evolution of steam and zinc oxide.

May react with water.

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Inhalation. Ingestion.

**Toxicity to Animals:**

LD50: Not available.

LC50: Not available.

**Chronic Effects on Humans:** Not available.

**Other Toxic Effects on Humans:** Slightly hazardous in case of skin contact (irritant), of ingestion, of inhalation.

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:** Not available.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects:

Skin: May cause skin irritation. Dermal exposure to zinc may produce leg pains, fatigue, anorexia and weight loss.

Eyes: May cause eye irritation.

Ingestion: May be harmful if swallowed. May cause digestive tract irritation with tightness in throat, nausea, vomiting, diarrhea, loss of appetite, malaise, abdominal pain, fever, and chills. May affect behavior/central nervous system and autonomic nervous system with ataxia, lethargy, staggering gait, mild derangement in cerebellar function, lightheadness, dizziness, irritability, muscular stiffness, and pain. May also affect blood.

Inhalation: Inhalation of zinc dust or fumes may cause respiratory tract and mucous membrane irritation with cough and chest pain. It can also cause "metal fume fever", a flu-like condition characterized appearance of chills, headachefever, malaise, fatigue, sweating, extreme thirst, aches in the legs and chest, and difficulty in breathing. A sweet taste may also be present in metal fume fever, as well as a dry throat, aches, nausea, and vomiting, and pale grey cyanosis.

The toxicological properties of this substance have not been fully investigated.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** Not available.

**Special Remarks on the Products of Biodegradation:** Not available.

## Section 13: Disposal Considerations

**Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

## Section 14: Transport Information

**DOT Classification:** Not a DOT controlled material (United States).

**Identification:** Not applicable.

**Special Provisions for Transport:** Not applicable.

## Section 15: Other Regulatory Information

**Federal and State Regulations:**

New York release reporting list: Zinc Metal  
Rhode Island RTK hazardous substances: Zinc Metal  
Pennsylvania RTK: Zinc Metal  
Florida: Zinc Metal  
Michigan critical material: Zinc Metal  
Massachusetts RTK: Zinc Metal  
New Jersey: Zinc Metal  
California Director's List of Hazardous Substances: Zinc Metal  
TSCA 8(b) inventory: Zinc Metal  
TSCA 12(b) one time export: Zinc Metal  
SARA 313 toxic chemical notification and release reporting: Zinc Metal  
CERCLA: Hazardous substances.: Zinc Metal: 1000 lbs. (453.6 kg)

**Other Regulations:** EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:**

**WHMIS (Canada):** Not Available

**DSCL (EEC):**

R15- Contact with water liberates extremely flammable gases.  
R17- Spontaneously flammable in air.  
S7/8- Keep container tightly closed and dry.

**HMIS (U.S.A.):**

**Health Hazard:** 1

**Fire Hazard:** 1

**Reactivity:** 1

**Personal Protection:** E

**National Fire Protection Association (U.S.A.):**

**Health:** 0

**Flammability:** 1

**Reactivity:** 1

**Specific hazard:**

**Protective Equipment:**

Gloves.  
Lab coat.  
Dust respirator. Be sure to use an approved/certified respirator or equivalent.  
Safety glasses.

## Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 12:18 AM

**Last Updated:** 11/06/2008 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*

[Home](#) > [CABS](#) > Lead**ToxFAQs™: Chemical Agent Briefing Sheets (CABS)**

# Lead

January 2006

 [Email this page](#) [Printer-friendly version](#) [PDF Version](#)

- [What is lead?](#)
- [What are the forms of lead?](#)
- [What are the common uses of lead?](#)
- [What are the routes of exposure for lead?](#)
- [Who are the populations most at risk and how are they usually exposed?](#)
- [What are the possible toxic effects of lead?](#)
- [How can I reduce the risk of exposure to lead?](#)
- [What are the safety guidelines for lead exposure?](#)
- [What are the most important or common mediating factors?](#)
- [Is there a test to see if my child or I have been exposed to lead?](#)
- [Future Research Needs](#)
- [For more information](#)

## What is lead?

Lead is a heavy, bluish-gray metal that has a low melting point. It occurs naturally in the Earth's crust, but it is not a particularly abundant element. It is rarely found naturally as a metal, but rather in its divalent (2+) oxidative state in ore deposits widely distributed throughout the world. The most important lead containing ores are galena (PbS), anglesite (PbSO<sub>4</sub>), and cerussite (PbCO<sub>3</sub>). Natural lead is a mixture of four stable isotopes: <sup>208</sup>Pb (51%–53%), <sup>206</sup>Pb (23.5%–27%), <sup>207</sup>Pb (20.5%–23%), and <sup>204</sup>Pb (1.35%–1.5%).

## What are the forms of lead?

- Metallic lead
- Inorganic lead and lead compounds (or lead salts)
- Organic lead (containing carbon)

## What are the common uses of lead?

The largest use for lead is in storage batteries in cars and other vehicles. Lead may be used as a pure metal, alloyed with other metals, or as chemical compounds.

Lead used by industry comes from mined ores ("primary") or from recycled scrap metal or batteries ("secondary"). However, most lead today is obtained from recovery of recycled scrap, mostly lead-acid batteries.

Human activities, such as lead mining and smelting operations and manufacturing and use of lead products (e.g., leaded gasoline, lead-based paint), have resulted in the contamination of many industrial and residential areas with lead.

Form	Uses
<b>Metallic lead</b>  <b>Lead and lead compounds (or lead salts), such as</b> <ul style="list-style-type: none"> <li>• lead acetate</li> <li>• lead chloride</li> <li>• lead nitrate</li> <li>• lead oxide</li> <li>• lead phosphate</li> <li>• lead acetate</li> </ul>	Certain uses of lead, such as leaded gasoline, lead-based paints for domestic use, lead-based solder in food cans and water pipes, lead sinkers, and ammunition, have been reduced or banned to minimize lead's harmful effects on people and animals. <ul style="list-style-type: none"> <li>• <b>Cosmetics and hair dye</b> - Some hair dyes and some non-Western cosmetics, such as kohl and surma, contain lead.</li> <li>• <b>Fishing equipment</b> - Most fishing weights and sinkers are made from lead.</li> <li>• <b>Folk remedies</b> - Many non-Western folk remedies used to treat diarrhea or other ailments may contain substantial amounts of lead. Examples of these include alarcon, ghasard, alkohl, greta, azarcon,</li> </ul>

- **lead sulfate**
- **lead sulfide**

liga, bali goli, pay-loo-ah, coral, and rueda.

- **Glazing** - Applied to some ceramicware can contain lead.
- **Lead based paint** - Although the sale of residential lead-based paint was banned in the United States in 1978, it remains a major source of lead exposure for young children residing in older houses.
- **Lead batteries** - Production of lead-acid batteries is the major use of lead.
- **Lead-based solder** - Has been banned for use in water distribution systems, but many buildings and homes contain lead pipes or lead-based solder. Lead-based solder also is used for electrical circuitry applications.
- **Lead-shot and ammunition** - It is the second highest production use of lead.
- Other uses of lead include the production of lead alloys, soldering materials, shielding for x-ray machines, and manufacturing of corrosion- and acid-resistant materials used in the building industry.

#### Organic

- **tetraethyl lead**
- **tetramethyl lead**

The use of lead in gasoline was phased out in the 1980s, and has been banned since January 1, 1996. The use of lead in gasoline has contributed to its dispersion throughout the environment. During the combustion of gasoline containing these alkyllead compounds, significant amounts of inorganic lead can be released to the surrounding areas.

#### Current Uses

- Gasoline for off-road vehicles, farm equipment, and airplanes

#### Past Uses

- Gasoline additives (to increase octane rating)

### What are the routes of exposure for lead?

People are most likely to be exposed to lead by consuming contaminated food and drinking water. Exposure can also occur by inadvertently ingesting contaminated soil, dust, or lead-based paint.

Form	Routes of Exposure
<p><b>Metallic lead</b></p> <p><b>Lead and lead compounds (or lead salts), such as</b></p> <ul style="list-style-type: none"> <li>• <b>lead acetate</b></li> <li>• <b>lead chloride</b></li> <li>• <b>lead nitrate</b></li> <li>• <b>lead oxide</b></li> <li>• <b>lead phosphate</b></li> <li>• <b>lead subacetate</b></li> <li>• <b>lead sulfate</b></li> <li>• <b>lead sulfide</b></li> </ul>	<ul style="list-style-type: none"> <li>• Ingestion is the primary source of exposure to the general population.</li> <li>• Lead paint is a major source of environmental exposure for children who ingest flaking paint, paint chips, and weathered powdered paint (mostly from deteriorated housing units in urban areas). Lead paint can also contribute to soil/dust lead which can be inadvertently ingested via hand-to-mouth activity of young children.</li> <li>• Lead can leach into drinking water from lead-based solder used in water pipes.</li> <li>• Lead can leach into foods or liquids stored in ceramic containers made with lead glazing.</li> <li>• Engaging in hobbies such as casting ammunition, making fishing weights, and stained glass can result in exposure to lead.</li> <li>• Exposure by inhalation can result during activities such as soldering with lead solder or sanding or sandblasting lead-based paint.</li> </ul>
<p><b>Organic</b></p> <ul style="list-style-type: none"> <li>• <b>tetraethyl lead</b></li> <li>• <b>tetramethyl lead</b></li> </ul>	<ul style="list-style-type: none"> <li>• Inhalation</li> <li>• Dermal studies in animals have shown that organic lead is well absorbed through the skin</li> </ul>

### Who are the populations most at risk and how are they usually exposed?

People living near hazardous waste sites, lead smelters or refineries, battery recycling or crushing centers, or other industrial lead sources may be exposed to lead and chemicals that contain lead. Workers in occupations that have sources of lead exposure ( e.g., plumbers, miners, mechanics, and lead smelter or refinery workers).

Certain hobbies, folk remedies, home activities, and car repairs ( e.g., radiator repair) can contribute to lead exposure. Smoking cigarettes or breathing second-hand smoke increases exposure because tobacco smoke contains small amounts of lead.

Pregnant women, the developing fetuses, and young children are particularly vulnerable to the effects of lead. Young children are more likely to play in dirt and to place their hands and other objects in their

mouths, thereby increasing the opportunity for exposure via ingestion of lead-contaminated soil and dust.

### What are the possible toxic effects of lead?

The most sensitive targets for lead toxicity are the developing nervous system, the hematological and cardiovascular systems, and the kidney. However, because of lead's many modes of action in biological systems, lead could potentially affect any system or organs in the body. The effects are the same whether it is breathed or swallowed.

#### Blood Lead Concentrations Corresponding to Adverse Health Effects

Life Stage	Effect	Blood lead (µg/dL)
<b>Children</b>	Depressed ALAD* activity	<5
	Neurodevelopmental effects	<10
	Sexual maturation	<10
	Depressed vitamin D	>15
	Elevated EP**	>15
	Depressed NCV***	>30
	Depressed hemoglobin	>40
	Colic	>60
<b>Adults</b>	Depressed GFR****	<10
	Elevated blood pressure	<10
	Elevated EP (females)	>20
	Enzymuria/proteinuria	>30
	Peripheral neuropathy	>40
	Neurobehavioral effects	>40
	Altered thyroid hormone	>40
	Reduced fertility	>40
<b>Elderly adults</b>	Depressed hemoglobin	>50
	Depressed ALAD*	<5
	Neurobehavioral effects	>4

\*aminolevulinic acid dehydratase (ALAD)

\*\*erythrocyte porphyrin (EP)

\*\*\*nerve conduction velocity (NCV)

\*\*\*\*glomerular filtration rate (GFR)

Source: ATSDR Toxicological Profile for Lead (Draft for Public Comment), 2005.

### How can I reduce the risk of exposure to lead?

- Do not allow children to chew or mouth surfaces that may have been painted with lead-based paint (homes built before 1978).
- If you have a water lead problem, the U.S. Environmental Protection Agency (EPA) recommends that you flush your cold water pipes if they have not been used in over 6 hours by running water until it is cold (5 seconds to 2 minutes) before drinking or cooking with it.
- Avoid some types of paints and pigments that contain lead and are used as make-up or hair coloring; keep these kinds of products away from children.
- Hire a professional contractor, who is required to follow certain health safety requirements for remediation or renovation involving lead-based paint, ([www.epa.gov/lead/pubs/leadinfo.htm#remodeling](http://www.epa.gov/lead/pubs/leadinfo.htm#remodeling)).
- Wash children's hands and faces often to remove lead dusts and soil, and regularly clean the house of dust and tracked in soil.

### What are the safety guidelines for lead exposure?

#### Air

- [National Institute for Occupational Safety and Health](#) (NIOSH)

Recommended exposure limit (REL) time-weighted average (TWA) - 0.05 mg/m<sup>3</sup>  
Immediately dangerous to life or health (IDLH) - 100 mg/m<sup>3</sup>

- [Occupational Safety and Health Administration](#) (OSHA)

Air - workplace 50 µg/m<sup>3</sup>  
Action level - 40 µg/100 g of whole blood

- The [American Conference of Governmental Industrial Hygienists](#) (ACGIH)

Threshold limit values (TLV)/(TWA) - 0.05 mg/m<sup>3</sup>  
 TLV/TWA guideline for lead arsenate - 150 µg/m<sup>3</sup>  
 TLV/TWA guideline for other forms of lead - 50 µg lead/m<sup>3</sup>

- [U.S. Environmental Protection Agency](#) (EPA)

National Primary and Secondary Ambient Air Quality Standards - 1.5 µg/m<sup>3</sup>

- [World Health Organization](#) (WHO)

Air quality guidelines -- 0.5 µg/m<sup>3</sup>

#### Water

- EPA

Maximum contaminant level (MCL) - action level 0.015 mg/L  
 Action level for public supplies - 15 µg/L

- WHO

Drinking Water Quality Guidelines - 0.01 mg/L

#### Blood

- [Centers for Disease Control and Prevention](#) (CDC)

Level of concern for children - 10 µg/dL

- OSHA

Cause for written notification and medical exam - 40 µg/dL  
 Cause for medical removal from exposure - 50 µg/dL

- ACGIH

Advisory; biological exposure index - 30 µg/dL

#### Food

- [Food and Drug Administration](#) (FDA)

Bottled drinking water - 0.005 mg/L

#### Other

- ACGIH

Biological exposure indices (lead in blood) - 30 µg/100 mL

- [Consumer Product Safety Commission](#)

Paint - 600 ppm

- FDA

Ceramicware (µg/mL leaching solution) - 0.5-3.0 µg/mL

µg/m<sup>3</sup>: micrograms per cubic meter  
 µg/dL: micrograms per deciliter  
 µg/L: micrograms per liter  
 g: gram

mg/L: milligrams per liter  
 mL: milliliter  
 ppm: parts per million

### What are the most important or common mediating factors?

Factors that determine the severity of the health effects from lead exposure include

- Dose
- Age of the person exposed
  - the developing nervous system is the most sensitive system to the effects of lead
  - the efficiency of lead absorption from the gastrointestinal tract is greater in children than in adults
- Life stages of women (childbirth, lactating, menopause)
- Occupational exposures
- Duration of exposure
- Health and lifestyle of the person exposed
- Nutritional status of the person exposed
  - a diet adequate in calcium and iron may decrease lead absorption

The toxic effects of lead exposure may be worse in individuals with inherited genetic diseases or gene polymorphisms such as thalassemia, individuals with glucose-6-phosphate dehydrogenase (G6PD) deficiency, and carriers of certain gene polymorphic forms (e.g., ALAD and vitamin D receptor). Research continues about this topic.

## Is there a test to see if my child or I have been exposed to lead?

- Blood**
- The screening test of choice is blood lead levels.
  - Blood tests are commonly used to screen children for lead poisoning.
  - Analysis of lead in whole blood is the most common and accurate method of assessing lead exposure.
  - Exposure to lead also can be evaluated by measuring erythrocyte protoporphyrin (EP) in blood samples. EP is a part of red blood cells known to increase when the amount of lead in the blood is high. However, the EP level is not sensitive enough to identify children with elevated blood lead levels below about 25 micrograms per deciliter (µg/dL).
- Bone and Teeth**
- X-ray fluorescence techniques have been used to determine lead concentration in bones and teeth. It is not widely available and is used mostly in research.
  - Lead partitions to bone over a lifetime of exposure; therefore, bone lead measurements may be a better indicator of cumulative exposure than blood lead.
- Urine**
- Measurements of urinary lead levels have been used to assess lead exposure.
  - The measurement of lead excreted in urine following chelation with calcium disodium EDTA (EDTA provocation) has been used to detect elevated body burden of lead in adults and children.
- Hair and Nails**
- These are not reliable for testing due to errors external contamination. They are relatively poor predictors of blood lead, particularly at low concentrations.

## Future Research Needs

To close current gaps in the scientific database on the health effects of lead, a long-term research program is needed that might include the following:

- Further short-term studies or studies in vitro designed to clarify mechanisms of action for the various toxicities might be useful.
- Studies identifying exposures during different developmental periods can help identify critical periods of vulnerability for immunocompetence, development of sex organs, or neurobehavioral parameters.
- Chronic-duration exposure studies in animals would expand information on the toxicity of lead. Special studies that examine biochemical and morphological effects of lead may provide new information on mechanisms of action of lead, particularly for the effects of greatest concern such as neurobehavioral changes in children.
- Development of new and more sensitive tests of specific neuropsychological functions.
- Further investigation of links between lead and amyotrophic lateral sclerosis, essential tremor, schizophrenia, and Parkinson's disease.
- Epidemiological studies designed in a manner that permits more rigorous assessments of effect modification.
- Studies about the long-term consequences of lead-related neurobehavioral deficits detected in infants and children and the manifestation of chronic neurobehavioral problems in adolescence and adulthood.
- Further characterization of bone lead concentration as a biomarker of exposure for various effect end points (e.g., blood pressure and renal effects).
- Studies of the potential prevalence of elevated bone lead stores in women of reproductive age and the associated risk that this poses to fetal development by mobilization of maternal bone stores during pregnancy.
- Further clarification of the role of some genetic polymorphisms.
- Evaluation of cohorts from prospective studies into adulthood for potential late-appearing effects including cancer.

## For more information

- Agency for Toxic Substances and Disease Registry (ATSDR) Toxicological Profile for Lead  
<http://www.atsdr.cdc.gov/toxprofiles/tp13.html>
- ATSDR ToxFAQs™ for Lead  
<http://www.atsdr.cdc.gov/tfacts13.html>
- ATSDR Case Studies in Environmental Medicine Lead Toxicity  
<http://www.atsdr.cdc.gov/csem/lead/>
- ATSDR Interaction Profile for Chemical Mixtures for Arsenic, Cadmium, Chromium, and Lead  
<http://www.atsdr.cdc.gov/interactionprofiles/ip04.html>

- ATSDR Interaction Profile for Chemical Mixtures for Lead, Manganese, Zinc, and Copper  
<http://www.atsdr.cdc.gov/interactionprofiles/ip06.html>
- ATSDR Interaction Profile for Chemical Mixtures for Chlorpyrifos, Lead, Mercury, and Methylmercury  
<http://www.atsdr.cdc.gov/interactionprofiles/ip11.html>
- Centers for Disease Control and Prevention Lead Web Page  
<http://www.cdc.gov/lead/>
- U.S. Environmental Protection Agency Lead Web Page  
<http://www.epa.gov/lead/>
- U.S. Department of Labor, Occupational Safety & Health Administration  
<http://www.osha.gov/SLTC/lead/>

**For more information, contact:**

*Agency for Toxic Substances and Disease Registry  
Division of Toxicology and Environmental Medicine  
1600 Clifton Road NE, Mailstop F-32  
Atlanta, GA 30333  
Phone: 1-800-CDC-INFO (800-232-4636)  
TTY 888-232-6348*

*FAX: (770)-488-4178  
Email: [CDCINFO@cdc.gov](mailto:CDCINFO@cdc.gov)*

This page was updated on 01/04/2008



---

## Mercury

Mercury is a naturally occurring metal found in air, water, and soil. It exists in several forms, including elemental (or metallic) mercury, inorganic mercury compounds, and organic mercury compounds:

- **Elemental mercury** is liquid at room temperature and is used in thermometers, fluorescent light bulbs, some electrical switches, and some industrial processes.
- **Inorganic mercury** compounds are formed when mercury combines with other elements to form salts, which are usually powders or crystals. Inorganic mercury compounds are found naturally in the environment. Some forms of inorganic mercury have been used in antiseptic creams, ointments, and preservatives.
- **Organic mercury** compounds are formed when mercury combines with carbon. Microscopic organisms can produce organic mercury compounds (methylmercury) in contaminated water and soil, which can accumulate in the food chain. Other special types of organomercurials have been used as medical preservatives and medicines.

### How People Are Exposed to Mercury

- Eating fish or shellfish that is contaminated with methylmercury, which is the main source of general human exposures to mercury;
- Breathing air contaminated with elemental mercury vapors (e.g., in workplaces such as dental offices and industries that use mercury or in locations where a mercury spill or release has occurred);
- Having dental fillings that contain mercury; and
- Practicing cultural or religious rituals that use mercury.

### How Mercury Affects People's Health

- Short-term exposure to extremely high levels of elemental mercury vapors can result in lung damage, nausea, diarrhea, increases in blood pressure or heart rate, skin rashes, eye irritation, and injury to the nervous system.
- Prolonged exposure to lower levels of elemental mercury can permanently damage the brain and kidneys.
- The developing brain of a fetus can be injured if the mother is exposed to methylmercury.

### Levels of Mercury in U.S. Population

Scientists tested levels of mercury in the blood of 16,780 participants who took part in CDC's national study known as the National Health and Nutrition Examination Survey (NHANES). These findings are based on total blood mercury levels in the U.S. general

population for persons aged 1 year and older who participated in NHANES during 2003-2006, as well as trends in the total mercury of children aged 1-5 and females aged 16-49 during 1999-2006.

- In the total population during 2003-2006, the total blood mercury levels for non-Hispanic blacks and non-Hispanic whites were higher than those for Mexican Americans.
- Across the age groups in the total population during 2003-2006, total blood mercury levels increased with age, peaked at the fifth or sixth decade, depending on race/ethnicity, and then declined.
- In the most recent survey period of 2005-2006, the 95th percentile levels for total blood mercury in children aged 1-5 years and females aged 16-49 years were 1.43 µg/L and 4.48 µg/L, respectively. The 95th percentile means that 95 percent of the U.S. population's exposure is below this estimated level. Conversely, only 5 percent of the population will have values at this level or higher.
- Over the four survey periods from 1999-2006, blood mercury levels increased slightly for non-Hispanic white children and decreased slightly for non-Hispanic black and Mexican American children. Female children had slightly higher blood mercury levels than male children.


#### **For More Information**

- Agency for Toxic Substances and Disease Registry  
Detailed information about mercury and public health is available at <http://www.atsdr.cdc.gov/alerts/970626.html> and <http://www.atsdr.cdc.gov/cabs/mercury/index.html>
- CDC Emergency Preparedness and Response  
Case definitions of mercury, toxicology FAQs, and toxicological profile at <http://emergency.cdc.gov/agent/mercury/>

May 2009

---

The Centers for Disease Control and Prevention (CDC) protects people's health and safety by preventing and controlling diseases and injuries; enhances health decisions by providing credible information on critical health issues; and promotes healthy living through strong partnerships with local, national, and international organizations.



[ATSDR Home](#) > [ToxFAQs™ Arsenic](#)

## ToxFAQs™

ToxFAQs™  
for  
**Arsenic**  
(*Arsénico*)  
August 2007



[PDF Version, 92 KB](#)

CAS#: 7440-38-2

This fact sheet answers the most frequently asked health questions (FAQs) about arsenic. For more information, call the ATSDR Information Center at 1-800-232-4636. This fact sheet is one in a series of summaries about hazardous substances and their health effects. It is important you understand this information because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

- [Highlights](#)
- [What is arsenic?](#)
- [What happens to arsenic when it enters the environment?](#)
- [How might I be exposed to arsenic?](#)
- [How can arsenic affect my health?](#)
- [How likely is arsenic to cause cancer?](#)
- [How does arsenic affect children?](#)
- [How can families reduce their risk for exposure to arsenic?](#)
- [Is there a medical test to show whether I've been exposed to arsenic?](#)
- [Has the federal government made recommendations to protect human health?](#)
- [References](#)
- [Contact Information](#)

### Highlights

Exposure to higher than average levels of arsenic occur mostly in the workplace, near hazardous waste sites, or in areas with high natural levels. At high levels, inorganic arsenic can cause death. Exposure to lower levels for a long time can cause a discoloration of the skin and the appearance of small corns or warts. Arsenic has been found in at least 1,149 of the 1,684 National Priority List sites identified by the Environmental Protection Agency (EPA).

### What is arsenic?

Arsenic is a naturally occurring element widely distributed in the earth's crust. In the environment, arsenic is combined with oxygen, chlorine, and sulfur to form inorganic arsenic compounds. Arsenic in animals and plants combines with carbon and hydrogen to form organic arsenic compounds.

Inorganic arsenic compounds are mainly used to preserve wood. Copper chromated arsenate (CCA) is used to make "pressure-treated" lumber. CCA is no longer used in the U.S. for residential uses; it is still used in industrial applications. Organic arsenic compounds are used as pesticides, primarily on cotton fields and orchards.

### What happens to arsenic when it enters the environment?

- Arsenic occurs naturally in soil and minerals and may enter the air, water, and land from wind-blown dust and may get into water from runoff and leaching.
- Arsenic cannot be destroyed in the environment. It can only change its form.
- Rain and snow remove arsenic dust particles from the air.
- Many common arsenic compounds can dissolve in water. Most of the arsenic in water will ultimately end up in soil or sediment.
- Fish and shellfish can accumulate arsenic; most of this arsenic is in an organic form called arsenobetaine that is much less harmful.

### How might I be exposed to arsenic?

- Ingesting small amounts present in your food and water or breathing air containing arsenic.
- Breathing sawdust or burning smoke from wood treated with arsenic.
- Living in areas with unusually high natural levels of arsenic in rock.
- Working in a job that involves arsenic production or use, such as copper or lead smelting, wood treating, or pesticide application.

### How can arsenic affect my health?

Breathing high levels of inorganic arsenic can give you a sore throat or irritated lungs.

Ingesting very high levels of arsenic can result in death. Exposure to lower levels can cause nausea and vomiting, decreased production of red and white blood cells, abnormal heart rhythm, damage to blood vessels, and a sensation of "pins and needles" in hands and feet.

Ingesting or breathing low levels of inorganic arsenic for a long time can cause a darkening of the skin and the appearance of small "corns" or "warts" on the palms, soles, and torso.

Skin contact with inorganic arsenic may cause redness and swelling.

Almost nothing is known regarding health effects of organic arsenic compounds in humans. Studies in animals show that some simple organic arsenic compounds are less toxic than inorganic forms. Ingestion of methyl and dimethyl compounds can cause diarrhea and damage to the kidneys.

### How likely is arsenic to cause cancer?

Several studies have shown that ingestion of inorganic arsenic can increase the risk of skin cancer and cancer in the liver, bladder, and lungs. Inhalation of inorganic arsenic can cause increased risk of lung cancer. The Department of Health and Human Services (DHHS) and the EPA have determined that inorganic arsenic is a known human carcinogen. The International Agency for Research on Cancer (IARC) has determined that inorganic arsenic is carcinogenic to humans.

### How does arsenic affect children?

There is some evidence that long-term exposure to arsenic in children may result in lower IQ scores. There is also some evidence that exposure to arsenic in the womb and early childhood may increase mortality in young adults.

There is some evidence that inhaled or ingested arsenic can injure pregnant women or their unborn babies, although the studies are not definitive. Studies in animals show that large doses of arsenic that cause illness in pregnant females, can also cause low birth weight, fetal malformations, and even fetal death. Arsenic can cross the placenta and has been found in fetal tissues. Arsenic is found at low levels in breast milk.

### How can families reduce their risk for exposure to arsenic?

- If you use arsenic-treated wood in home projects, you should wear dust masks, gloves, and protective clothing to decrease exposure to sawdust.
- If you live in an area with high levels of arsenic in water or soil, you should use cleaner sources of water and limit contact with soil.
- If you work in a job that may expose you to arsenic, be aware that you may carry arsenic home on your clothing, skin, hair, or tools. Be sure to shower and change clothes before going home.

### Is there a medical test to show whether I've been exposed to arsenic?

There are tests available to measure arsenic in your blood, urine, hair, and fingernails. The urine test is the most reliable test for arsenic exposure within the last few days. Tests on hair and fingernails can measure exposure to high levels of arsenic over the past 6-12 months. These tests can determine if you have been exposed to above-average levels of arsenic. They cannot predict whether the arsenic levels in your body will affect your health.

### Has the federal government made recommendations to protect human health?

The EPA has set limits on the amount of arsenic that industrial sources can release to the environment and has restricted or cancelled many of the uses of arsenic in pesticides. EPA has set a limit of 0.01 parts per million (ppm) for arsenic in drinking water.

The Occupational Safety and Health Administration (OSHA) has set a permissible exposure limit (PEL) of 10 micrograms of arsenic per cubic meter of workplace air ( $10 \mu\text{g}/\text{m}^3$ ) for 8 hour shifts and 40 hour work weeks.

### References

Agency for Toxic Substances and Disease Registry (ATSDR). 2007. [Toxicological Profile for Arsenic \(Update\)](#). Atlanta, GA: U.S. Department of Health and Human Services, Public Health Service.

### Where can I get more information?

#### For more information, contact:

Agency for Toxic Substances and Disease Registry  
Division of Toxicology and Environmental Medicine  
1600 Clifton Road NE, Mailstop F-62  
Atlanta, GA 30333  
Phone: 1-800-CDC-INFO • 888-232-6348 (TTY)  
FAX: 770-488-4178  
Email: [cdcinfo@cdc.gov](mailto:cdcinfo@cdc.gov)

ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.

This page was updated on 10/05/2007



## U.S. Environmental Protection Agency

# Pesticides: Topical & Chemical Fact Sheets

[Recent Additions](#) | [Contact Us](#) | [Print Version](#) Search:  **GO**

[EPA Home](#) > [Pesticides](#) > [About Pesticides](#) > [Fact Sheets](#) > [Health and Safety](#) > [Assessing Health Risks from Pesticides](#)

Health & Safety

Specific Chemicals

Regulatory Actions

## Assessing Health Risks from Pesticides

January 1999  
735-F-99-002

The Federal Government, in cooperation with the States, carefully regulates pesticides to ensure that they do not pose unreasonable risks to human health or the environment. As part of that effort, the Environmental Protection Agency (EPA) requires extensive test data from pesticide producers that demonstrate pesticide products can be used without posing harm to human health and the environment. EPA scientists and analysts carefully review these data to determine whether to register (license) a pesticide product or a use and whether specific restrictions are necessary. This fact sheet is a brief overview of EPA's process for assessing potential risks to human health when evaluating pesticide products.

### Background

There are more than 865 active ingredients registered as pesticides, which are formulated into thousands of pesticide products that are available in the marketplace. About 350 pesticides are used on the foods we eat, and to protect our homes and pets.

EPA plays a critical role in evaluating these chemicals prior to registration, and in reevaluating older pesticides already on the market, to ensure that they can be used with a reasonable certainty of no harm. The process EPA uses for evaluating the health impacts of a pesticide is called risk assessment.

EPA uses the National Research Council's four-step process for human health risk assessment:

**Step One:** Hazard Identification

**Step Two:** Dose-Response Assessment

**Step Three:** Exposure Assessment

**Step Four:** Risk Characterization

### Step One: Hazard Identification (Toxicology)

The first step in the risk assessment process is to identify potential health effects that may occur from different types of pesticide exposure. EPA considers the full spectrum of a pesticide's potential health effects.

Generally, for human health risk assessments, many toxicity studies are conducted on animals by pesticide companies in independent laboratories and evaluated for acceptability by EPA scientists. EPA evaluates pesticides for a wide range of adverse effects, from eye and skin irritation to cancer and birth defects in laboratory animals. EPA may also consult the public literature or other sources of supporting information on any aspect of the chemical.

## Step Two: Dose-Response Assessment

Paracelsus, the Swiss physician and alchemist, the "father" of modern toxicology (1493-1541) said,

"The dose makes the poison."

In other words, **the amount of a substance a person is exposed to** is as important as **how toxic the chemical might be**. For example, small doses of aspirin can be beneficial to people, but at very high doses, this common medicine can be deadly. In some individuals, even at very low doses, aspirin may be deadly.

Dose-response assessment involves considering the dose levels at which adverse effects were observed in test animals, and using these dose levels to calculate an equal dose in humans.

## Step Three: Exposure Assessment

People can be exposed to pesticides in three ways:

1. Inhaling pesticides (inhalation exposure),
2. Absorbing pesticides through the skin (dermal exposure), and
3. Getting pesticides in their mouth or digestive tract (oral exposure).

Depending on the situation, pesticides could enter the body by any one or all of these routes. Typical sources of pesticide exposure include:

- **Food**

Most of the foods we eat have been grown with the use of pesticides. Therefore, pesticide residues may be present inside or on the surfaces of these foods.

- **Home and Personal Use Pesticides**

You might use pesticides in and around your home to control insects, weeds, mold, mildew, bacteria, lawn and garden pests and to protect your pets from pests such as fleas. Pesticides may also be used as insect repellants which are directly applied to the skin or clothing.

- **Pesticides in Drinking Water**

Some pesticides that are applied to farmland or other land structures can make their way in small amounts to the ground water or surface water systems that feed drinking water supplies.

- **Worker Exposure to Pesticides**

Pesticide applicators, vegetable and fruit pickers and others who work around pesticides can be exposed due to the nature of their jobs. To address the unique risks workers face from occupational exposure, EPA evaluates occupational exposure through a separate program. All pesticides registered by EPA have been shown to be safe when used properly.

## Step Four: Risk Characterization

Risk characterization is the final step in assessing human health risks from pesticides. It is the process of combining the hazard, dose-response and exposure assessments to describe the overall risk from a pesticide. It explains the assumptions used in assessing exposure as well as the uncertainties that are built into the dose-response assessment. The strength of the overall database is considered, and broad

conclusions are made. EPA's role is to evaluate both toxicity and exposure and to determine the risk associated with use of the pesticide.

Simply put,

$$\text{RISK} = \text{TOXICITY} \times \text{EXPOSURE}.$$

This means that the risk to human health from pesticide exposure depends on both the toxicity of the pesticide and the likelihood of people coming into contact with it. At least *some* exposure and *some* toxicity are required to result in a risk. For example, if the pesticide is very poisonous, but no people are exposed, there is no risk. Likewise, if there is ample exposure but the chemical is non-toxic, there is no risk. However, usually when pesticides are used, there is some toxicity and exposure, which results in a potential risk.

EPA recognizes that effects vary between animals of different species and from person to person. To account for this variability, *uncertainty factors* are built into the risk assessment. These uncertainty factors create an additional margin of safety for protecting people who may be exposed to the pesticides. FQPA requires EPA to use an extra 10-fold safety factor, if necessary, to protect infants and children from effects of the pesticide.

### **Types of Toxicity Tests EPA Requires for Human Health Risk Assessments**

EPA evaluates studies conducted over different periods of time and that measure specific types of effects. These tests are evaluated to screen for potential health effects in infants, children and adults.

**Acute Testing:** Short-term exposure; a single exposure (dose).

- Oral, dermal (skin), and inhalation exposure
- Eye irritation
- Skin irritation
- Skin sensitization
- Neurotoxicity

**Sub-chronic Testing:** Intermediate exposure; repeated exposure over a longer period of time (i.e., 30-90 days).

- Oral, dermal (skin), and inhalation
- Neurotoxicity (nerve system damage)

**Chronic Toxicity Testing:** Long-term exposure; repeated exposure lasting for most of the test animal's life span. Intended to determine the effects of a pesticide after prolonged and repeated exposures.

- Chronic effects (non-cancer)
- Carcinogenicity (cancer)

**Developmental and Reproductive Testing:** Identify effects in the fetus of an exposed pregnant female (birth defects) and how pesticide exposure affects the ability of a test animal to successfully reproduce.

**Mutagenicity Testing:** Assess a pesticide's potential to affect the cell's genetic components.

**Hormone Disruption:** Measure effects for their potential to disrupt the endocrine system. The endocrine system consists of a set of glands and the hormones they produce that help guide the development, growth, reproduction, and behavior of animals including humans.

## Risk Management

Once EPA completes the risk assessment process for a pesticide, we use this information to determine if (when used according to label directions), there is a reasonable certainty that the pesticide will not harm a person's health.

Using the conclusions of a risk assessment, EPA can then make a more informed decision regarding whether to approve a pesticide chemical or use, as proposed, or whether additional protective measures are necessary to limit occupational or non-occupational exposure to a pesticide. For example, EPA may prohibit a pesticide from being used on certain crops because consuming too much food treated with the pesticide may result in an unacceptable risk to consumers. Another example of protective measures is requiring workers to wear personal protective equipment (PPE) such as a respirator or chemical resistant gloves, or not allowing workers to enter treated crop fields until a specific period of time has passed.

If, after considering all appropriate risk reduction measures, the pesticide still does not meet EPA's safety standard, the Agency will not allow the proposed chemical or use. Regardless of the specific measures enforced, EPA's primary goal is to ensure that legal uses of the pesticide are protective of human health, especially the health of children, and the environment.

## Human Health Risk Assessment and the Law

Federal law requires detailed evaluation of pesticides to protect human health and the environment. In 1996, Congress made significant changes to strengthen pesticide laws through the Food Quality Protection Act (FQPA). Many of these changes are key elements of the current risk assessment process. FQPA required that EPA consider:

- **A New Safety Standard:** FQPA strengthened the safety standard that pesticides must meet before being approved for use. EPA must ensure with a reasonable certainty that no harm will result from the legal uses of the pesticide.
- **Exposure from All Sources:** In evaluating a pesticide, EPA must estimate the combined risk from that pesticide from all non-occupational sources, such as:
  - Food Sources
  - Drinking Water Sources
  - Residential Sources
- **Cumulative Risk:** EPA is required to evaluate pesticides in light of similar toxic effects that different pesticides may share, or "a common mechanism of toxicity." At this time, EPA is developing a methodology for this type of assessment.
- **Special Sensitivity of Children to Pesticides:** EPA must ascertain whether there is an increased susceptibility from exposure to the pesticide to infants and children. EPA must build an additional 10-fold safety factor into risk assessments to ensure the protection of infants and children, unless it is determined that a lesser margin of safety will be safe for infants and children.

## For More Information

If you would like more information about EPA's pesticide programs, contact the Communication Service Branch at (703) 305-5017 or visit the [Pesticides Web site](#).

For more information on specific pesticides, or to inquire about the symptoms of pesticide poisoning, call the National Pesticide Information Center (NPIC), a toll-free hotline information at: 1-800-858-7378, or visit their [Web site](#) [\[EXIT Disclaimer\]](#).


[Publications](#) | [Glossary](#) | [A-Z Index](#) | [Jobs](#)

---

[EPA Home](#) | [Privacy and Security Notice](#) | [Contact Us](#)

Last updated on Tuesday, May 2nd, 2006

URL: <http://www.epa.gov/pesticides/factsheets/riskassess.htm>



## CONTENTS

### [Highlights](#)

[What are polychlorinated biphenyls \(PCBs\)?](#)

[What happens to polychlorinated biphenyls \(PCBs\) when they enter the environment?](#)

[How might I be exposed to polychlorinated biphenyls \(PCBs\)?](#)

[How can polychlorinated biphenyls \(PCBs\) affect my health?](#)

[How likely are polychlorinated biphenyls \(PCBs\) to cause cancer?](#)

[How do polychlorinated biphenyls \(PCBs\) affect children?](#)

[How can families reduce the risk of exposure to polychlorinated biphenyls \(PCBs\)??](#)

[Is there a medical test to show whether I've been exposed to polychlorinated biphenyls \(PCBs\)?](#)

[Has the federal government made recommendations to protect human health?](#)

[References](#)

February 2001

# ToxFAQs™ for Polychlorinated Biphenyls (PCBs) *(Bifenilos Policlorados (BPCs))*

This fact sheet answers the most frequently asked health questions about polychlorinated biphenyls (PCBs). For more information, you may call the ATSDR Information Center at 1-888-422-8737. This fact sheet is one in a series of summaries about hazardous substances and their health effects. This information is important because this substance may harm you. The effects of exposure to any hazardous substance depend on the dose, the duration, how you are exposed, personal traits and habits, and whether other chemicals are present.

**HIGHLIGHTS:** Polychlorinated biphenyls (PCBs) are a mixture of individual chemicals which are no longer produced in the United States, but are still found in the environment. Health effects that have been associated with exposure to PCBs include acne-like skin conditions in adults and neurobehavioral and immunological changes in children. PCBs are known to cause cancer in animals. PCBs have been found in at least 500 of the 1,598 National Priorities List sites identified by the Environmental Protection Agency (EPA).

## What are polychlorinated biphenyls (PCBs)?

Polychlorinated biphenyls are mixtures of up to 209 individual chlorinated compounds (known as congeners). There are no known natural sources of PCBs. PCBs are either oily liquids or solids that are colorless to light yellow. Some PCBs can exist as a vapor in air. PCBs have no known smell or taste. Many commercial PCB mixtures are known in the U.S. by the trade name Aroclor.

PCBs have been used as coolants and lubricants in transformers, capacitors, and other electrical equipment because they don't burn easily and are good insulators. The manufacture of PCBs was stopped in the U.S. in 1977 because of evidence they build up in the environment and can cause harmful health effects. Products made before 1977 that may contain PCBs include old fluorescent lighting fixtures and electrical devices containing PCB capacitors,

[Contact Information](#)**RELATED RESOURCES**[ToxFAQ™](#)  35k[ToxFAQ™ en Español](#)  32k[Public Health Statement](#)  125k[Public Health Statement en Español](#)  321k[Toxicological Profile](#)  13.6MB**A-Z INDEX**[A](#) [B](#) [C](#)[D](#) [E](#)[F](#) [G](#) [H](#) [I](#)[J](#) [K](#)[L](#) [M](#) [N](#) [O](#) [P](#)[Q](#) [R](#) [S](#)[T](#) [U](#)[V](#) [W](#) [X](#) [Y](#) [Z](#)**ATSDR RESOURCES**[ToxFAQs™](#)[ToxFAQs™ en Español](#)[Public Health Statements](#)[Toxicological Profiles](#)[Minimum Risk Levels](#)[MMGs](#)[MHMIs](#)[Interaction Profiles](#)[Priority List of](#)[Hazardous Substances](#)[Division of Toxicology](#)

and old microscope and hydraulic oils.

[back to top](#)**What happens to polychlorinated biphenyls (PCBs) when they enter the environment?**

- PCBs entered the air, water, and soil during their manufacture, use, and disposal; from accidental spills and leaks during their transport; and from leaks or fires in products containing PCBs.
- PCBs can still be released to the environment from hazardous waste sites; illegal or improper disposal of industrial wastes and consumer products; leaks from old electrical transformers containing PCBs; and burning of some wastes in incinerators.
- PCBs do not readily break down in the environment and thus may remain there for very long periods of time. PCBs can travel long distances in the air and be deposited in areas far away from where they were released. In water, a small amount of PCBs may remain dissolved, but most stick to organic particles and bottom sediments. PCBs also bind strongly to soil.
- PCBs are taken up by small organisms and fish in water. They are also taken up by other animals that eat these aquatic animals as food. PCBs accumulate in fish and marine mammals, reaching levels that may be many thousands of times higher than in water.

[back to top](#)**How might I be exposed to polychlorinated biphenyls (PCBs)?**

- Using old fluorescent lighting fixtures and electrical devices and appliances, such as television sets and refrigerators, that were made 30 or more years ago. These items may leak small amounts of PCBs into the air when they get hot during operation, and could be a source of skin exposure.
- Eating contaminated food. The main dietary sources of PCBs are fish (especially sportfish caught in contaminated lakes or rivers), meat, and dairy products.
- Breathing air near hazardous waste sites and drinking contaminated well water.
- In the workplace during repair and maintenance of PCB transformers; accidents, fires or spills involving transformers, fluorescent lights, and other old electrical devices; and disposal of PCB materials.

[back to top](#)**How can polychlorinated biphenyls (PCBs) affect my health?**

The most commonly observed health effects in people exposed to large amounts of PCBs are skin conditions such as acne and rashes. Studies in exposed workers have shown changes in blood and urine that may indicate liver damage. PCB exposures in the general population are not likely to result in skin and liver effects. Most of the studies of health effects of PCBs in the general population examined children of mothers who were exposed to PCBs.

Animals that ate food containing large amounts of PCBs for short periods of time had mild liver damage and some died. Animals that ate smaller amounts of PCBs in food over several weeks or months developed various kinds of health effects, including anemia; acne-like skin conditions; and liver, stomach, and thyroid gland injuries. Other effects of PCBs in animals include changes in the immune system, behavioral alterations, and impaired reproduction. PCBs are not known to cause birth defects.

[back to top](#)

---

### **How likely are polychlorinated biphenyls (PCBs) to cause cancer?**

Few studies of workers indicate that PCBs were associated with certain kinds of cancer in humans, such as cancer of the liver and biliary tract. Rats that ate food containing high levels of PCBs for two years developed liver cancer. The Department of Health and Human Services (DHHS) has concluded that PCBs may reasonably be anticipated to be carcinogens. The EPA and the International Agency for Research on Cancer (IARC) have determined that PCBs are probably carcinogenic to humans.

[back to top](#)

---

### **How do polychlorinated biphenyls (PCBs) affect children?**

Women who were exposed to relatively high levels of PCBs in the workplace or ate large amounts of fish contaminated with PCBs had babies that weighed slightly less than babies from women who did not have these exposures. Babies born to women who ate PCB-contaminated fish also showed abnormal responses in tests of infant behavior. Some of these behaviors, such as problems with motor skills and a decrease in short-term memory, lasted for several years. Other studies suggest that the immune system was affected in children born to and nursed by mothers exposed to increased levels of PCBs. There are no reports of structural birth defects caused by exposure to PCBs or of health effects of PCBs in older children. The most likely way infants will be exposed to PCBs is from breast milk. Transplacental transfers of PCBs were also reported. In most cases, the benefits of breast-feeding outweigh any risks from exposure to PCBs in mother's milk.

[back to top](#)

---

### **How can families reduce the risk of exposure to polychlorinated biphenyls (PCBs)?**

- You and your children may be exposed to PCBs by eating fish or wildlife caught from contaminated locations. Certain states, Native American tribes, and U.S. territories have issued advisories to warn people about PCB-contaminated fish and fish-eating wildlife. You can reduce your family's exposure to PCBs by obeying these advisories.
- Children should be told not play with old appliances, electrical equipment, or transformers, since they may contain PCBs.
- Children should be discouraged from playing in the dirt near hazardous waste sites and in areas where there was a transformer fire. Children should also be discouraged from eating dirt and putting dirty hands, toys or other objects in their mouths, and should wash hands frequently.
- If you are exposed to PCBs in the workplace it is possible to carry them home on your clothes, body, or tools. If this is the case, you should shower and change clothing before leaving work, and your work clothes should be kept separate from other clothes and laundered separately.

[back to top](#)

---

### **Is there a medical test to show whether I've been exposed to polychlorinated biphenyls (PCBs)?**

Tests exist to measure levels of PCBs in your blood, body fat, and breast milk, but these are not routinely conducted. Most people normally have low levels of PCBs in their body because nearly everyone has been environmentally exposed to PCBs. The tests can show if your PCB levels are elevated, which would indicate past exposure to above-normal levels of PCBs, but cannot determine when or how long you were exposed or whether you will develop health effects.

[back to top](#)

---

### **Has the federal government made recommendations to protect human health?**

The EPA has set a limit of 0.0005 milligrams of PCBs per liter of drinking water (0.0005 mg/L). Discharges, spills or accidental releases of 1 pound or more of PCBs into the environment must be reported to the EPA. The Food and Drug Administration (FDA) requires that infant foods, eggs, milk and other dairy products, fish and shellfish, poultry and red meat contain no more than 0.2-3 parts of PCBs per million parts (0.2-3 ppm) of food. Many states have established fish and wildlife consumption advisories for PCBs.

[back to top](#)

## References

Agency for Toxic Substances and Disease Registry (ATSDR).  
2000. Toxicological Profile for polychlorinated biphenyls (PCBs).  
Atlanta, GA: U.S. Department of Health and Human Services,  
Public Health Service.

[back to top](#)

## Where can I get more information?

ATSDR can tell you where to find occupational and environmental health clinics. Their specialists can recognize, evaluate, and treat illnesses resulting from exposure to hazardous substances. You can also contact your community or state health or environmental quality department if you have any more questions or concerns.

## For more information, contact:

Agency for Toxic Substances and Disease Registry  
Division of Toxicology  
1600 Clifton Road NE, Mailstop F-32  
Atlanta, GA 30333  
Phone: 1-888-42-ATSDR (1-888-422-8737)  
FAX: (770)-488-4178  
Email: [ATSDRIC@cdc.gov](mailto:ATSDRIC@cdc.gov)

[back to top](#)


---

ATSDR Information Center / [ATSDRIC@cdc.gov](mailto:ATSDRIC@cdc.gov) / 1-888-422-8737

This page was updated on January , 2007

---

[ATSDR Home](#) | [Search](#) | [Index](#) | [Glossary](#) | [Contact Us](#)  
[About ATSDR](#) | [News Archive](#) | [ToxFAQs](#) | [HazDat](#) | [Public Health Assessments](#)  
[Privacy Policy](#) | [External Links Disclaimer](#) | [Accessibility](#)  
U.S. Department of Health and Human Services



[Home](#) > [CERCLA 2007 CERCLA Substance List](#)

## 2007 CERCLA Priority List of Hazardous Substances

2007 RANK	SUBSTANCE NAME	TOTAL POINTS	2005 RANK	CAS #
1	ARSENIC	1672.58	1	007440-38-2
2	LEAD	1534.07	2	007439-92-1
3	MERCURY	1504.69	3	007439-97-6
4	VINYL CHLORIDE	1387.75	4	000075-01-4
5	POLYCHLORINATED BIPHENYLS	1365.78	5	001336-36-3
6	BENZENE	1355.96	6	000071-43-2
7	CADMIUM	1324.22	8	007440-43-9
8	POLYCYCLIC AROMATIC HYDROCARBONS	1316.98	7	130498-29-2
9	BENZO(A)PYRENE	1312.45	9	000050-32-8
10	BENZO(B)FLUORANTHENE	1266.55	10	000205-99-2
11	CHLOROFORM	1223.03	11	000067-66-3
12	DDT, P,P'-	1193.36	12	000050-29-3
13	AROCLOR 1254	1182.63	13	011097-69-1
14	AROCLOR 1260	1177.77	14	011096-82-5
15	DIBENZO(A,H)ANTHRACENE	1165.88	15	000053-70-3
16	TRICHLOROETHYLENE	1154.73	16	000079-01-6
17	DIELDRIN	1150.91	17	000060-57-1
18	CHROMIUM, HEXAVALENT	1149.98	18	018540-29-9
19	PHOSPHORUS, WHITE	1144.77	19	007723-14-0
20	CHLORDANE	1133.21	21	000057-74-9
21	DDE, P,P'-	1132.49	20	000072-55-9
22	HEXACHLOROBUTADIENE	1129.63	22	000087-68-3
23	COAL TAR CREOSOTE	1124.32	23	008001-58-9
24	ALDRIN	1117.22	25	000309-00-2
25	DDD, P,P'-	1114.83	24	000072-54-8
26	BENZIDINE	1114.24	26	000092-87-5
27	AROCLOR 1248	1112.20	27	012672-29-6
28	CYANIDE	1099.48	28	000057-12-5
29	AROCLOR 1242	1093.14	29	053469-21-9
30	AROCLOR	1091.52	62	012767-79-2
31	TOXAPHENE	1086.65	30	008001-35-2
32	HEXACHLOROCYCLOHEXANE, GAMMA-	1081.63	32	000058-89-9
33	TETRACHLOROETHYLENE	1080.43	31	000127-18-4
34	HEPTACHLOR	1072.67	33	000076-44-8
35	1,2-DIBROMOETHANE	1064.06	34	000106-93-4
36	HEXACHLOROCYCLOHEXANE, BETA-	1060.22	37	000319-85-7
37	ACROLEIN	1059.07	36	000107-02-8
38	DISULFOTON	1058.85	35	000298-04-4
39	BENZO(A)ANTHRACENE	1057.96	38	000056-55-3
40	3,3'-DICHLOROBENZIDINE	1051.61	39	000091-94-1

41	ENDRIN	1048.57	41	000072-20-8
42	BERYLLIUM	1046.12	40	007440-41-7
43	HEXACHLOROCYCLOHEXANE, DELTA-	1038.27	42	000319-86-8
44	1,2-DIBROMO-3-CHLOROPROPANE	1035.55	43	000096-12-8
45	PENTACHLOROPHENOL	1028.01	45	000087-86-5
46	HEPTACHLOR EPOXIDE	1027.12	44	001024-57-3
47	CARBON TETRACHLORIDE	1023.32	46	000056-23-5
48	AROCLOR 1221	1018.41	47	011104-28-2
49	COBALT	1015.57	50	007440-48-4
50	DDT, O,P'-	1014.71	49	000789-02-6
51	AROCLOR 1016	1014.33	48	012674-11-2
52	DI-N-BUTYL PHTHALATE	1007.49	52	000084-74-2
53	NICKEL	1005.40	55	007440-02-0
54	ENDOSULFAN	1004.65	54	000115-29-7
55	ENDOSULFAN SULFATE	1003.56	53	001031-07-8
56	DIAZINON	1002.08	57	000333-41-5
57	ENDOSULFAN, ALPHA	1001.30	58	000959-98-8
58	XYLENES, TOTAL	996.07	59	001330-20-7
59	CIS-CHLORDANE	995.08	51	005103-71-9
60	DIBROMOCHLOROPROPANE	994.87	60	067708-83-2
61	METHOXYCHLOR	994.47	61	000072-43-5
62	BENZO(K)FLUORANTHENE	981.26	63	000207-08-9
63	ENDRIN KETONE	978.99	64	053494-70-5
64	TRANS-CHLORDANE	973.99	56	005103-74-2
65	CHROMIUM(VI) OXIDE	969.58	66	001333-82-0
66	METHANE	959.78	67	000074-82-8
67	ENDOSULFAN, BETA	959.19	65	033213-65-9
68	AROCLOR 1232	955.64	68	011141-16-5
69	ENDRIN ALDEHYDE	954.86	69	007421-93-4
70	BENZOFUORANTHENE	951.48	70	056832-73-6
71	TOLUENE	947.50	71	000108-88-3
72	2-HEXANONE	942.02	72	000591-78-6
73	2,3,7,8-TETRACHLORODIBENZO-P-DIOXIN	938.11	73	001746-01-6
74	ZINC	932.89	74	007440-66-6
75	DIMETHYLARSINIC ACID	922.06	75	000075-60-5
76	DI(2-ETHYLHEXYL)PHTHALATE	919.02	76	000117-81-7
77	CHROMIUM	908.52	77	007440-47-3
78	NAPHTHALENE	896.67	78	000091-20-3
79	1,1-DICHLOROETHENE	891.19	79	000075-35-4
80	METHYLENE CHLORIDE	888.96	81	000075-09-2
81	AROCLOR 1240	888.11	80	071328-89-7
82	2,4,6-TRINITROTOLUENE	883.59	82	000118-96-7
83	BROMODICHLOROETHANE	870.00	83	000683-53-4
84	HYDRAZINE	864.41	85	000302-01-2
85	1,2-DICHLOROETHANE	863.99	84	000107-06-2
86	2,4,6-TRICHLOROPHENOL	863.71	86	000088-06-2
87	2,4-DINITROPHENOL	860.45	87	000051-28-5
88	BIS(2-CHLOROETHYL) ETHER	859.88	88	000111-44-4
89	THIOCYANATE	849.21	89	000302-04-5
90	ASBESTOS	841.54	90	001332-21-4
91	CHLORINE	840.37	92	007782-50-5
92	CYCLOTRIMETHYLENETRINITRAMINE (RDX)	840.28	91	000121-82-4
93	HEXACHLOROBENZENE	838.34	93	000118-74-1

94	2,4-DINITROTOLUENE	837.88	96	000121-14-2
95	RADIUM-226	835.93	94	013982-63-3
96	ETHION	834.03	97	000563-12-2
97	1,1,1-TRICHLOROETHANE	833.81	95	000071-55-6
98	URANIUM	833.41	98	007440-61-1
99	ETHYLBENZENE	832.13	99	000100-41-4
100	RADIUM	828.07	100	007440-14-4
101	THORIUM	825.17	101	007440-29-1
102	4,6-DINITRO-O-CRESOL	822.78	102	000534-52-1
103	1,3,5-TRINITROBENZENE	820.17	103	000099-35-4
104	CHLOROBENZENE	819.69	105	000108-90-7
105	RADON	817.89	104	010043-92-2
106	RADIUM-228	816.76	106	015262-20-1
107	THORIUM-230	814.72	107	014269-63-7
107	URANIUM-235	814.72	107	015117-96-1
109	BARIIUM	813.46	109	007440-39-3
110	FLUORANTHENE	812.40	113	000206-44-0
111	URANIUM-234	812.11	110	013966-29-5
112	N-NITROSODI-N-PROPYLAMINE	811.05	111	000621-64-7
113	THORIUM-228	810.36	112	014274-82-9
114	RADON-222	809.78	114	014859-67-7
115	HEXACHLOROCYCLOHEXANE, ALPHA-	809.56	116	000319-84-6
116	1,2,3-TRICHLOROBENZENE	808.41	143	000087-61-6
117	MANGANESE	807.90	115	007439-96-5
118	COAL TARS	807.07	117	008007-45-2
119	CHRYSOTILE ASBESTOS	806.68	119	012001-29-5
119	STRONTIUM-90	806.68	119	010098-97-2
121	PLUTONIUM-239	806.67	118	015117-48-3
122	POLONIUM-210	806.39	122	013981-52-7
123	METHYLMERCURY	806.39	121	022967-92-6
124	PLUTONIUM-238	806.01	123	013981-16-3
125	LEAD-210	805.90	124	014255-04-0
126	PLUTONIUM	805.23	125	007440-07-5
127	CHLORPYRIFOS	804.93	125	002921-88-2
128	COPPER	804.86	133	007440-50-8
129	AMERICIUM-241	804.55	128	086954-36-1
130	RADON-220	804.54	127	022481-48-7
131	AMOSITE ASBESTOS	804.07	129	012172-73-5
132	IODINE-131	803.48	130	010043-66-0
133	HYDROGEN CYANIDE	803.08	132	000074-90-8
134	TRIBUTYL TIN	802.61	131	000688-73-3
135	GUTHION	802.32	134	000086-50-0
136	NEPTUNIUM-237	802.13	135	013994-20-2
137	CHRYSENE	802.10	139	000218-01-9
138	CHLORDECONE	801.64	136	000143-50-0
138	IODINE-129	801.64	136	015046-84-1
138	PLUTONIUM-240	801.64	136	014119-33-6
141	S,S,S-TRIBUTYL PHOSPHOROTRITHIOATE	797.88	140	000078-48-8
142	BROMINE	789.15	142	007726-95-6
143	POLYBROMINATED BIPHENYLS	789.11	141	067774-32-7
144	DICOFOL	787.56	144	000115-32-2
145	PARATHION	784.14	145	000056-38-2
146	1,1,2,2-TETRACHLOROETHANE	782.15	146	000079-34-5

147	SELENIUM	778.98	147	007782-49-2
	148	HEXACHLOROCYCLOHEXANE, TECHNICAL GRADE	774.91	148 000608-73-1
149	TRICHLOROFLUOROETHANE	770.74	149	027154-33-2
150	TRIFLURALIN	770.12	150	001582-09-8
151	DDD, O,P'-	768.73	151	000053-19-0
152	4,4'-METHYLENEBIS(2-CHLOROANILINE)	766.66	152	000101-14-4
153	HEXACHLORODIBENZO-P-DIOXIN	760.42	153	034465-46-8
154	HEPTACHLORODIBENZO-P-DIOXIN	754.47	154	037871-00-4
155	PENTACHLOROBENZENE	753.58	155	000608-93-5
156	1,3-BUTADIENE	747.31	201	000106-99-0
157	AMMONIA	745.55	156	007664-41-7
158	2-METHYLNAPHTHALENE	743.24	157	000091-57-6
159	1,4-DICHLOROBENZENE	737.32	159	000106-46-7
160	1,1-DICHLOROETHANE	736.23	158	000075-34-3
161	ACENAPHTHENE	731.25	160	000083-32-9
162	1,2,3,4,6,7,8,9-OCTACHLORODIBENZOFURAN	726.14	161	039001-02-0
163	1,1,2-TRICHLOROETHANE	724.96	162	000079-00-5
164	TRICHLOROETHANE	723.32	163	025323-89-1
165	HEXACHLOROCYCLOPENTADIENE	719.01	164	000077-47-4
166	HEPTACHLORODIBENZOFURAN	718.58	165	038998-75-3
167	1,2-DIPHENYLHYDRAZINE	713.90	166	000122-66-7
168	2,3,4,7,8-PENTACHLORODIBENZOFURAN	710.71	167	057117-31-4
169	TETRACHLOROBIPHENYL	709.21	168	026914-33-0
170	CRESOL, PARA-	707.83	169	000106-44-5
171	OXYCHLORDANE	706.32	170	027304-13-8
172	1,2-DICHLOROBENZENE	704.91	171	000095-50-1
173	1,2-DICHLOROETHENE, TRANS-	704.04	178	000156-60-5
174	INDENO(1,2,3-CD)PYRENE	703.30	180	000193-39-5
175	GAMMA-CHLORDENE	702.59	172	056641-38-4
176	CARBON DISULFIDE	702.55	174	000075-15-0
177	TETRACHLOROPHENOL	702.54	173	025167-83-3
178	AMERICIUM	701.62	175	007440-35-9
178	URANIUM-233	701.62	175	013968-55-3
180	PALLADIUM	700.66	177	007440-05-3
181	HEXACHLORODIBENZOFURAN	700.56	179	055684-94-1
182	PHENOL	696.96	183	000108-95-2
183	CHLOROETHANE	693.90	182	000075-00-3
184	ACETONE	693.31	181	000067-64-1
185	P-XYLENE	690.20	185	000106-42-3
186	DIBENZOFURAN	689.19	187	000132-64-9
187	ALUMINUM	688.13	186	007429-90-5
188	2,4-DIMETHYLPHENOL	685.76	189	000105-67-9
189	CARBON MONOXIDE	684.49	188	000630-08-0
190	TETRACHLOROETHANE	677.97	190	025322-20-7
191	HYDROGEN SULFIDE	676.51	193	007783-06-4
192	PENTACHLORODIBENZOFURAN	673.21	192	030402-15-4
193	CHLOROMETHANE	670.19	191	000074-87-3
194	BIS(2-METHOXYETHYL) PHTHALATE	666.08	194	034006-76-3
195	BUTYL BENZYL PHTHALATE	659.38	195	000085-68-7
196	CRESOL, ORTHO-	658.66	196	000095-48-7
197	HEXACHLOROETHANE	653.10	199	000067-72-1
198	VANADIUM	651.70	198	007440-62-2

199	N-NITROSODIMETHYLAMINE	650.71	200	000062-75-9
200	1,2,4-TRICHLOROBENZENE	647.30	203	000120-82-1
201	BROMOFORM	643.53	202	000075-25-2
202	TETRACHLORODIBENZO-P-DIOXIN	635.74	204	041903-57-5
203	1,3-DICHLOROBENZENE	631.41	205	000541-73-1
204	PENTACHLORODIBENZO-P-DIOXIN	625.12	207	036088-22-9
205	N-NITROSODIPHENYLAMINE	624.79	208	000086-30-6
206	1,2-DICHLOROETHYLENE	622.49	206	000540-59-0
207	2,3,7,8-TETRACHLORODIBENZOFURAN	622.15	210	051207-31-9
208	2-BUTANONE	620.01	209	000078-93-3
209	2,4-DICHLOROPHENOL	616.45	212	000120-83-2
210	1,4-DIOXANE	616.29	215	000123-91-1
211	FLUORINE	613.28	214	007782-41-4
212	NITRITE	612.64	216	014797-65-0
213	CESIUM-137	612.50	217	010045-97-3
214	SILVER	612.19	213	007440-22-4
215	CHROMIUM TRIOXIDE	610.85	218	007738-94-5
216	NITRATE	610.66	219	014797-55-8
217	POTASSIUM-40	608.91	220	013966-00-2
218	DINITROTOLUENE	607.65	221	025321-14-6
219	ANTIMONY	605.37	222	007440-36-0
220	COAL TAR PITCH	605.33	224	065996-93-2
221	THORIUM-227	605.32	223	015623-47-9
222	2,4,5-TRICHLOROPHENOL	604.83	225	000095-95-4
223	ARSENIC ACID	604.45	226	007778-39-4
224	ARSENIC TRIOXIDE	604.36	227	001327-53-3
225	PHORATE	603.10	228	000298-02-2
226	BENZOPYRENE	603.00	230	073467-76-2
227	CRESOLS	602.74	229	001319-77-3
228	CHLORDANE, TECHNICAL	602.62	231	012789-03-6
229	DIMETHOATE	602.61	232	000060-51-5
230	ACTINIUM-227	602.57	233	014952-40-0
230	STROBANE	602.57	233	008001-50-1
232	4-AMINOBIIPHENYL	602.51	235	000092-67-1
232	PYRETHRUM	602.51	235	008003-34-7
234	ARSINE	602.42	237	007784-42-1
235	NALED	602.32	238	000300-76-5
236	DIBENZOFURANS, CHLORINATED	602.13	239	042934-53-2
236	ETHOPROP	602.13	239	013194-48-4
238	ALPHA-CHLORDENE	601.94	241	056534-02-2
238	CARBOPHENOTHION	601.94	241	000786-19-6
240	DICHLORVOS	601.64	243	000062-73-7
241	CALCIUM ARSENATE	601.45	244	007778-44-1
241	MERCURIC CHLORIDE	601.45	244	007487-94-7
241	SODIUM ARSENITE	601.45	244	007784-46-5
244	FORMALDEHYDE	599.64	247	000050-00-0
245	2-CHLOROPHENOL	599.62	248	000095-57-8
246	PHENANTHRENE	597.68	249	000085-01-8
247	HYDROGEN FLUORIDE	588.03	250	007664-39-3
248	2,4-D ACID	584.47	251	000094-75-7
249	DIBROMOCHLOROMETHANE	580.59	252	000124-48-1
250	DIURON	579.16	253	000330-54-1
251	BUTYLATE	578.43	254	002008-41-5

252	DIMETHYL FORMAMIDE	578.23		
253	PYRENE	577.95	255	000068-12-2
254	DICHLOROBENZENE	577.70	256	000129-00-0
255	ETHYL ETHER	572.47	211	025321-22-6
256	DICHLOROETHANE	570.46	257	000060-29-7
257	4-NITROPHENOL	567.79	258	001300-21-6
258	1,3-DICHLOROPROPENE, CIS-	561.82	259	000100-02-7
259	PHOSPHINE	559.74	184	010061-01-5
260	TRICHLOROBENZENE	557.96	260	007803-51-2
261	2,6-DINITROTOLUENE	555.20	261	012002-48-1
262	FLUORIDE ION	549.64	262	000606-20-2
263	1,2,3,4,6,7,8-HEPTACHLORODIBENZO-P-DIOXIN	547.90	263	016984-48-8
264	METHYL PARATHION	545.83	264	035822-46-9
265	PENTAERYTHRITOL TETRANITRATE	545.59	265	000298-00-0
266	1,3-DICHLOROPROPENE, TRANS-	543.37	266	000078-11-5
267	BIS(2-ETHYLHEXYL)ADIPATE	540.20	267	010061-02-6
268	CARBAZOLE	534.52	268	000103-23-1
269	METHYL ISOBUTYL KETONE	533.24	269	000086-74-8
270	1,2-DICHLOROETHENE, CIS-	533.15	271	000108-10-1
271	STYRENE	532.70	270	000156-59-2
272	CARBARYL	530.98	272	000100-42-5
273	1,2,3,4,6,7,8-HEPTACHLORODIBENZOFURAN	529.45	273	000063-25-2
274	ACRYLONITRILE	528.28	274	067562-39-4
275	1-METHYLNAPHTHALENE	526.51	275	000107-13-1
			NEW	

Substances were assigned the same rank when two (or more) substances received equivalent total point scores.

CAS # = Chemical Abstracts Service Registry Number

This page was updated on 01/10/2008